




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN13B0150~53	2013/09/03	Cary	Change Logo From LTW To Amphenol



Pin Assignments
Front View

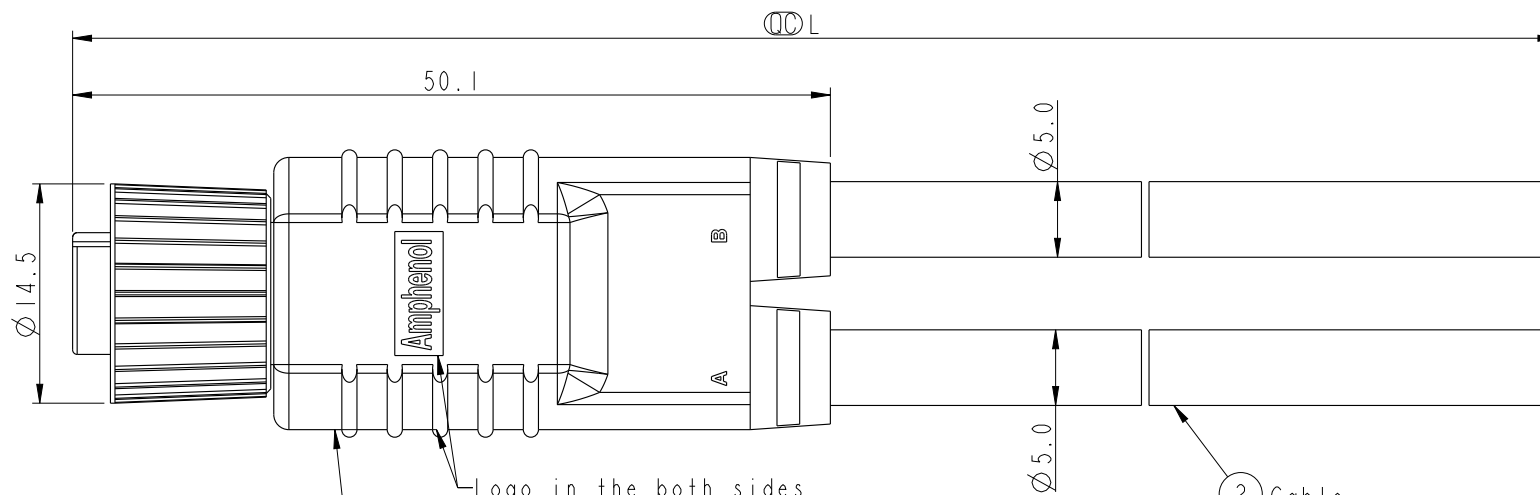

Logo in the both sides
兩面Logo

① SB-050000-F00-YS000
Color: Black

SB-050000-F00-YSBXX


XX: 01~99Meter
01: 01Meter
02: 02Meters

99: 99Meters

Cable Length(L): 01~99Meters

Note:

- * Important Dimension.
- * Waterproof Rate: IP68
IP68: 1M Depth Of Water In 24hours.
- * Housing: PU, Black
- * Female Pin: Phosphor Bronze, Gold Plated
- * O-Ring: Viton, Green
- * Screw Nut: Zn Alloy, Nicked Plated
- * Cable: NO HALOGEN 22AWG*5C+T,
Black, PU Jacket, UV Resistant, OD=5.0mm
- * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm



5	Green	Green	綠
4	Black	Black	黑
3	Blue	Blue	藍
2	White	White	白
1	Brown	Brown	棕
	A	B	
Conn.	Wire Color		
	Pin Out		

UNIT:mm
TOLERANCE
±0.5mm

TITLE M12 B 5Pin F Conn. F Pin,Y Cable			
SCALE 2:1	SIZE A4	SHEET 1 OF 1	
REV. B	WC-REV. A.2	Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Cary-liu	DATE 2013/09/03
DWG NO SB-050000-F00-YSBXX	CHECKED BY Tom-gu	DATE 2013/09/03
CUSTOMER ALTW	APPROVED BY Victor	DATE 2013/09/03