

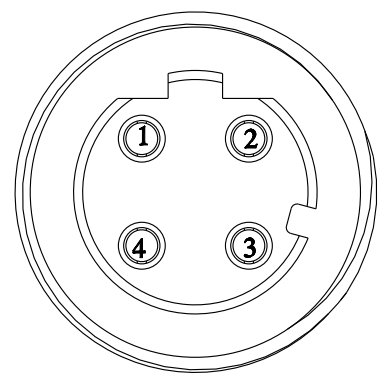



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN13B0188~91	2013-09-05	Cary	Change Logo From LTW To Amphenol



PIN ASSIGNMENTS
FRONT VIEW 前視圖

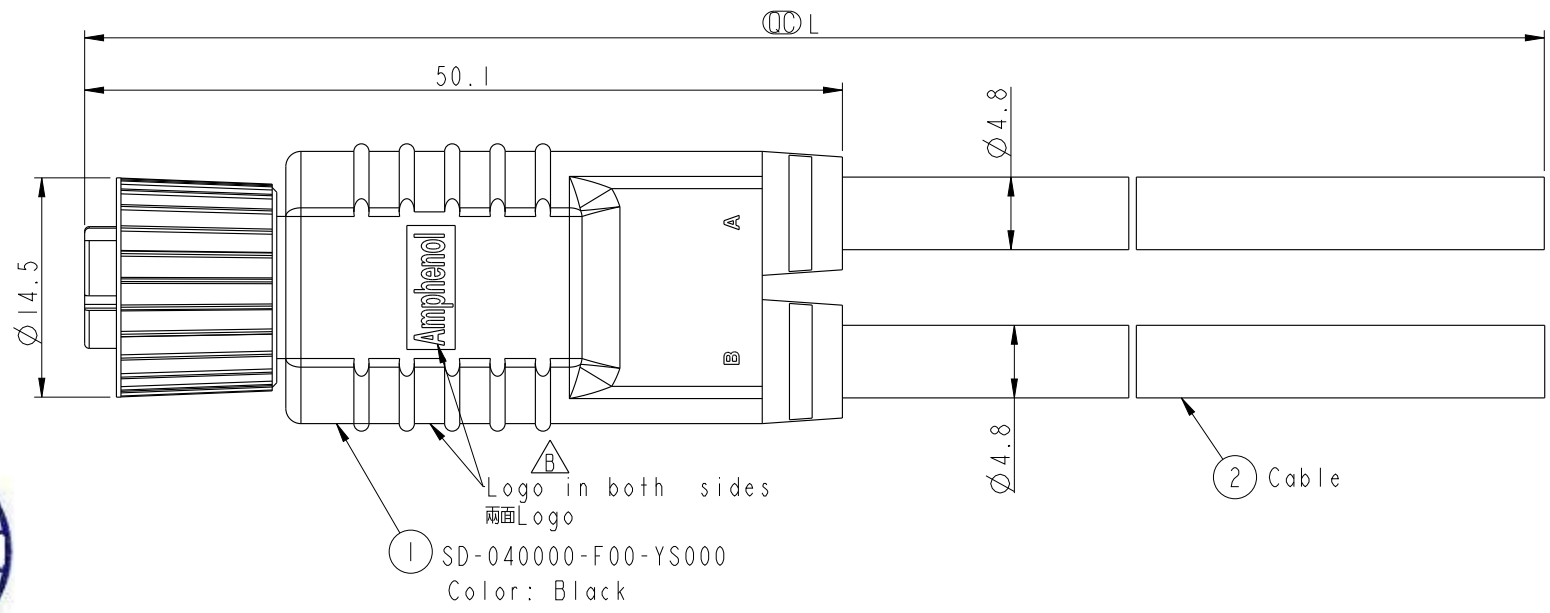

SD-040000-F00-YSBXX
XX:01~99Meter
01:01Meter
02:02Meters
.....
99:99Meters
Cable Length(L):01~99Meters

- Note:
- * $\varnothing$ Important Dimension To Check.
 - * Waterproof Rate: IP68
IP68: 1M Depth Of Water In 24hours.
 - * Housing: PU, Black.
 - * Female Pin: Copper Alloy, Gold Plated
 - * O-Ring: Viton, Green
 - * Screw Nut: Zn Alloy, Nicked Plated
 - * Cable: NO HALOGEN 22AWG*4C+INSULATION
Black, PU Jacket, UV Resistant, OD=4.8mm
 - * Cable Length Tolerance: 01M: ± 40 mm
02M~05M: ± 60 mm
06M~10M: ± 100 mm
11M~30M: ± 200 mm
31M~99M: ± 500 mm

4	Black	Black	黑
3	Blue	Blue	藍
2	White	White	白
1	Brown	Brown	棕
	A	B	
Conn.	Wire Color		
	Pin Out		

UNIT:mm		TITLE M12 D 4Pin F Conn. F Pin,Y Cable	
TOLERANCE ± 0.5 mm		SCALE 2:1	SIZE A4
REV. B	WC-REV. A.1	SHEET 1	OF 1
$\varnothing$ Inspection item			

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Cary_luu	DATE 2013/09/05
DWG NO SD-040000-F00-YSBXX	CHECKED BY Di_Lu	DATE 2013/09/05
CUSTOMER ALTW	APPROVED BY Victor	DATE 2013/09/05