


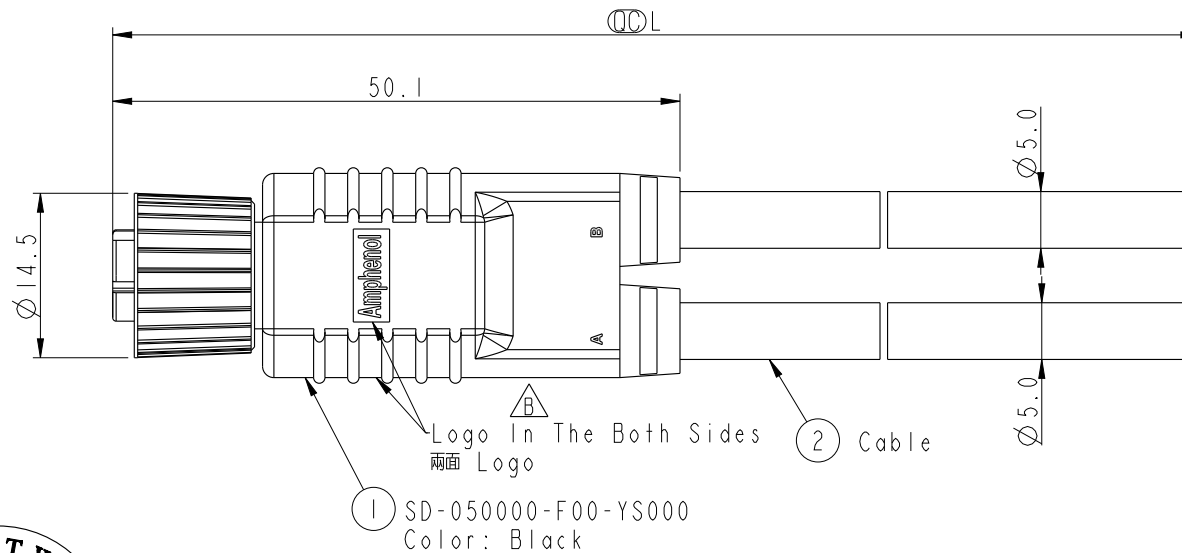


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN13B0130~33	2013-05-25	Cary	Change Logo From LTW To Amphenol



SD-050000-F00-YSBXX
 XX:01~99Meter
 01:01Meter
 02:02Meters

99:99Meters
 Cable Length(L):01~99Meters



Pin Assignments
 Front View 前視圖

5	Green	綠	Green	綠
4	Black	黑	Black	黑
3	Blue	藍	Blue	藍
2	White	白	White	白
1	Brown	棕	Brown	棕
	A		B	
Conn.	Wire Color		Pin Out	

- Note:
- * $\varnothing$ Important Dimension To Check.
 - * Δ Waterproof Rate: IP68.
IP68: 1M Depth Of Water In 24hours.
 - * Housing: PU, Black.
 - * Female Pin: Phosphor Bronze, Gold Plated
 - * O-Ring: Viton, Green
 - * Screw Nut: Zn Alloy, Nicked Plated
 - * Cable: NO HALOGEN 22AWG*5C+T,
Black, PU Jacket, UV Resistant, OD=5.0mm
 - * Δ Cable Length Tolerance: 01M: ± 40 mm
02M~05M: ± 60 mm
06M~10M: ± 100 mm
11M~30M: ± 200 mm
31M~99M: ± 500 mm

UNIT:mm		TITLE
TOLERANCE	± 0.5 mm	M12 D 5Pin F Conn. F Pin,Y Cable
REV.	B	SCALE 3:2
		SIZE A4
		SHEET 1 OF 1
		WC-REV. A.3
		$\varnothing$ Inspection item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	Cary_luu	2013/05/25
CUSTOMER	CHECKED BY	DATE
ALTW	Di_Lu	2013/05/25
	APPROVED BY	DATE
	Victor	2013/05/25

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.