
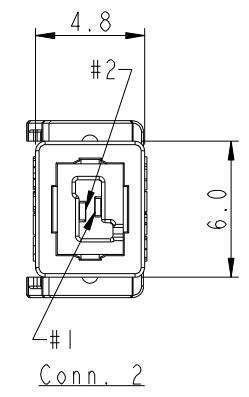
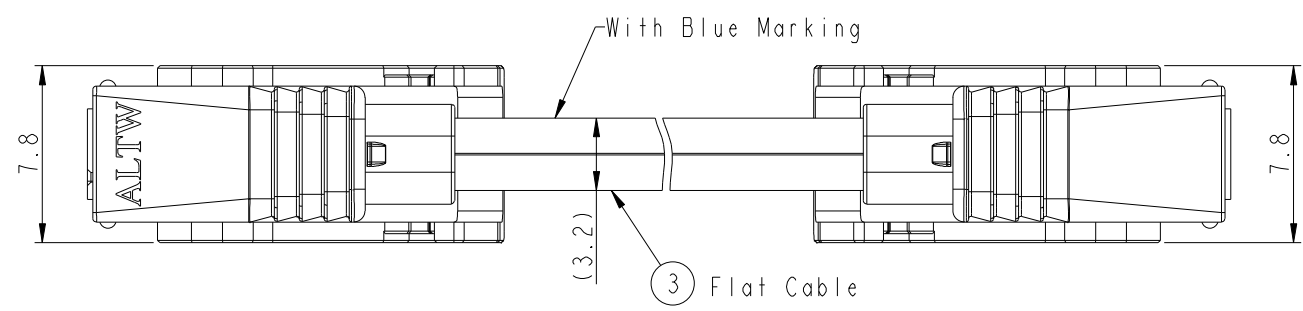
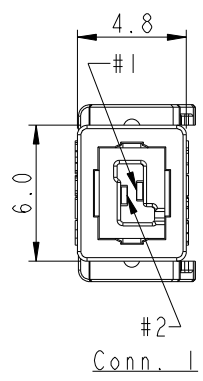


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2014-04-16	Fisher	Initial Release

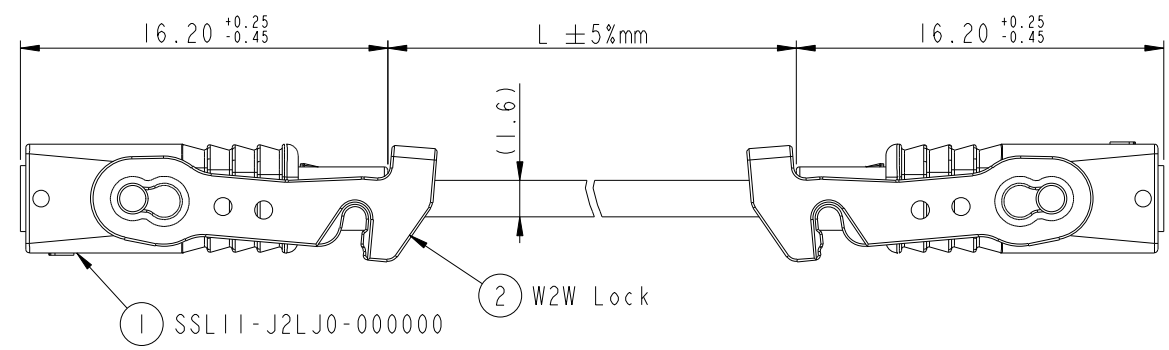


SSL11-J2L2J-T22DXX

06: L=600mm.
Cable Length Range(L): 100~9900mm

22: 22AWG

LOCK&LATCH OPTION
T: WITH W2W LOCK X 2



- Notes:
- * Ⓞ Important Dimensions To Check.
 - * Housing: Thermoplastic, UL94V-0, Natural White.
 - * Terminal: Copper Alloy, Gold Plated.
 - * Hood: Thermoplastic, UL94V-0, Natural White.
 - * SR Mold: PP, UL94V-0, Natural White.
 - * W2W Lock: Thermoplastic, UL94V-0, Natural White.
 - * Flat Cable: UL21016, 2F * 22AWG, XLPE Insulation, White

2	White	2
1	Blue Marking	1
Conn. 1	Wire Color	Conn. 2
Pin Out		

UNIT:mm			TITLE SSL1.1 Flat Cable, 2-Pos. W2W Lock X 2, Jack to Jack		
TOLERANCE	.X ±0.25		SCALE	3:1	SIZE A4
.XX ±0.1			REV.	A	WC-REV. A.1
.XXX ±0.05			SHEET 1 OF 1		
ANGLES ±1°			QC: Inspection item		

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Fisher_Wang	DATE 2014-04-16
DWG NO SSL11-J2L2J-T22DXX	CHECKED BY Ivan_Lin	DATE 2014-04-16
CUSTOMER ALTW	APPROVED BY Kevin_Hu	DATE 2014-04-16