

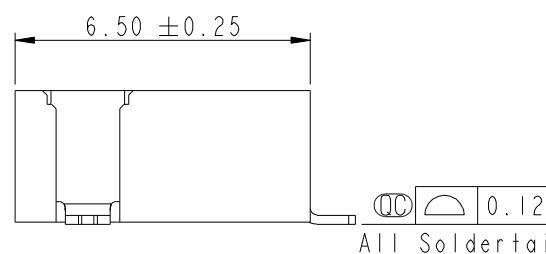
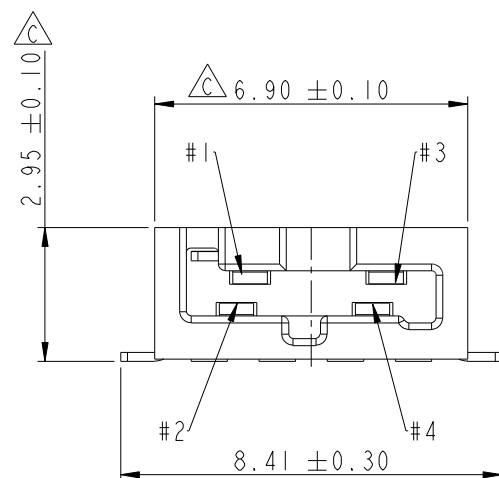
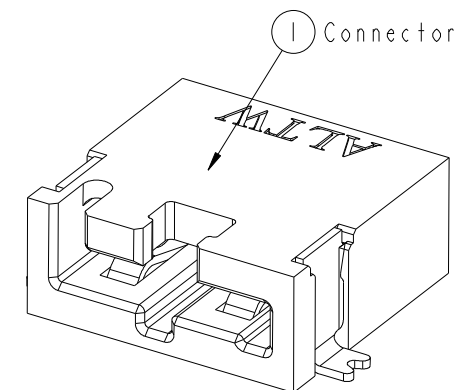
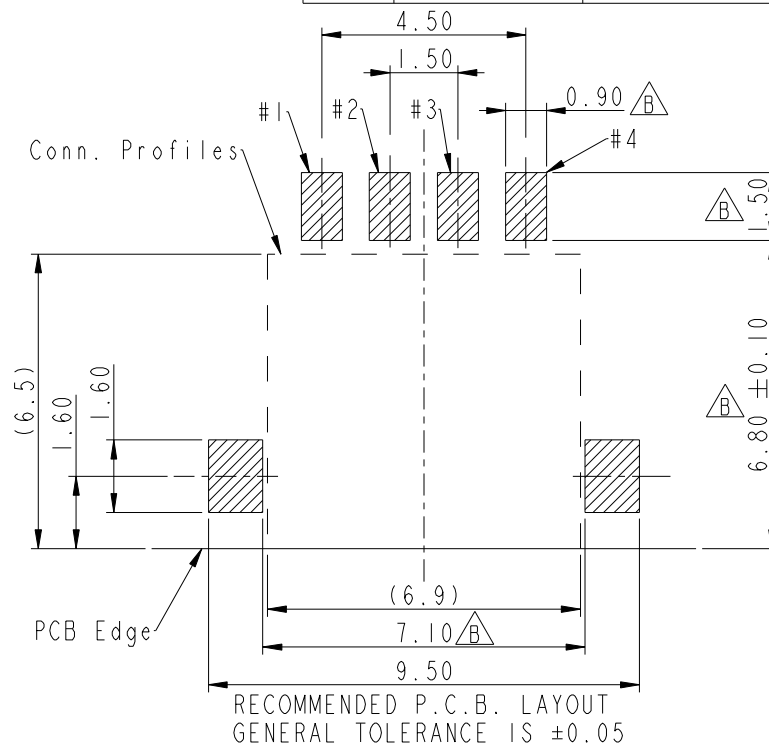


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LE313C0108	2013-12-16	Fisher	Change Plating and Package
D	CI91496	2019-08-29	NianPing Yu	Add UL Label
E	CI92063	2019-12-03	NianPing Yu	EXI

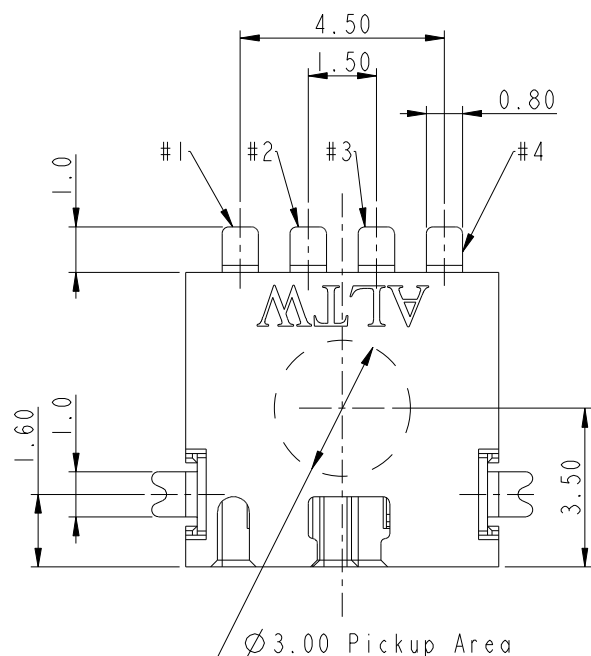

Notes:


- * Important Dimension To Check.
- * Housing: High temperature thermoplastic. UL94V-0, color is Natural white.
- * Terminal: Copper Alloy, Gold Plated on contact area. Tin plated on solder tails.
- * Solder Peg: Copper Alloy, Tin plated over Nickel.



UNIT: mm		TITLE	SSL-1.1 DC JACK CONNECTOR 4-POS. W/O POST, SMT TYPE
TOLERANCE		SCALE	6:1
.X	±0.25	SIZE	A4
.XX	±0.1	SHEET	1 OF 2
.XXX	±0.05	REV.	E
ANGLES	±1°	WC-REV.	C.3
			Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司


ITEM NO.	SSL11-J4D00-000001	DRAWN BY	NianPing Yu	DATE	2019-08-29
DWG. NO.	SSL11-J4D00-000001	CHECKED BY	Fisher Wang	DATE	2019-08-29
CUSTOMER	ALTW	APPROVED BY	Max Yang	DATE	2019-08-29

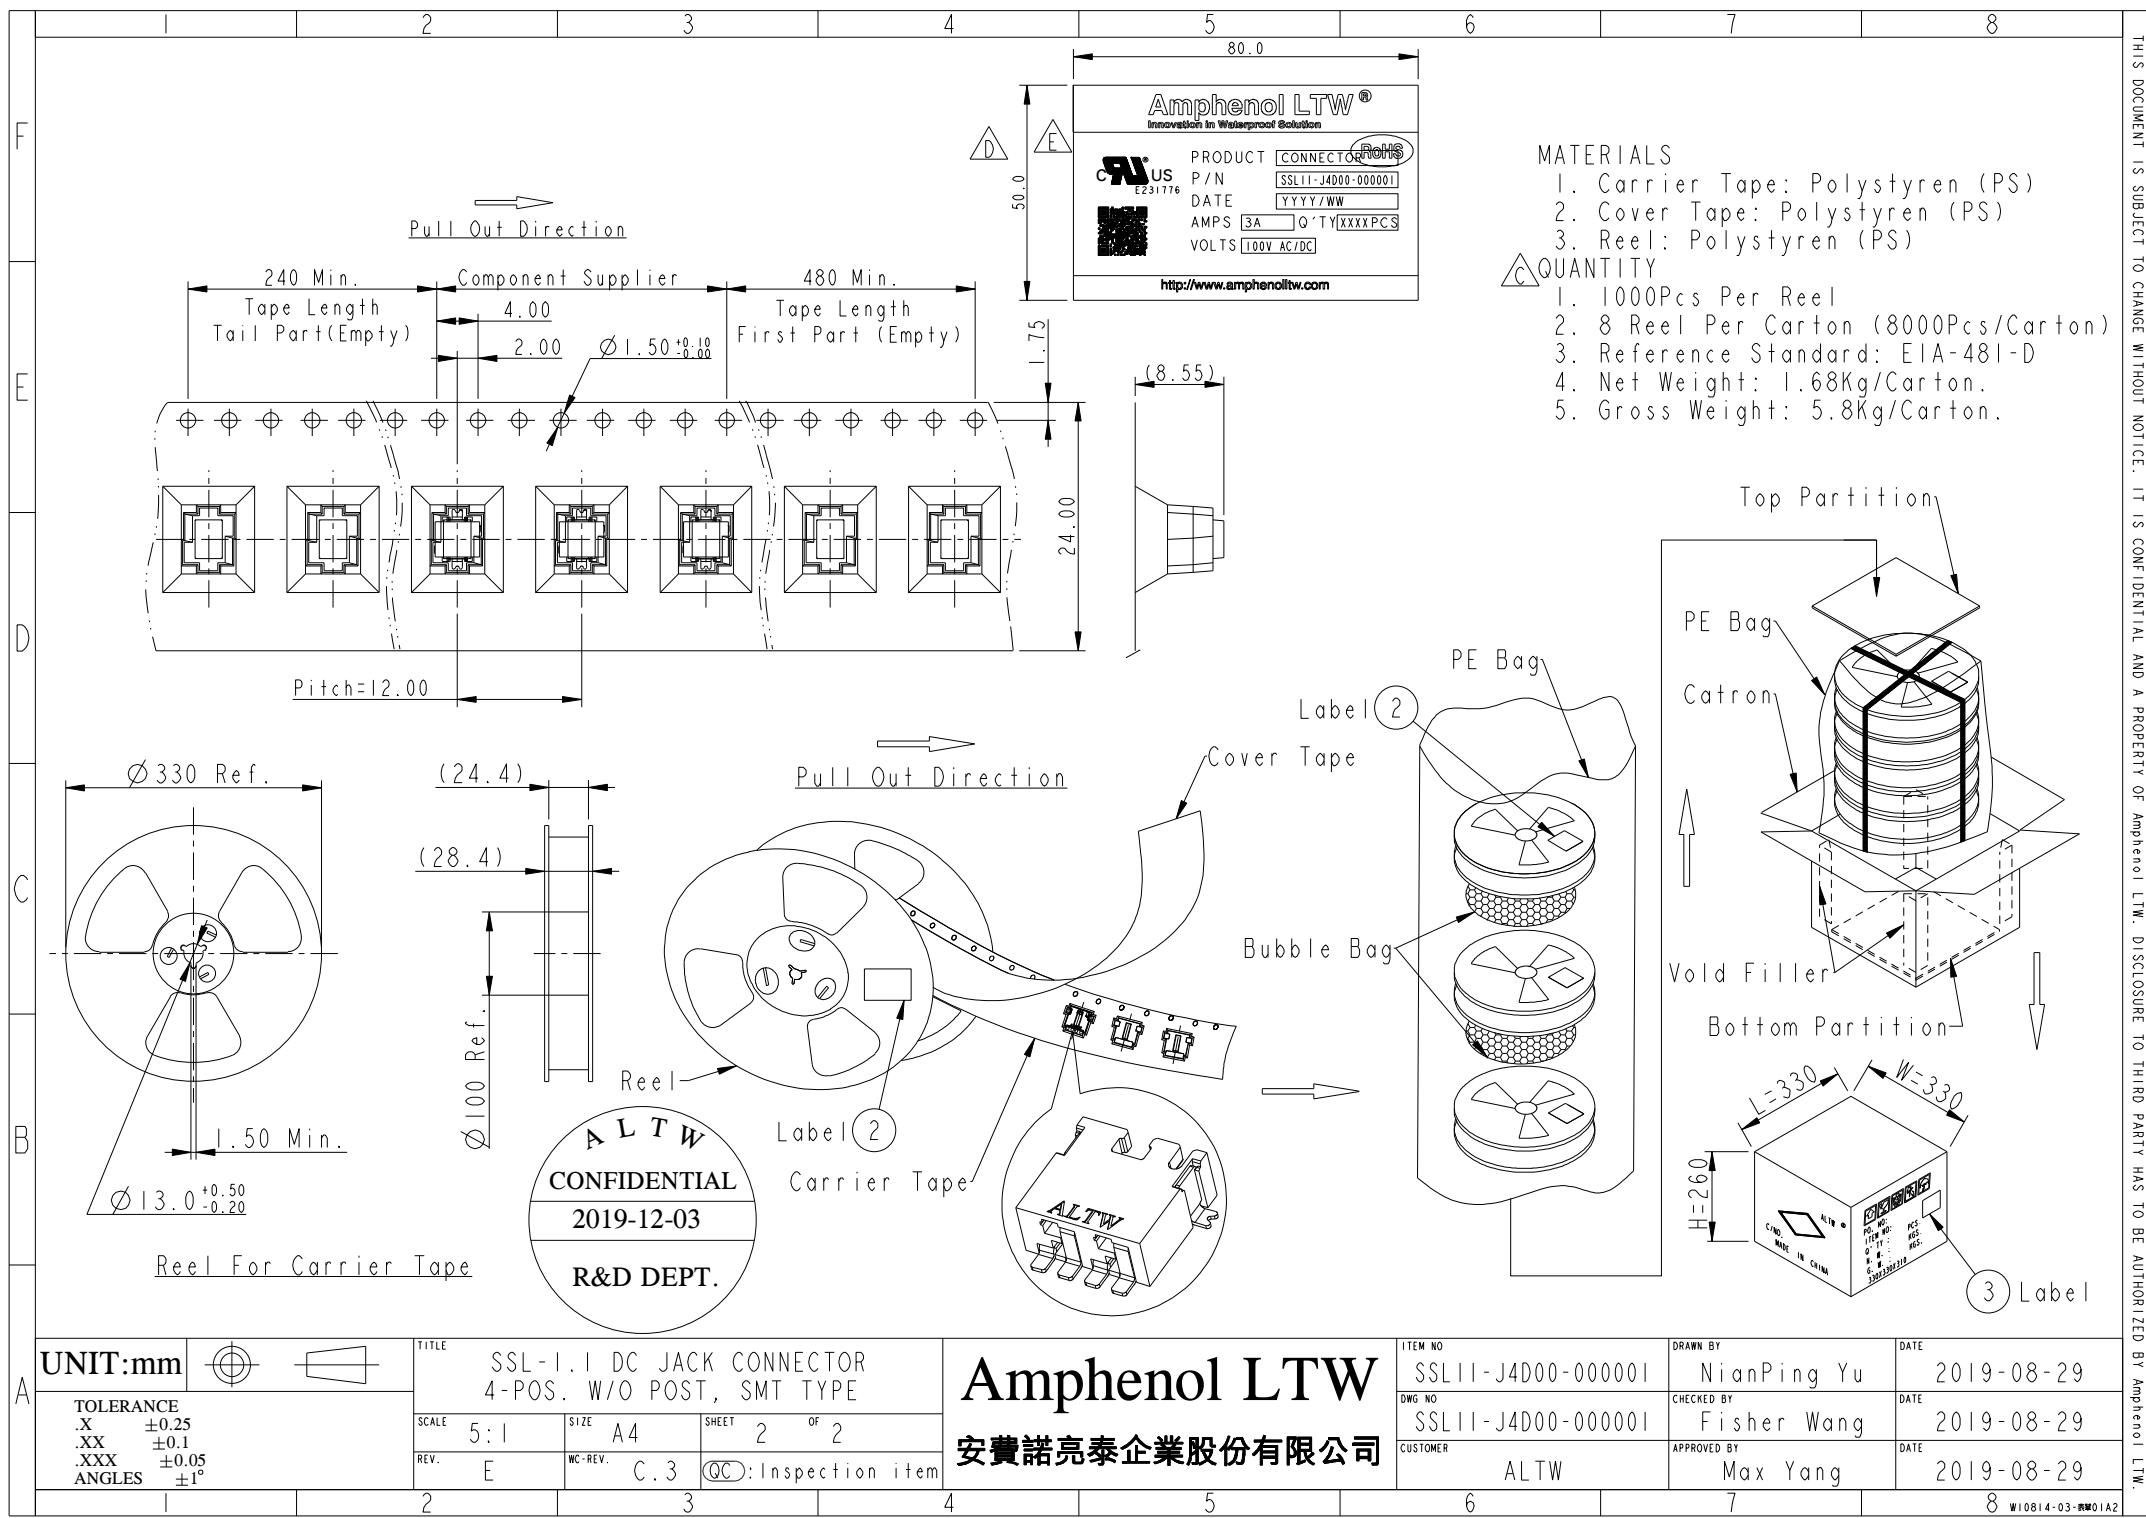

MATERIALS

- 1. Carrier Tape: Polystyren (PS)
 - 2. Cover Tape: Polystyren (PS)
 - 3. Reel: Polystyren (PS)
- QUANTITY
- 1. 1000Pcs Per Reel
 - 2. 8 Reel Per Carton (8000Pcs/Carton)
 - 3. Reference Standard: EIA-481-D
 - 4. Net Weight: 1.68Kg/Carton.
 - 5. Gross Weight: 5.8Kg/Carton.

UNIT:mm



TITLE SSL-1.1 DC JACK CONNECTOR 4-POS. W/O POST, SMT TYPE			
SCALE 5:1	SIZE A4	SHEET 2 OF 2	
REV. E	WC-REV. C.3	QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO SSL11-J4D00-000001	DRAWN BY NianPing Yu	DATE 2019-08-29
DWG NO SSL11-J4D00-000001	CHECKED BY Fisher Wang	DATE 2019-08-29
CUSTOMER ALTW	APPROVED BY Max Yang	DATE 2019-08-29

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.