

	1	2	3	4	5	6	7	8	
F					REV.	ECN NO.	DATE	SIGN	DESCRIPTION
					B	LEN1560330	2015-06-15	Fisher	Change the package
E					C	LEN1790240~41	2017-09-14	Ruru	RoHS Label and blue and white label merger
					D	C200559	2020-05-05	NianPing Yu	 xl
D									
C									
B									
A									

6.6

15.8

Pin1

Pin4

22.8

1.8

$\varnothing L \pm 5\%(\text{mm})$

ALTW

SSL12-J4LJ0-000000

WIRE

ALTW

CONFIDENTIAL

2020-05-05

R&D DEPT.

SSL12-J4LJ0-020AXX

01: L=100±20mm

02: L=200±20mm

04: L=400±25mm

Wire Length Range(L): 100~9900mm

20: 20AWG

UNIT:mm



TOLERANCE

±0.5mm

TITLE

SSL1.2 4P WIRE ASS'Y JACK TO OPEN

SCALE

1:1

SIZE

A4

SHEET

1

OF

2

REV.

D

WC-REV.

A.6

Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO

DWG NO

CUSTOMER

ALTW

DRAWN BY

Ruru

CHECKED BY

Rita

APPROVED BY

Max

DATE

2017-09-14

DATE

2017-09-14

DATE

2017-09-14

Notes:

*  Important Dimension To Check.

* Waterphoof Rate: IP68(mating)

IM Depth Of Water In 24 Hours.

* Housing: Thermoplastic, UL94V-0, Natural White.

* Terminal: Copper Alloy,Gold Plated on contact area.

* Seals: Silicone, Gray.

* Wire: UL1430 20AWG.

* Current Rating : 5A maximum.

* Voltage Rating: 250V DC/AC maximum.

* Operating Temperature: -40~+105°C.

1

2

3

4

5


6

7


8

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


PACKAGE

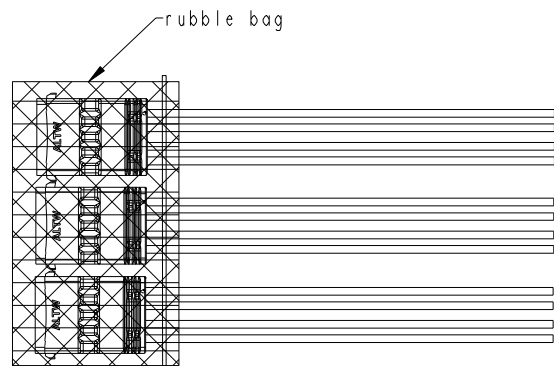



10pcs connector put on rubble bag, and with a cable ties.

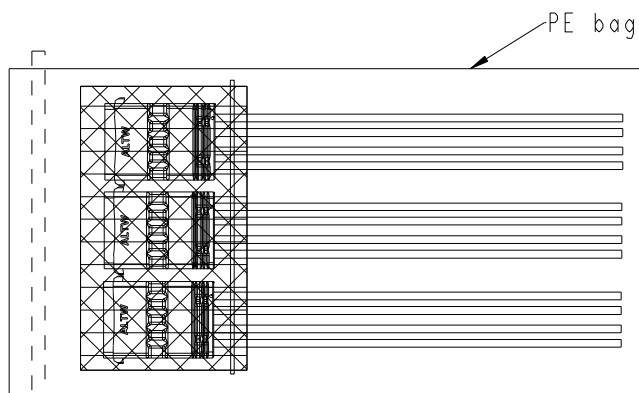

100 Pcs Cable into a PE Bag



Label print content

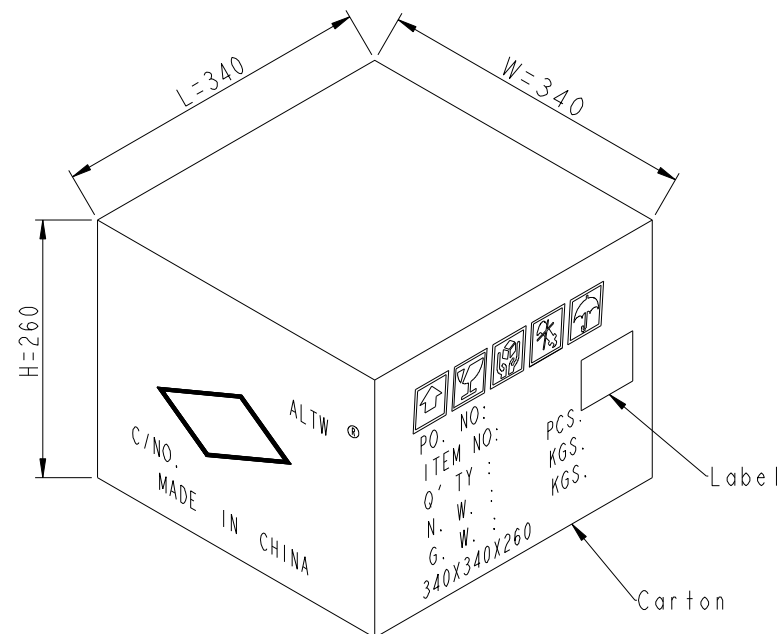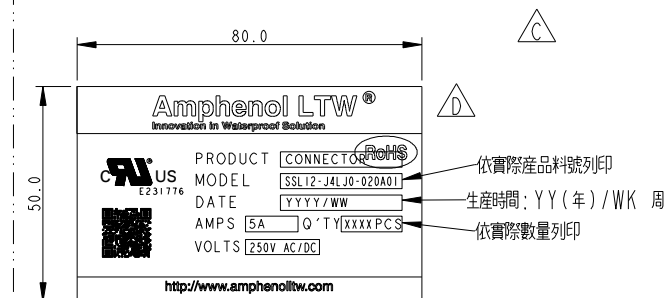

500pcs per Carton

UNIT:mm			TITLE	
	TOLERANCE		SSL1.2 4P WIRE ASS'Y PLUG TO OPEN	
	±0.5mm		SCALE	1:1
			SIZE	A4
REV.		WC-REV.	A.5	QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DWG. NO	CUSTOMER	DRAWN BY	CHECKED BY	APPROVED BY	DATE
	SSL12-J4LJ0-020AXX	ALTW	Ruru	Rita	Max	2017-09-14