

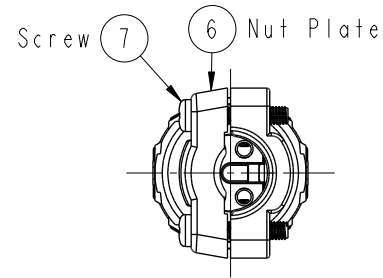
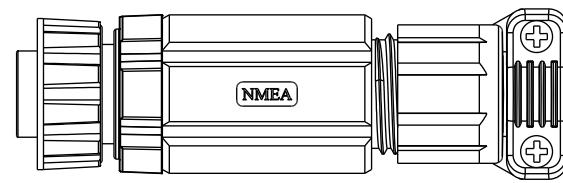

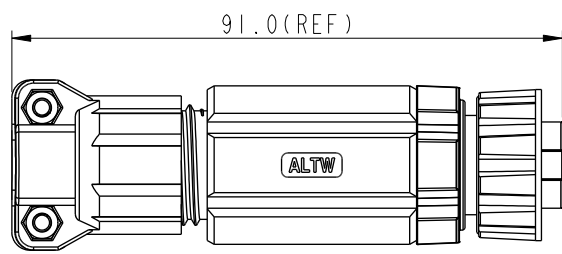
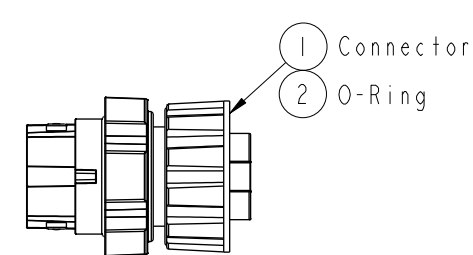
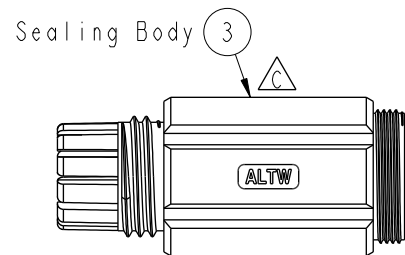



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1160060	2011/03/04	Doreen	Change Dimension View.
C	C221447	2022/09/15	Ruru	$\triangle C$ X4



Conn.
Pin Assignments
Front View

5	NET-L	Signal	Blue 藍	(18AWG)
4	NET-H	Signal	White 白	(18AWG)
3	NET-C	Power	Black 黑	(15AWG)
2	NET-S	Power	Red 紅	(15AWG)
1	Shield	Drain	Bare	(18AWG)
Conn.	Name	Pair	Wire Color For User	

Pin Out

- $\triangle C$ Note:
- * $\textcircled{CC}$ Important Dimension.
 - * Waterproof Rate : IP67
 - * Connector: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * O-Ring 1: Rubber, Gray.
 - * O-Ring 2: Rubber, Gray.
 - * Holder: Thermoplastic, Black.
 - * Gasket: Rubber, Black.
 - * Sealing Nut: Thermoplastic, Black.
 - * Nut: Metal.
 - * Seals For Cable OD $\varnothing 8\text{mm} \sim \varnothing 12.2\text{mm}$
 - * 使用温度: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$

UNIT:mm		TOLERANCE		TITLE		ITEM NO		DRAWN BY		DATE	
.X		± 0.25		NMEA, MN 8A(APP), 05P		UMN-05BFFB-SL7001		Doreen		2011/03/04	
.XX		± 0.1		CABLE W/O SR, F, F, FI SCREW IN		DWG NO		CHECKED BY		DATE	
.XXX		± 0.05		SCALE		UMN-05BFFB-SL7001		Winnie		2011/03/04	
ANGLES		$\pm 1^{\circ}$		REV.		CUSTOMER		APPROVED BY		DATE	
				C		ALTW		Kevin		2011/03/04	
				WC-REV.							
				A.1							
				$\textcircled{CC}$: Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司