

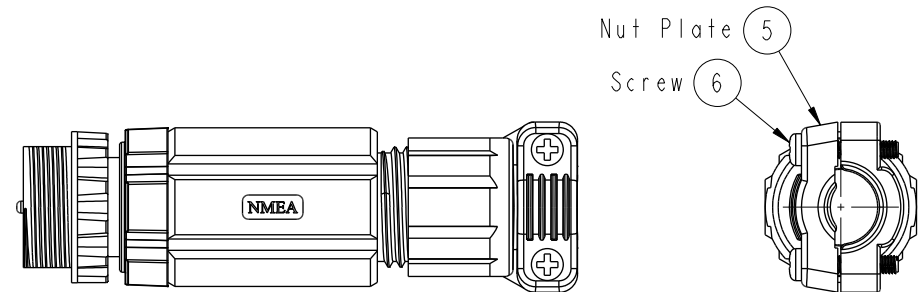
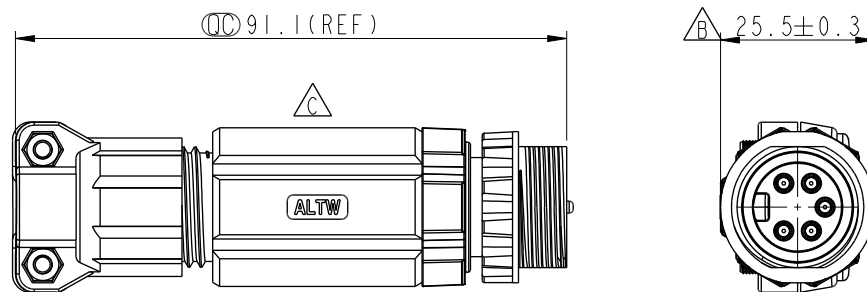


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1160059	2011/03/04	Doreen	Change Dimension View.
C	C221447	2022/09/15	Ruru	 X4

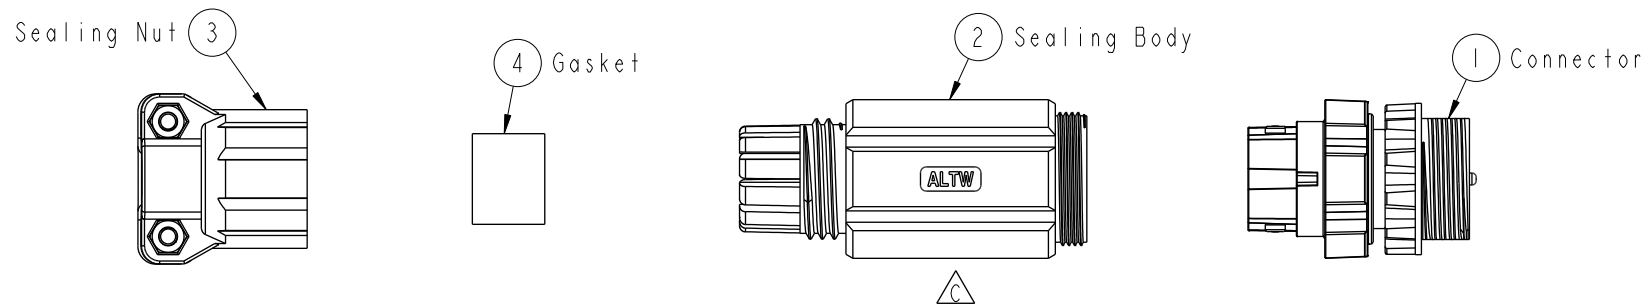

5	NET-L	Signal	Blue 藍 (18AWG)
4	NET-H	Signal	White 白 (18AWG)
3	NET-C	Power	Black 黑 (15AWG)
2	NET-S	Power	Red 紅 (15AWG)
1	Shield	Drain	Bare (18AWG)
Conn.	Name	Pair	Wire Color For User

Conn.
Pin Assignments
Front View

Pin Out

 Note:

- *  Important Dimension.
- * Waterproof Rate : IP67
- * Connector: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * O-Ring: Rubber, Gray.
- * Holder: Thermoplastic, Black.
- * Gasket: Rubber, Black.
- * Sealing Nut: Thermoplastic, Black.
- * Nut: Metal.
- * Seals For Cable OD $\varnothing 8\text{mm} \sim \varnothing 12.2\text{mm}$
- * 使用温度: -20°C ~ 70°C

UNIT : mm		 	TITLE NMEA, MN 8A(APP), 05P CABLE W/O SR, M, M, FI SCREW IN					Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO UMN-05BMMB-SL7001		DRAWN BY Dorren		DATE 2011/03/04	
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±		SCALE 1:2		SIZE A4		SHEET 1 OF 1				DWG NO UMN-05BMMB-SL7001		CHECKED BY Winnie		DATE 2011/03/04	
		REV. C		WC-REV. A.2		QC: Inspection item				CUSTOMER ALTW		APPROVED BY Kevin		DATE 2011/03/04	