

3108NL (80[□] x 20^L)



NMB-MAT

EMINEBEA.COM

General Specifications

Motor Protection:

Auto Restart/Polarity Protection

Insulation Resistance: 10M Ω or over with a DC500V Megger

Dielectric Withstand Voltage: AC 700V 1s

Allowable Ambient Temperature Range:


-10°C ~ +70°C (Operating)

-40°C ~ +70°C (Storage)


(non-condensing environment)

Outline


Units: $\frac{\text{inch}}{\text{mm}}$

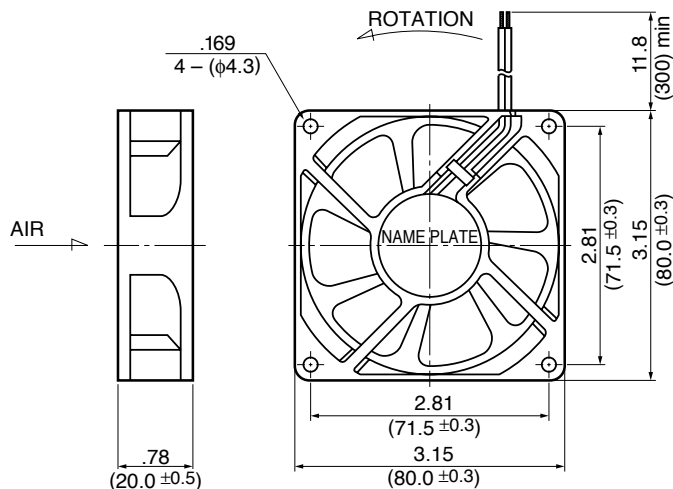

Characteristic Curves

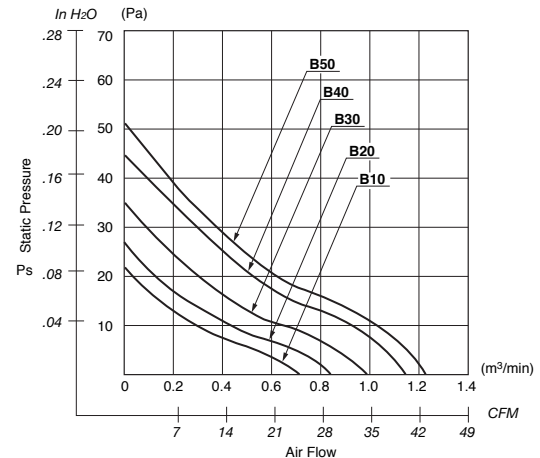

Panel Cut-outs

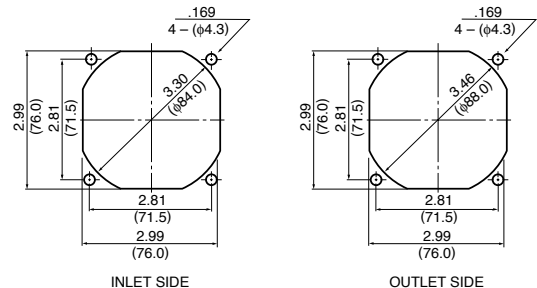

Material

Casing : Plastic (Black) 94V-0

Impeller : Plastic (Black) 94V-0

Bearing : Ball Bearing

Lead Wire: UL1007, AWG24, +Red, -Black

Specifications

MODEL	Product No.	Rated Voltage	Operating Voltage	Current	Input Power	Speed	Max. Air Flow		Max. Static Pressure		Noise	Mass
		(V)	(V)	(A)*1	(W)*1	(min ⁻¹)*1	CFM*1	(m³/min)*1	in H ₂ O	(Pa)*1	(dB)*1	(g)
3108NL-04W-B10-	X00	12	6.0 ~ 13.8	0.09	1.08	2350	26.5	0.75	.08	21.0	26.0	85
3108NL-04W-B20-	X00	12	6.0 ~ 13.8	0.11	1.32	2600	29.6	0.84	.10	26.0	29.0	85
3108NL-04W-B30-	X00	12	6.0 ~ 13.8	0.14	1.68	2950	34.6	0.98	.13	33.5	32.5	85
3108NL-04W-B40-	X00	12	6.0 ~ 13.8	0.20	2.40	3350	40.6	1.15	.17	43.7	38.5	85
3108NL-04W-B50-	X00	12	6.0 ~ 13.8	0.28	3.36	3750	44.0	1.25	.20	50.1	42.0	85
3108NL-05W-B10-	X00	24	15.0 ~ 27.6	0.05	1.30	2350	26.5	0.75	.08	21.0	26.0	85
3108NL-05W-B20-	X00	24	15.0 ~ 27.6	0.06	1.44	2600	29.6	0.84	.10	26.0	29.0	85
3108NL-05W-B30-	X00	24	15.0 ~ 27.6	0.07	1.68	2950	34.6	0.98	.13	33.5	32.5	85
3108NL-05W-B40-	X00	24	15.0 ~ 27.6	0.11	2.64	3350	40.6	1.15	.17	43.7	38.5	85
3108NL-05W-B50-	X00	24	15.0 ~ 27.6	0.15	3.60	3750	44.0	1.25	.20	50.1	42.0	85

Rotation: Counterclockwise

Airflow Outlet: Air Out Over Struts

*1: Average Values in Free Air

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NMB Technologies:

<u>3108NL-04W-B19-L00</u>	<u>3108NL-04W-B29-P50</u>	<u>3108NL-04W-B39-L50</u>	<u>3108NL-04W-B40-P00</u>	<u>3108NL-05W-B19-L00</u>
<u>3108NL-05W-B59-L00</u>	<u>3108NL-04W-B59-L50</u>	<u>3108NL-04W-B10-P00</u>	<u>3108NL-04W-B30-P00</u>	<u>3108NL-05W-B59-P00</u>
<u>3108NL-05W-B49-L00</u>	<u>3108NL-05W-B50-P00</u>	<u>3108NL-04W-B59-P00</u>	<u>3108NL-04W-B10-L00</u>	<u>3108NL-05W-B20-P00</u>
<u>3108NL-04W-B20-L00</u>	<u>3108NL-04W-B49-P50</u>	<u>3108NL-04W-B50-P00</u>	<u>3108NL-05W-B10-P00</u>	<u>3108NL-05W-B29-L00</u>
<u>3108NL-04W-B59-L00</u>	<u>3108NL-04W-B19-L50</u>	<u>3108NL-05W-B40-L00</u>	<u>3108NL-04W-B19-P00</u>	<u>3108NL-04W-B50-L00</u>
<u>3108NL-05W-B39-P50</u>	<u>3108NL-05W-B20-L00</u>	<u>3108NL-04W-B29-L50</u>	<u>3108NL-04W-B20-P00</u>	<u>3108NL-04W-B39-P00</u>
<u>3108NL-05W-B30-L00</u>	<u>3108NL-04W-B30-L00</u>	<u>3108NL-05W-B30-P00</u>	<u>3108NL-04W-B39-L00</u>	<u>3108NL-04W-B29-L00</u>
<u>3108NL-05W-B49-P00</u>	<u>3108NL-04W-B40-L00</u>	<u>3108NL-05W-B39-P00</u>	<u>3108NL-05W-B19-P00</u>	<u>3108NL-05W-B29-P00</u>
<u>3108NL-04W-B49-L00</u>	<u>3108NL-05W-B10-L00</u>	<u>3108NL-04W-B59-P50</u>	<u>3108NL-05W-B50-L00</u>	<u>3108NL-04W-B49-P00</u>
<u>3108NL-05W-B39-L00</u>	<u>3108NL-05W-B40-P00</u>	<u>3108NL-04W-B29-P00</u>	<u>08020KA-24L-EL-00</u>	<u>08020KA-12N-ET-00</u>
<u>08020KA-12K-EA-00</u>	<u>08020KA-12K-AA-00</u>	<u>08020KA-24J-AA-00</u>	<u>08020KA-12J-AA-00</u>	<u>08020KA-24N-EA-00</u>
<u>08020KA-12N-AT-00</u>	<u>08020KA-12K-ET-00</u>	<u>08020KA-24L-ET-00</u>	<u>08020KA-12M-ET-00</u>	<u>08020KA-24K-AA-00</u>
<u>08020KA-12K-EL-00</u>	<u>08020KA-12L-EA-00</u>	<u>08020KA-12N-EA-00</u>	<u>08020KA-12N-EL-00</u>	<u>08020KA-12K-AT-00</u>
<u>08020KA-24N-AA-00</u>	<u>08020KA-12J-AL-00</u>	<u>08020KA-24J-EL-00</u>	<u>08020KA-24J-EA-00</u>	<u>08020KA-12M-AA-00</u>
<u>08020KA-24K-EA-00</u>	<u>08020KA-12L-AA-00</u>	<u>08020KA-24L-AL-00</u>	<u>08020KA-12M-AL-00</u>	<u>08020KA-24K-AL-00</u>
<u>08020KA-24K-EL-00</u>	<u>08020KA-12J-EA-00</u>	<u>08020KA-24L-EA-00</u>	<u>08020KA-24M-AL-00</u>	<u>08020KA-12L-EL-00</u>
<u>08020KA-12M-EL-00</u>	<u>08020KA-12N-AL-00</u>	<u>08020KA-24N-EL-00</u>	<u>08020KA-24J-AL-00</u>	<u>08020KA-12K-AL-00</u>
<u>08020KA-24M-AA-00</u>	<u>08020KA-12L-AL-00</u>	<u>08020KA-24L-AA-00</u>	<u>08020KA-12M-EA-00</u>	<u>08020KA-12J-AT-00</u>
<u>08020KA-24M-EL-00</u>	<u>08020KA-12J-EL-00</u>	<u>08020KA-24M-EA-00</u>	<u>08020KA-24N-AL-00</u>	<u>08020KA-12L-AT-00</u>
<u>08020KA-12N-AA-00</u>				