



Connectors > RF Connectors > Coax Connectors



RF Interface: **BNC**
RF Connector Style: **Jack**
RF Connector Mated Outer Diameter (Approximate): **14.53 mm [.572 in]**
Impedance: **50 Ω**
Compatible With RF Cable Type: **RG 58, RG 58A, RG 58B, RG 58C**

Features

Product Type Features

Connector Shape	Circular
RF Interface	BNC
RF Connector Style	Jack
Compatible With RF Cable Type	RG 58, RG 58A, RG 58B, RG 58C
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	1
Number of Coaxial Contacts	1

Electrical Characteristics

Impedance	50 Ω
-----------	------

Body Features

Cable Connector Orientation	Straight
Body Material	Brass
Body Material Finish	Plated
Body Plating Material	Silver

Contact Features

RF Connector Center Contact Underplating Material	Nickel
---	--------



Crimp Type	Dual
RF Connector Center Contact Plating Material	Gold
RF Connector Center Contact Material	Beryllium Copper

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

RF Connector Coupling Mechanism	Bayonet
RF Contact Captivation Method	Mechanical

Dimensions

RF Connector Mated Outer Diameter (Approximate)	14.53 mm[.572 in]
---	-------------------

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-65 – 165 °C[-85 – 329 °F]

Operation/Application

Operating Frequency	4 GHz
---------------------	-------

Packaging Features

Packaging Method	Carton
------------------	--------

Other

Coupling Nut Base Material	Brass
Grade	Military
Dielectric Material	PTFE

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Pb (3.7% in Component Part) <small>Article Safe Usage Statements:</small>



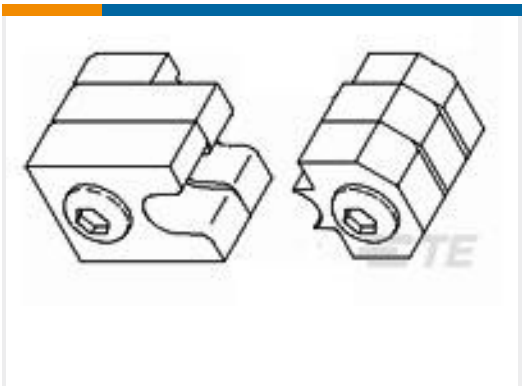
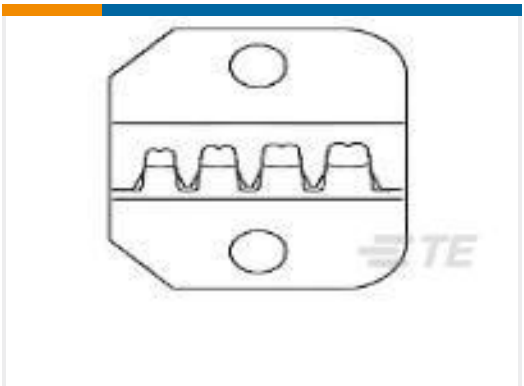


Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

			
TE Part # 69727 ECON BNC COAX RG55 DIE SET	TE Part # 220189-3 BNC CRIMPING DIE FOR COMM TOOL	TE Part # 69478-1 DAHT COAXICON RF RG55B ASSY	TE Part # 69726 ECON BNC COAX RG142B DIE SET

Also in the Series | BNC



Coax Connectors(8)

Customers Also Bought



TE Part #796859-3
3 POS TERMI-BLOK PLUG RT ANGLE



TE Part #330620
INSUL BUSHING BNC BLKHD PHEN



TE Part #YDTS26W17-35SCV001
PLUG ASSY



TE Part #2-331350-1
BNC PLUG, PTFE



TE Part #2-331350-9
BNC PLUG



TE Part #1-1337434-0
BNC RM BHJ Hex 50Ohm Silver Pltd RG58C/U



TE Part #1490406-1
HYP10 TERMINYL 2AWG DIE SET



TE Part #ZPF000000000036891
983-6SE 10-05 S9 L



TE Part #1825068-7
C22904 CAP WHITE .39 DIA.



TE Part #980679-000
55PC1821-20-2/6-3CS2433

Documents

CAD Files

Customer View Model

ENG_CVM_CVM_2-331351-1_AA.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-331351-1_AA.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-331351-1_AA.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

Product Specification

English

Plug, Coaxial, Commercial BNC

English



Instruction Sheets

50-Ohm RF Series BNC Jack Connectors (Standard Dual Crimp Type) 225396-() and 331351-()

English

Instruction Sheet (U.S.)

English