


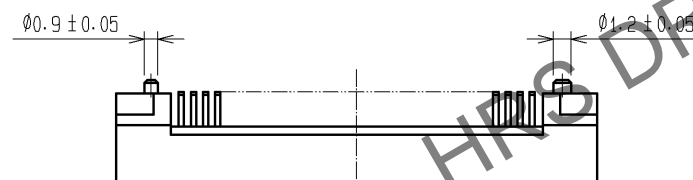



Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

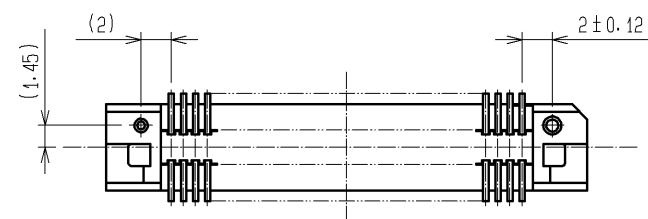

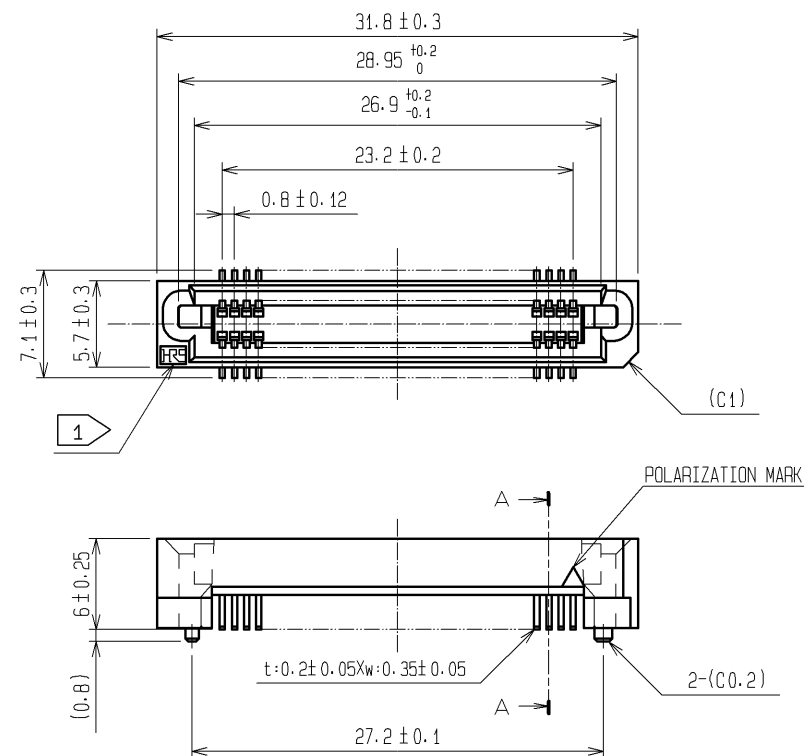




RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)
(RECOMMENDED METAL MASK THICKNESS: 0.15mm)

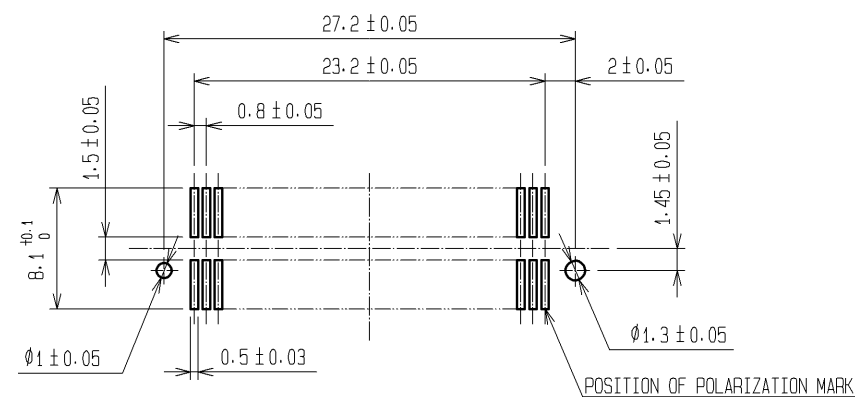

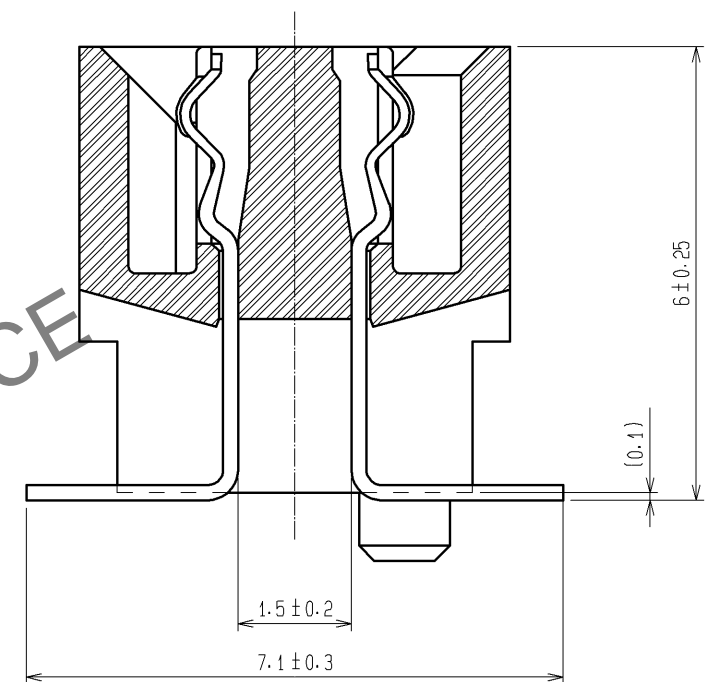A-A (10:1)





- NOTE
- 1 HRS MARK SHALL BE OPTIONAL.
 - 2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 - 3 TUBE PACKAGING SHALL BE APPLIED FOR THIS PRODUCT. SEE NEXT PAGE FOR DETAILS.
 - 4 THIS PRODUCT HAS TAPE FOR VACUUM PICKUP. SEE NEXT PAGE FOR DETAIL OF STICKING POSITION, ETC.
 - 5 FOR MODIFICATION, ETC, PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
 - 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.


2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.							
		LEAD AREA:TIN-PLATING 1μm min.							
		UNDER PLATING:NICKEL 2μm min.							
1	PPS	LIGHT BROWN (UL94V-0)	5	POLYIMIDE	(TAPE FOR VUCUUM PICKUP)				
			4	PVC	(STOPPER)				
			3	PVC	(TUBE)				
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS				
UNITS mm			SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		08. 07. 23		DRAWING NO. EDC3-084982-21			
		CHECED : HT. YAMAGUCHI		08. 07. 23		PART NO. FX6-60S-0. 8SV2(91)			
		DESIGNED : SY. KAMIGA		08. 07. 22		CODE NO. CL576-0125-6-91			
		DRAWN : HK. SUNADORI		08. 07. 18					
									

Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

DRAWING FOR PACKING(FREE)

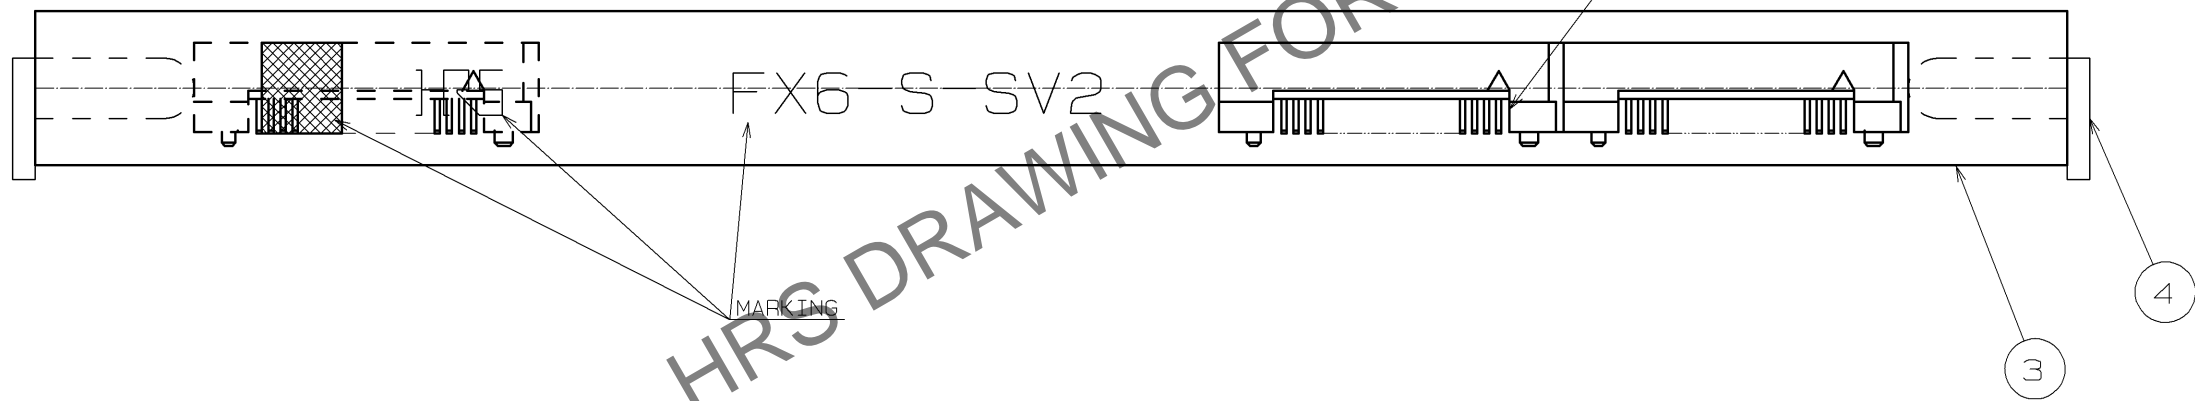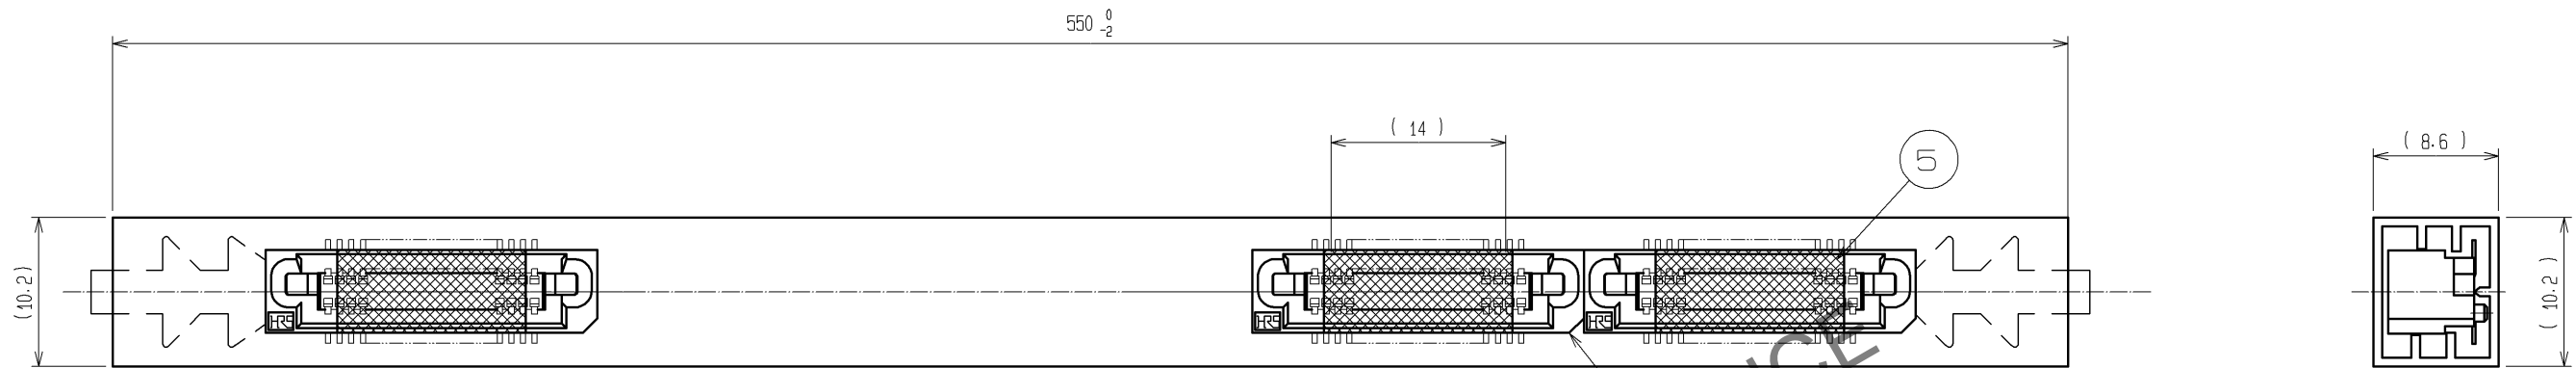

DETAIL FOR TAPE FOR VACUUM PICK-UP(5:1)

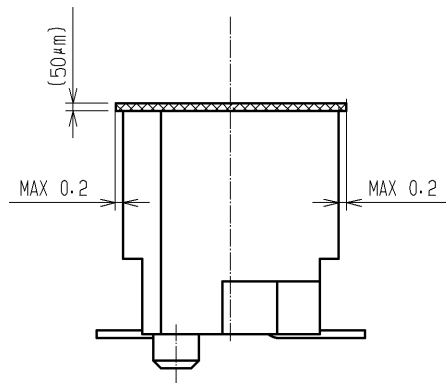

- NOTE 1 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
2 ONE TUBE CONSISTS OF 16 PIECES.
3 REMOVE THE VACUUM PICK-UP TAPE AFTER MOUNTING THE CONNECTOR.

HRS

DRAWING NO.	EDC3-084982-21
PART NO.	FX6-60S-0.8SV2(91)
CODE NO.	CL576-0125-6-91

2/2