


RP8300 SERIES PUSHBUTTON SWITCH

ANTI-VANDAL SWITCHES
DETECTOR SWITCHES
DIP SWITCHES
KEYLOCK SWITCHES
NAVIGATION SWITCHES
PUSHBUTTON SWITCHES
ROCKER SWITCHES
ROTARY SWITCHES
SLIDE SWITCHES
SNAP ACTION SWITCHES
TACTILE SWITCHES
TOGGLE SWITCHES
CAP OPTIONS



APPLICATIONS / MARKETS



Audio / Visual




Electrical Housewares



Floor Care Appliances



White Goods



Instrumentation



Medical Equipment

RoHS

SPECIFICATIONS

Electrical Rating:

500mA @ 48 VAC, 200mA @ 50 VDC, 200mA @ 250 VAC

Life Expectancy: 500,000 Cycles

Contact Resistance: 50mΩ Max.

Insulation Resistance: 1,000MΩ Min. @ 500VDC

Dielectric Strength: 1,500VAC for 1 minute

Operating Temperature: -30°C to 85°C

Travel: 1.5mm

Contact Arrangement: SPST, Off-(On), Momentary

Actuation Force: 350 gf

Panel Thickness: 1.5mm - 4.0mm

Ingress Protection: IP67

Mounting Nut Torque: 1.5Nm

FEATURES & BENEFITS

- Threaded mount
- 500,000 life expectancy
- LED illumination options
- Sealed to IP67 ratings
- Metal Diecast housing

PART NUMBER CONFIGURATOR

Series



RP8300
RP8301*

Bushing



B2 - Threaded
(12 x 0.75)

Termination



M1 - Standard

Contact Material



C - Gold Over
Silver

Seal



E - Epoxy
Sealed

Housing Color



BLK - Black*
NIC - Stain Nickel
CHR - Chrome

Cap Color



WHT - White
BLK - Black
RED - Red
ORG - Orange
YEL - Yellow
GRN - Green
BLU - Blue

LED Color



WHT - White LED
RED - Red LED
YEL - Yellow LED
GRN - Green LED
BLU - Blue LED
GY - Green/Yellow LED
RG - Red/Green LED
RB - Red/Blue LED
NIL - Non Illuminated*

*The RP8201 series (High Actuator) is only offered with a black housing color and is non-illuminated.

Specifications subject to change without notice 7.10.2024



E-SWITCH®




www.e-switch.com

800.867.2717




1

RP8300 SERIES PUSHBUTTON SWITCH

RP8300 w/ LED B2 BUSHING

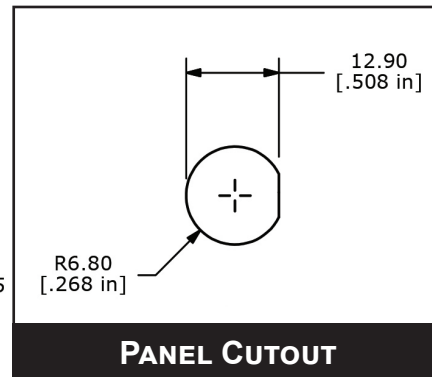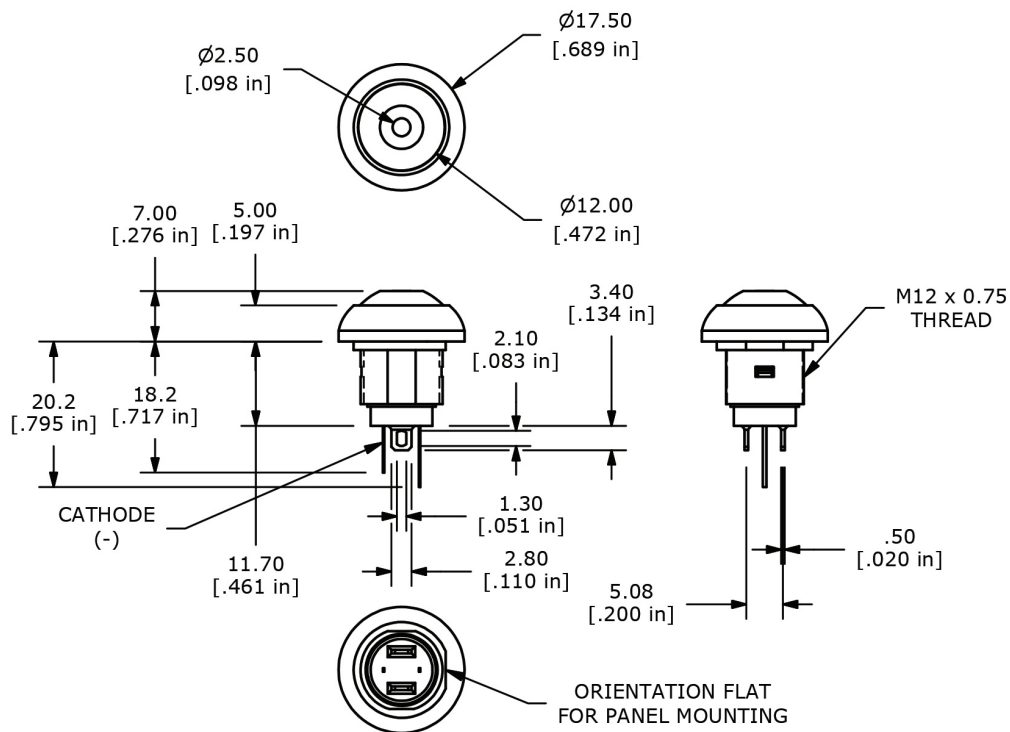

RP8300 w/o LED B2 BUSHING

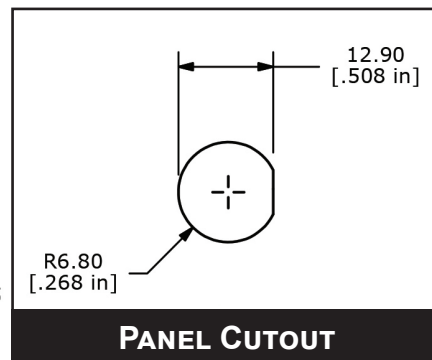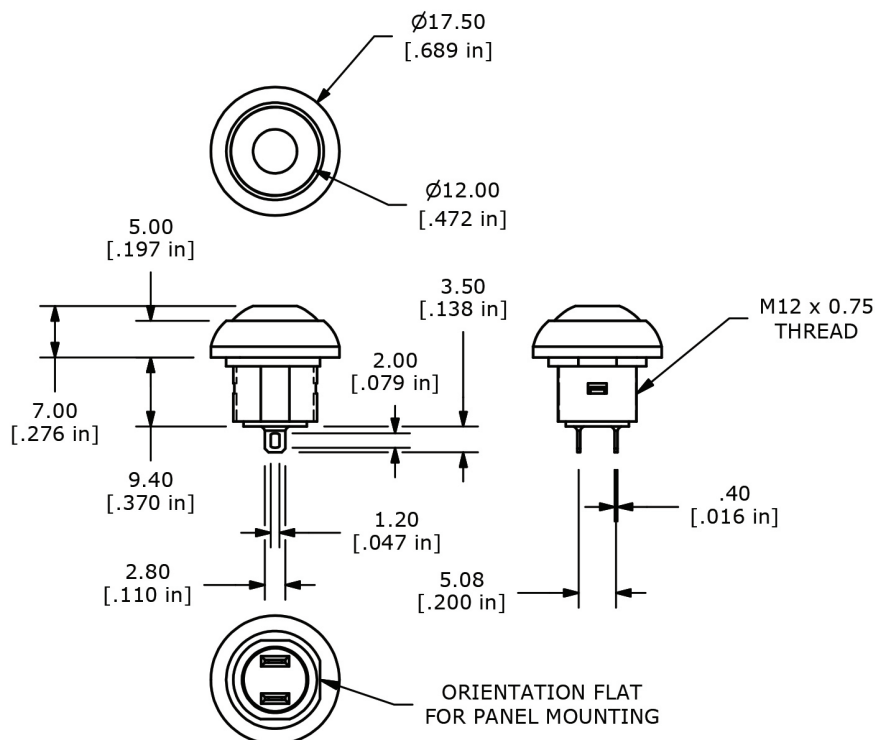

E-SWITCH®

www.e-switch.com




800.867.2717

2

ANTI-VANDAL SWITCHES
DETECTOR SWITCHES
DIP SWITCHES
KEYLOCK SWITCHES
NAVIGATION SWITCHES
PUSHBUTTON SWITCHES
ROCKER SWITCHES
ROTARY SWITCHES
SLIDE SWITCHES
SNAP ACTION SWITCHES
TACTILE SWITCHES
TOGGLE SWITCHES
CAP OPTIONS

RP8300 SERIES PUSHBUTTON SWITCH

RP8301 w/o LED B2 BUSHING

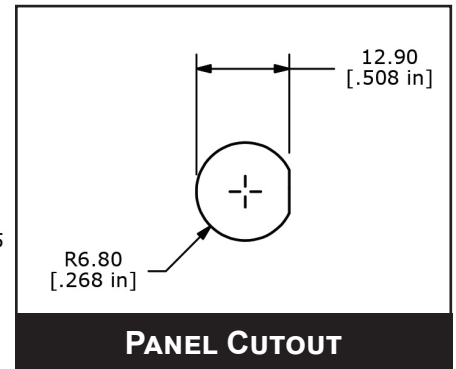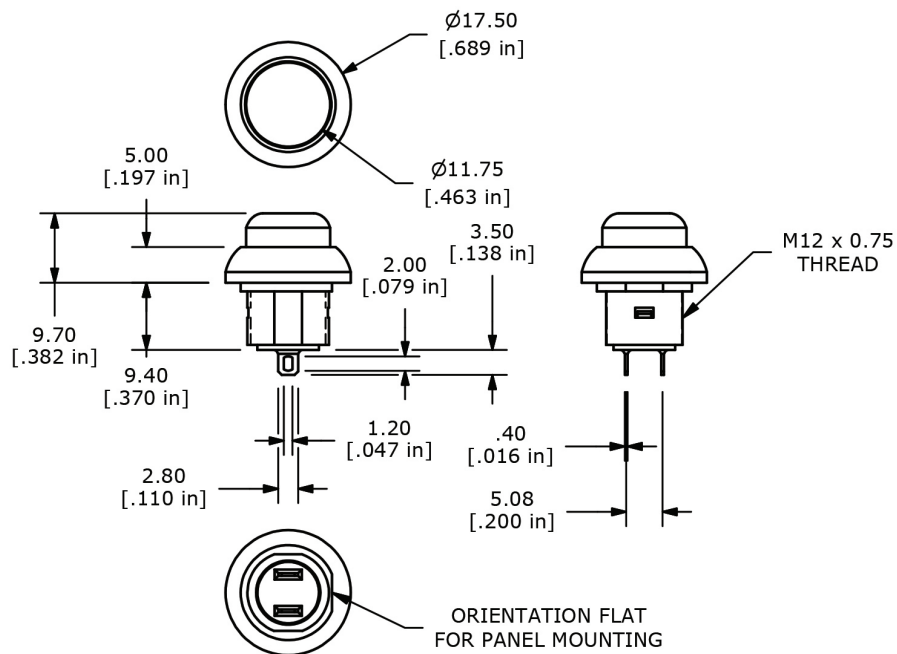

E-SWITCH®

www.e-switch.com

800.867.2717

3