




EMI & EMC Solutions > EMI Filters > Power Line Filters > Single Phase Filters > Single Phase Filters, Corcom T Series

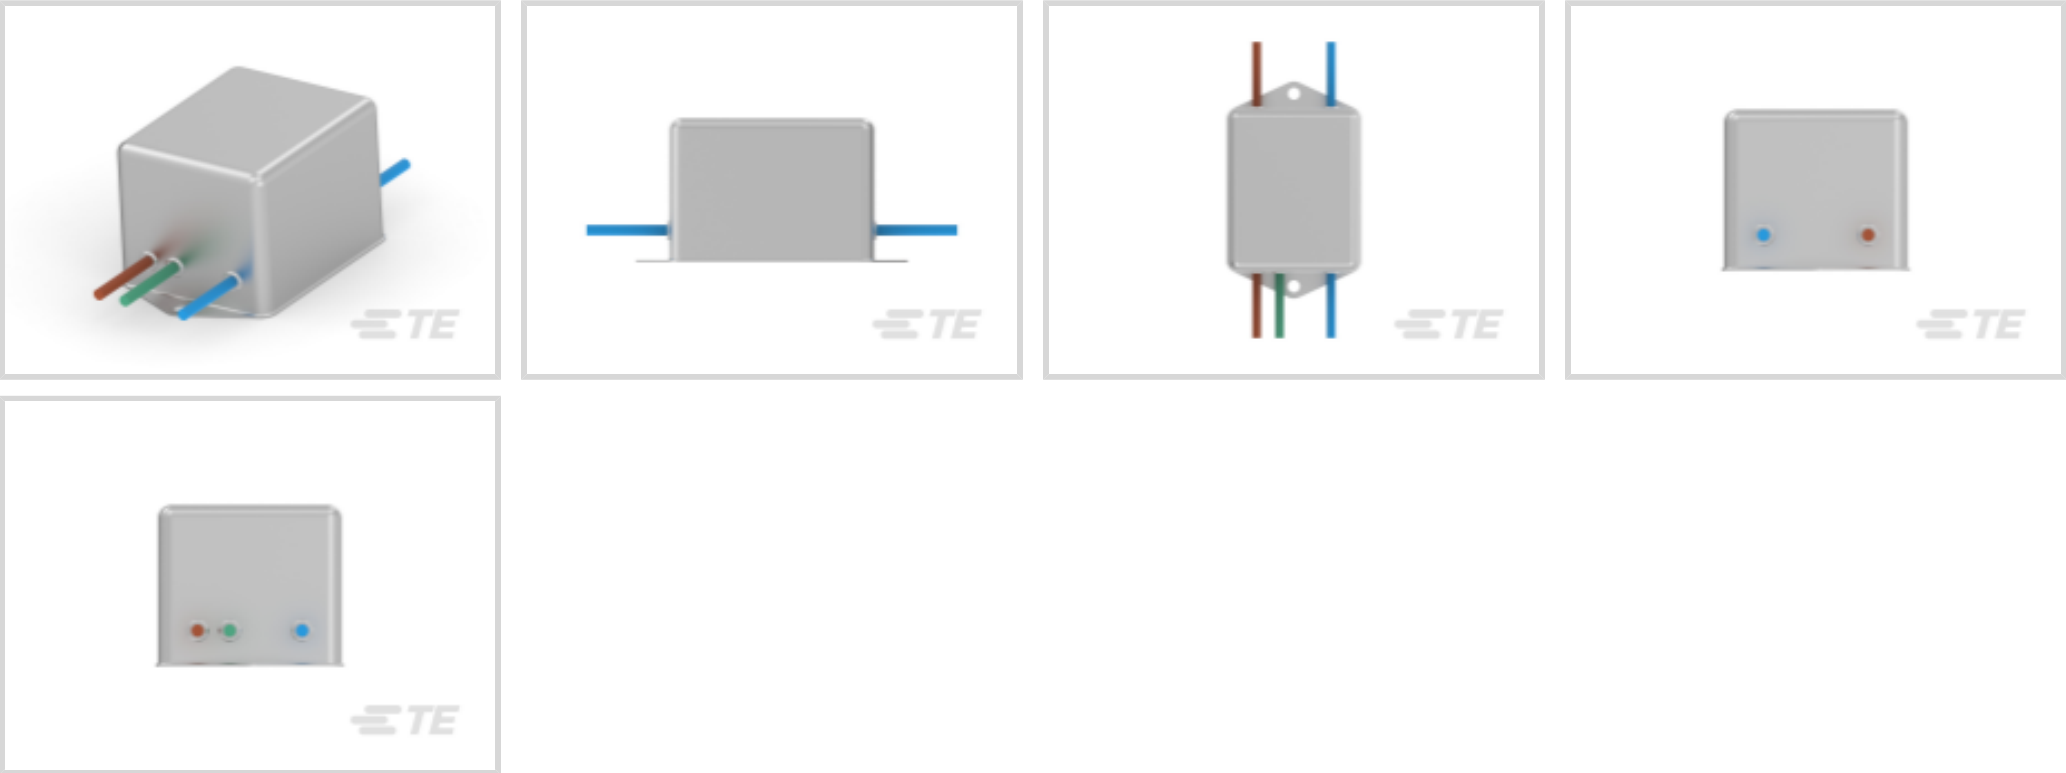

Current Rating: 3 A

Input Termination Type: Wire Lead

Output Termination Type: Wire Lead

Leakage Current (Max) (120VAC, 60Hz): .3 mA

Leakage Current (Max) (250VAC, 50Hz): .5 mA

[All Single Phase Filters, Corcom T Series \(18\)](#)

Features

Product Type Features

Ground Choke Option	No
Filtering Requirements	Filtered
Input Termination Type	Wire Lead
Output Termination Type	Wire Lead

Electrical Characteristics

Operating Voltage	250 VAC
Current Rating	3 A
Leakage Current (Max) (120VAC, 60Hz)	.3 mA
Leakage Current (Max) (250VAC, 50Hz)	.5 mA

Mechanical Attachment

Panel Mount Feature Type	Flanged
--------------------------	---------

Usage Conditions

Operating Temperature Range	-10 – 40 °C
-----------------------------	-------------



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # CAT-C8114-T1
Single Phase Filters, Corcom T Series

Also in the Series | Corcom T




Single Phase Filters(18)


Customers Also Bought

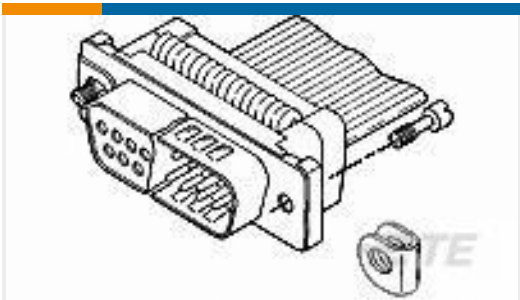

TE Part #5746881-1
MALE SCREW RETAINER KIT

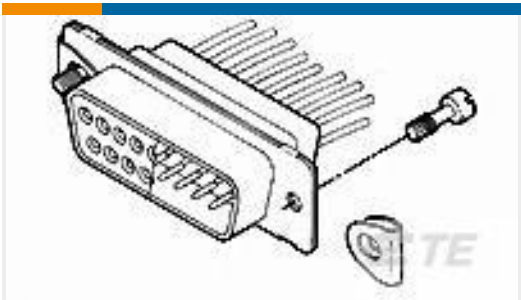

TE Part #5205980-4
SCREW RETAINER KIT

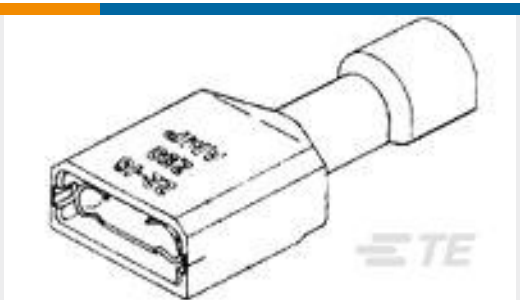

TE Part #3-350820-2
ULTRAFast 250 ASSY REC 16-14
TPBR LP



TE Part #0641-3-1231L
CONT PIN



TE Part #0660-206-1282
CONT PIN



TE Part #532956-1
12 MODII 2PC CE RCPT ASSY



TE Part #63951-4
250 FASTON TAB TPBR



TE Part #208010-2
50 PLUG SP/AP STD



TE Part #38941-12L
CONT PIN

Documents

Product Drawings

3ET3=F7310 S0

English

CAD Files

Customer View Model

ENG_CVM_CVM_6609046-2_B.2d_dxf.zip

English

Customer View Model



[ENG_CVM_CVM_6609046-2_B.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_6609046-2_B.3d_stp.zip](#)

English

3D PDF

3D

Customer View Model

[ENG_CVM_6609046-2_2.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_6609046-2_2.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_6609046-2_2.2d_dxf.zip](#)

English

3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[1654001_CORCOM_PRODUCT_GUIDE_T_SERIES](#)

English

Corcom Combined Selector Charts

English

[1-1654250-1_CORCOM_EMI_RFI_QRG](#)

English