

### Rad-hard plastic quad two-input OR gate



#### **Features**

- Two-input OR gate
- 6 V max. operating
- 7 V max. rating
- 8.5 ns propagation delay
- Nickel/Palladium/Gold-lead-finished (NiPdAu), whisker-free
- · Gold-wires
- RML < 1% and CVCM < 0.1% guaranteed outgassing</li>
- 50 krad (Si) Total Ionizing Dose
- SEL-free up to 62.5 MeV.cm²/mg
- Mass: 80 mg
- · Compliant with ST-LEO-specification

#### **Maturity status link**

LEOAC32

### **Applications**

· Low earth orbit (LEO) applications

### **Description**

The LEOAC32 is a CMOS low power quad 2-input OR gate qualified for use in aerospace environments. It operates from a 2 V to 6 V power supply (7 V absolute maximum rating).

The LEOAC32 can operate over a large temperature range of -40  $^{\circ}$ C to +125  $^{\circ}$ C and it is housed in plastic TSSOP-20, Thin-Shrink Small Outline Package, 20 leads, using golden bonding and Nickel/Palladium/Golden-lead-finishing to prevent whiskers.

The LEOAC32 is compliant with ST-LEO-specification, dedicated specification for space-ready rad-hard plastic products. This AEC-Q100-based specification offers a specific trade-off between footprint size savings, cost of ownership and quality assurance, together with radiation hardness and large quantity capability.



# 1 Functional description

1A [ 20 VCC 1B [ 19 3A 1Y 3 18 3B 2A 4 17 3Y 2B 5 16 4A 2Y 6 15 4B NC 14 4Y NC 8 13 NC NC 9 12 NC GND 10 11 NC

Figure 1. Pin connections (top view)

NC: not internally connected.

The pin can be externally connected to any potential.

 Each gate

 INPUT (A)
 INPUT (B)
 OUTPUT (Y)

 L
 L
 L

 L
 H
 H

 H
 H
 H

 H
 H
 H

Table 1. Truth table

with: L = low level, H = high level.

For all inputs,  $V_{IN} = V_{IH}$  minimum or  $V_{IL}$  maximum, verify output  $V_{OUT}$ .

DS13854 - Rev 2 page 2/17



# 2 Absolute maximum ratings and operating conditions

Table 2. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V <sub>CC</sub> <sup>(1)</sup>	Maximum power supply between V <sub>CC</sub> and GND	-0.5 to 7	V
V <sub>IN</sub>	DC input voltage range	-0.5 to V <sub>CC</sub> + 0.5 (and 7 V max.)	V
V <sub>OUT</sub>	DC output voltage range	-0.5 to V <sub>CC</sub> + 0.5 (and 7 V max.)	V
I <sub>K</sub>	I/O clamp diode current	± 20	mA
T <sub>stg</sub>	Maximum temperature storage	-65 to +150	°C
T <sub>j</sub> (2)	Maximum junction temperature	+150	°C
R <sub>th</sub> (3)	Junction to ambient thermal resistance $(\Theta_{ja})$	80	°C/W
Kth (°)	Junction to case thermal resistance ( $\Theta_{jc}$ )	17	°C/W
ESD	HBM (human body model)	2k	V
LSD	CDM (charged device model)	1k	V

- 1. All voltages, except differential I/O bus voltage, are with respect to the network ground terminal.
- 2. Maximum junction temperature shall not be exceeded except for allowable short duration burn-in screening conditions as per the method 5004 of MIL-STD-883.
- 3. Short-circuits can cause excessive heating. Destructive dissipation can result from short-circuits on the amplifiers.

Note:

Absolute maximum ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied. All values are referred to GND.

**Table 3. Operating conditions** 

Symbol	Parameter	Min.	Max.	Unit
V <sub>CC</sub>	Analog supply voltage	2	6	V
V <sub>IN</sub>	Input voltage range	0	V <sub>CC</sub>	V
V <sub>OUT</sub>	Output voltage range	0	V <sub>CC</sub>	V
T <sub>a</sub>	Ambient temperature range	-40	+125	°C

Note: All unused inputs must be held at  $V_{CC}$  or GND to ensure proper device operation.

DS13854 - Rev 2 page 3/17



# 3 Electrical characteristics

 $V_{CC}$  = 3 V to 5.5 V, typical values are at ambient  $T_a$  = +25 °C, min. and max. values are at  $T_a$  = -40 °C and +125 °C, unless otherwise specified.

**Table 4. Electrical characteristics** 

Symbol	Parameter	Test conditions	V <sub>CC</sub> (V)	Min.	Тур.	Max.	Unit	
		For all inputs affecting output under test, V <sub>IN</sub> = V <sub>IH</sub>	3	2.9				
		minimum or V <sub>IL</sub> maximum.	4.5	4.4				
		For all other inputs, $V_{IN} = V_{CC}$ or GND, $I_{OH} = -50 \mu A$ .	5.5	5.4				
		For all inputs affecting output under test, $V_{\text{IN}}$ = $V_{\text{IH}}$ minimum or $V_{\text{IL}}$ maximum.	3	2.4				
V <sub>OH</sub> <sup>(1)</sup>	High level output voltage	For all other inputs, $V_{IN} = V_{CC}$ or GND, $I_{OH} = -12$ mA					V	
		For all inputs affecting output under test, $V_{IN} = V_{IH}$ minimum or $V_{IL}$ maximum.	4.5	3.7				
		For all other inputs, $V_{IN} = V_{CC}$ or GND, $I_{OH} = -24$ mA	5.5	4.7				
		For all inputs affecting output under test, VIN = VIH minimum or VIL maximum.	5.5	3.85				
		For all other inputs, $V_{IN} = V_{CC}$ or GND $I_{OH} = -50$ mA						
		For all inputs affecting output under test, $V_{IN} = V_{IH}$	3			0.1		
		minimum or V <sub>IL</sub> maximum.	4.5			0.1		
		For all other inputs, $V_{IN}$ = $V_{CC}$ or GND, $I_{OL}$ = +50 $\mu$ A	5.5			0.1		
		For all inputs affecting output under test, $V_{IN}$ = $V_{IH}$ minimum or $V_{IL}$ maximum.	3			0.5		
V <sub>OL</sub> (1)	Low level output voltage	For all other inputs, $V_{IN}$ = $V_{CC}$ or GND, $I_{OL}$ = +12 mA					V	
VOL	VOL V	For all inputs affecting output under test, $V_{IN} = V_{IH}$ minimum or $V_{IL}$ maximum.	4.5			0.5	5	
		For all other inputs, $V_{IN} = V_{CC}$ or GND, $I_{OL} = +24$ mA	5.5			0.5		
		For all inputs affecting output under test, $V_{\rm IN}$ = $V_{\rm IH}$ minimum or $V_{\rm IL}$ maximum.	5.5			1.65		
		For all other inputs, $V_{IN}$ = $V_{CC}$ or GND, $I_{OL}$ = +50 mA						
			3	-12				
$I_{OH}$	High level output current		4.5	-24				
			5.5	-24			mA	
			3			12	ША	
$I_{OL}$	I <sub>OL</sub> Low level output current		4.5			24		
			5.5			24		
			3	2.1				
V <sub>IH</sub> <sup>(2)</sup>	High level input voltage		4.5	3.15				
			5.5	3.85			V	
			3			0.9	•	
$V_{IL}^{(2)}$	Low level input voltage		4.5			1.35		
			5.5			1.65		

DS13854 - Rev 2 page 4/17



Symbol	Parameter	Test conditions	V <sub>CC</sub> (V)	Min.	Тур.	Max.	Unit
V <sub>IC</sub> +	Positive input clamp voltage	For input under test, I <sub>IN</sub> = 1 mA	0	0.4		1.5	V
V <sub>IC</sub> -	Negative input clamp voltage	For input under test, I <sub>IN</sub> = -1.0 mA	Open	-0.4		-1.5	V
I <sub>IH</sub>	Input current high	For input under test, $V_{IN} = V_{CC}$ For all other inputs, $V_{IN} = V_{CC}$ or GND	5.5			1	μA
I <sub>IL</sub>	Input current low	For input under test, $V_{IN}$ = GND For all other inputs, $V_{IN}$ = $V_{CC}$ or GND	5.5			-1	μA
Іссн	Quiescent supply current, output high	For all inputs, $V_{IN} = V_{CC}$ or GND $I_{OUT} = 0$ A	5.5			40	μA
I <sub>CCL</sub>	Quiescent supply current, output low	For all inputs, $V_{IN} = V_{CC}$ or GND $I_{OUT} = 0$ A	5.5			40	μA
C <sub>IN</sub> (3)	Input capacitance	T <sub>a</sub> = +25 °C	5			8	pF
C <sub>PD</sub> (3)	Power dissipation capacitance	T <sub>a</sub> = +25 °C, F = 1 MHz	5			35	pF
		$C_L$ = 2 pF, $R_L$ = 500 $\Omega$	3		3.3		
T <sub>r</sub> , T <sub>f</sub>	Output rise time and fall	See Figure 2	4.5		2.7		ns
'r, 'T	time	$C_L = 50 \text{ pF, } R_L = 500 \Omega$	3		4.6		115
		See Figure 2	4.5		3.3		
T <sub>PHL</sub> (5)	Propagation delay time An	$C_L = 50 \text{ pF, } R_L = 500 \Omega$	3	1		11.5	
PHL **	to Yn, high to low	See Figure 2	4.5	1		8.5	ne
T <sub>PLH</sub> (5)	Propagation delay time An	$C_L = 50 \text{ pF, } R_L = 500 \Omega$	3	1		12	ns
PLH ''	to Yn, low to high	See Figure 2	4.5	1		9	

- 1. The  $V_{OH}$  and  $V_{OL}$  tests shall be tested at  $V_{CC}$  = 3.0 V and 4.5 V. The  $V_{OH}$  and  $V_{OL}$  tests are guaranteed, if not tested, for other values of  $V_{CC}$ . Limits shown apply to operation at  $V_{CC}$  = 3.3 V, ±0.3 V and  $V_{CC}$  = 5.0 V, ±0.5 V. Tests with input current at +50 mA and -50 mA are performed on only one input at a time with duration not to exceed 10 ms. Transmission driving tests may be performed using  $V_{IN}$  =  $V_{CC}$  or GND. When  $V_{IN}$  =  $V_{CC}$  or GND is used, the test is guaranteed for  $V_{IN}$  =  $V_{IH}$  minimum and  $V_{IL}$  maximum.
- 2. The  $V_{IH}$  and  $V_{IL}$  tests are not required if applied as forcing functions for  $V_{OH}$  and  $V_{OL}$  tests.
- 3. C<sub>IN</sub> and C<sub>PD</sub> shall be measured only for initial qualification and after process or design changes which may affect capacitance. C<sub>IN</sub> shall be measured between the designated terminal and GND at a frequency of 1 MHz. C<sub>PD</sub> shall be tested in accordance with the latest revision of JEDEC Standard JESD20 and table IA herein. For C<sub>IN</sub> and C<sub>PD</sub>, test all applicable pins on five devices with zero failures.
- 4. Power dissipation capacitance  $(C_{PD})$  determines both the power consumption  $(P_D)$  and dynamic current consumption  $(I_S)$ . Where:  $P_D = (C_{PD} + C_L) \ (V_{CC} \times V_{CC}) \ f + (I_{CC} \times V_{CC}) \ and \ I_S = (C_{PD} + C_L) \ V_{CC} \times f + I_{CC}$ , and f is the frequency of the input signal and  $C_L$  is the external output load capacitance.
- 5. For propagation delay tests, all paths are tested. The AC limits at  $V_{\rm CC}$  = 5.5 V are equal to the limits at  $V_{\rm CC}$  = 4.5 V and guaranteed by testing at  $V_{\rm CC}$  = 4.5 V. The AC limits at  $V_{\rm CC}$  = 3.6 V are equal to the limits at  $V_{\rm CC}$  = 3.0 V and guaranteed by testing at  $V_{\rm CC}$  = 3.0 V. Minimum AC limits for  $V_{\rm CC}$  = 5.5 V and  $V_{\rm CC}$  = 3.6 V are 1.0 ns and guaranteed by guard banding the  $V_{\rm CC}$  = 4.5 V and  $V_{\rm CC}$  = 3.0 V minimum limits, respectively, to 1.5 ns. For propagation delay tests, all paths must be tested.

DS13854 - Rev 2 page 5/17



### 4 Waveform and test circuit

Figure 2. Waveform


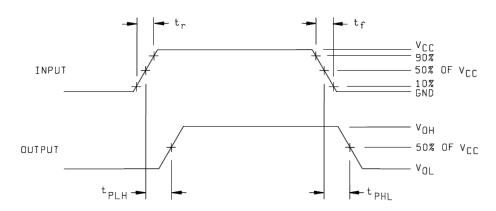


Figure 3. Test circuit



#### Notes:

- $V_{TEST}$  = open for  $t_{PLH}$  and  $t_{PHL}$ .
- C<sub>L</sub> = 50 pF or equivalent (includes probe and jig capacitance).
- $R_L = 500 \Omega$  or equivalent.
- Input signal from pulse generator:  $V_{IN}$  = 0.0 V to  $V_{CC}$ ;  $P_{RR}$  < 1 MHz;  $Z_O$  = 50  $\Omega$ ;  $t_r$  < 3.0 ns;  $t_f$  < 3.0 ns;  $t_r$  and  $t_f$  shall be measured from 10% of  $V_{CC}$  to 90% of  $V_{CC}$  and from 90% of  $V_{CC}$  to 10% of  $V_{CC}$ , respectively; duty cycle = 50 percent.
- · Timing parameters shall be tested at a minimum input frequency of 1 MHz.
- The outputs are measured one at a time with one transition per measurement.

DS13854 - Rev 2 page 6/17



### 5 Radiations

#### **Total Ionizing Dose (TID)**

For the qualification, the product is characterized in TID as per MIL-STD-883 TM 1019 up to 50 krad(Si) on 5 biased parts at high dose rate, such a rate being the worst condition for a pure CMOS technology.

All parameters provided in Table 4 apply to both pre- and post-irradiation.

Each new production lot is tested at high dose rate as per MIL-STD-883 TM 1019 on 5 parts.

#### **Heavy ions:**

Single Event Latchup (SEL) is characterized at 125  $^{\circ}$ C at a LET of 62.5 MeV.cm2/mg. The test shows the product is immune to heavy ions at this LET. Heavy-ion trials are performed on qualification lots only.

The results in radiation are summarized in Table 5 as follows:

Table 5. Radiations

Туре	Conditions	Results
TID (1)	<ul> <li>High-dose rate (40 krad (Si) / h)</li> <li>Temperature: 25 °C</li> <li>Performed on 5 biased parts</li> </ul>	Within Table 4 up to 50 krad(Si)
SEL (2)	<ul> <li>LET: 62.5 MeV.cm2/mg (Xenon ions)</li> <li>Temperature: 125 °C</li> <li>Fluence: 1 x 10<sup>7</sup> ions/cm² (10 Million of particles per cm²)</li> <li>Normal incidence</li> </ul>	Immune to SEL up to 62.5 MeV.cm2/mg (extracted from the LEOAC00, by similarity of architecture)

- 1. A total ionizing dose (TID) of 50 krad(Si) is equivalent to 500 Gy(Si), (1 gray = 100 rad).
- 2. SEL: single event latch-up.

DS13854 - Rev 2 page 7/17



# 6 Outgassing

Table 6. Outgas testing

Specification (tested per ASTM E 595)	Value	Unit
Recovered Mass Loss (RML) (1)	0.06	%
Collected Volatile Condensable Material (CVCM) (2)	0.00	%

<sup>1.</sup> RML < 1%.

DS13854 - Rev 2 page 8/17

<sup>2.</sup> CVCM < 0.1%.



# 7 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

### 7.1 TSSOP-20 package information

Figure 4. TSSOP-20 Mechanical drawing

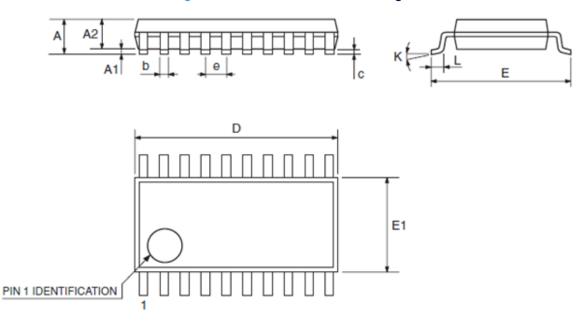


Table 7. TSSOP-20 package mechanical data

Cumbal		Milimeters			Inches <sup>(1)</sup>	
Symbol	Min.	Тур.	Max.	Min	Тур	Max
Α			1.2			0.047
A1	0.05		0.15	0.002	0.004	0.006
A2	0.8	1	1.05	0.031	0.039	0.041
b	0.19		0.30	0.007		
С	0.09		0.20	0.004		
D	6.4	6.5	6.6	0.252	0.256	0.260
E	6.2	6.4	6.6	0.244	0.252	0.260
E1	4.3	4.4	4.48	0.169	0.173	0.176
е		0.65 BSC			0.0256 BSC	
K	0°		8°	0°		8°
L	0.45	0.60	0.75	0.018	0.024	0.030

<sup>1.</sup> Values in inches are converted from mm and rounded to 4 decimal digits.

Note: TSSOP: Thin-Shrink Small Outline Package, using golden bonding and Nickel/Palladium/Golden-lead-finishing.

DS13854 - Rev 2 page 9/17



### 7.2 TSSOP-20 packing information

C(d)=Ø10.0±0.2 C(e)=Ø44.00(R/eft.) E=12.0±0.5 A=Ø13±0.2 F=20(max.)(Ref. B=2±0.5 0 0 0 C(a)=Ø21±0.8 W3 (Includes flange distortion at outer edge) C(b)158(Ref.) T(b)=1.20±0.15 C(c)=70(Ret// W2 ž --0-00.09@=D T(a)=1.00±0.15 0-00.081&=a H3=3.00±0.2 (Date code area) Ref. 856(Ref.) - HZ=5.00±0.2 EIAJ-RRMXXB nim8t=8L C(f)=3±0.5 H1=4.00±0.2

Figure 5. TSSOP-20 Carrier tape (dimensions in mm)

DS13854 - Rev 2 page 10/17



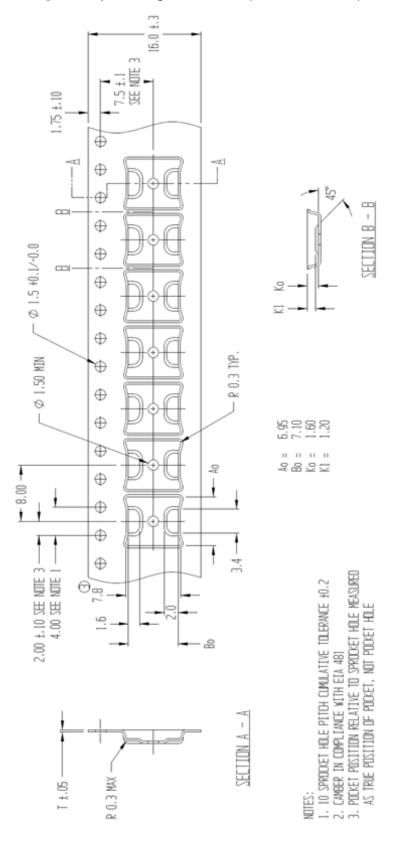


Figure 6. Tape drawing for TSSOP-20 (dimensions in mm)

DS13854 - Rev 2 page 11/17



# 8 Ordering information


**Table 8. Ordering information** 

Order code	Quality level	Package	Lead-finish	Marking	Packing
LEOAC32PT-D	Development sample	TSSOP-20	NiPdAu	DLEOAC32	Tape & reel
LEOAC32PT	Flight model	TSSOP-20	NiPdAu	LEOAC32	Tape & reel

Table 9. Order code

LEO	AC32	Р	Т
LEO Qualification	Name	TSSOP package	Tape & reel

Figure 7. Marking



- a: pin-1 reference
- A: Second Level of interconnexion (type of lead-finishing)
- B: ST logo
- C: Assy plant
- D: Lot code
- E: Marking area
- F: Country of origin
- G: Assy year
- H: Assy week

DS13854 - Rev 2 page 12/17



# **Revision history**

Table 10. Document revision history

Date	Revision	Changes
10-Jan-2022	1	Initial release.
31-Jan-2022	2	Removed footnote in Table 8. Ordering information.

DS13854 - Rev 2 page 13/17



# **Contents**

1	Fun	ctional description	2
2	Abs	solute maximum ratings and operating conditions	3
3	Elec	ctrical characteristics	4
4	Wav	veform and test circuit	6
5	Rad	liations	7
6	Out	gassing	8
7	Pac	kage information	9
	7.1	TSSOP-20 package information	9
	7.2	TSSOP-20 packing information	10
8	Ord	ering information	12
Re	/ision	history	13



# **List of tables**

Table 1.	Truth table
Table 2.	Absolute maximum ratings
Table 3.	Operating conditions
Table 4.	Electrical characteristics
Table 5.	Radiations
Table 6.	Outgas testing
Table 7.	TSSOP-20 package mechanical data
	Ordering information
Table 9.	Order code
Table 10.	Document revision history



# **List of figures**

Figure 1.	Pin connections (top view)	2
Figure 2.	Waveform	6
Figure 3.	Test circuit	6
Figure 4.	TSSOP-20 Mechanical drawing	9
Figure 5.	TSSOP-20 Carrier tape (dimensions in mm)	10
Figure 6.	Tape drawing for TSSOP-20 (dimensions in mm)	11
Figure 7.	Marking	12



#### **IMPORTANT NOTICE - PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2022 STMicroelectronics - All rights reserved

DS13854 - Rev 2 page 17/17