5mm Screw PCB Terminal Modular





Specifications:

Wire Range

Rating Current
Minimum Insulation Withstand Voltage


 $\begin{array}{lll} \mbox{Minimum Insulation Withstand Voltage} & : 2,000V \mbox{ AC} \\ \mbox{Insulation Resistance} & : >2,000M\Omega \mbox{ 500V DC} \\ \mbox{Operating Temperature} & : -40^{\circ}\mbox{C to } +105^{\circ}\mbox{C} \\ \mbox{Wire Strip Length} & : 4mm \mbox{ to 5mm} \\ \end{array}$

Screw Torque : 7lb-inch

RoHS Compliant

: 16A, 300V AC

: 12AWG to 26AWG

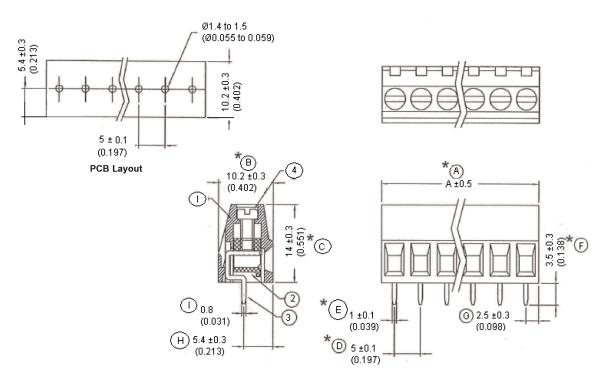

Dimensions: Millimetres (Inches)

Finish and Others

Item No	Material		Plating / Finish	Remark
1	Insulating Body	Polyamide 66	-	Green
2	Cage Clamp	Steel	Ni Plated	-
3	Terminal	Brass	Tin Plated	-
4	Screw	Steel	Ni Plated	-

www.element14.com www.farnell.com www.newark.com



5mm Screw PCB Terminal Modular



Dimensions Table

Pitch : 5mm (0.197inch)				
Poles	A (mm)	A (Inch)		
2	10	0.394		
3	15	0.591		
4	20	0.787		
5	25	0.984		
6	30	1.181		
8	40	1.575		
10	50	1.969		
12	60	2.362		

Part Number Table

Description	Part Number
Terminal Block PCB, 5mm Screw, 02 Way	MC000026
Terminal Block PCB, 5mm Screw, 03 Way	MC000027
Terminal Block PCB, 5mm Screw, 04 Way	MC000028
Terminal Block PCB, 5mm Screw, 05 Way	MC000029
Terminal Block PCB, 5mm Screw, 06 Way	MC000030
Terminal Block PCB, 5mm Screw, 08 Way	MC000031
Terminal Block PCB, 5mm Screw, 10 Way	MC000032
Terminal Block PCB, 5mm Screw, 12 Way	MC000033

Important Notice: This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com www.farnell.com www.newark.com

