



TECH PUBLIC

台舟电子

TP142C Series

450mA 2uA Higt PSRR Voltage Regulator

www.sot23.com.tw

General Description

The TP142C is a low-dropout (LDO) voltage regulator with enable function that operates from a 1.2V to 5.5V supply. It provides up to 450mA of output current in miniaturized packaging.

The feature of 2 μ A low quiescent current and 0.5 μ A shutdown current are ideal for the battery application with long service life. The other features include current limit function, over temperature protection and output discharge function.

Features

- 2 μ A Ground Current at no Load
- $\pm 2\%$ Output Accuracy
- 450mA Output Current
- 10nA Disable Current (by option)
- Wide Operating Input Voltage Range: 1.2V to 5.5V
- Dropout Voltage: 0.18V at 300mA ($V_{OUT}=3.3V$)
- Support Fixed Output Voltage 1.2V, 1.5V, 1.6V, 1.8V, 2.5V, 2.8V, 3.0V, 3.3V
- Stable with Ceramic or Tantalum Capacitor
- Current Limit Protection
- Over-Temperature Protection
- SOT23-3, SOT23-5, DFN-4(1x1) and DFN-6(2x2) SOT353 Packages Available

Applications

- Portable, Battery Powered Equipment
- Low Power Microcontrollers
- Laptop, Palmtops and PDAs
- Wireless Communication Equipment
- Audio/Video Equipment

Ordering Information

TP142C33C5-1

S5:SOT23-5 Package
S3:SOT23-3 Package
D4:DFN1X1 Package
D6:DFN2X2 Package
C5:SOT353 Package

Output voltage: 12=1.2V
15=1.5V
18=1.8V
30=3.0V
33=3.3V
XX=X.XV



TECH PUBLIC


台舟电子

TP142C Series

450mA 2uA Higt PSRR Voltage Regulator


www.sot23.com.tw

BLOCK DIAGRAM

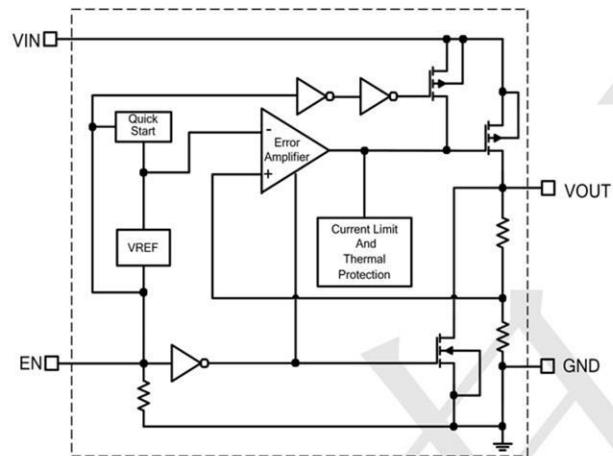


PIN CONFIGURATION


SOT-23-3




SOT-23-5/SOT353



DFN-4L 1x1



DFN-6L 2x2



Pin No				Pin Name	Pin Function
SOT-23-3	SOT-23-5 SOT353	DFN-1X1	DFN-2X2		
1	2	2	3	GND	Ground
2	5	1	1	VOUT	Output of the Regulator
3	1	4	6	VIN	Input of Supply Voltage.
	3	3	4	EN	Enable Control Input.
	4		2,5	NC	No internal connection



TECH PUBLIC

台舟电子

TP142C Serirs

450mA 2uA Higt PSRR Voltage Regulator

www.sot23.com.tw

Absolute Maximum Rating ($T_A=25^\circ\text{C}$ unless otherwise noted)

VIN Pin to GND Pin Voltage	-0.3V to 6.5V
VOUT Pin and EN Pin to GND Pin Voltage	-0.3V to 6V
VOUT Pin to VIN Pin Voltage	-6V to 0.3V
Storage Temperature Range	-60°C~150°C
Lead Temperature (Soldering, 10 sec)	260°C
Junction Temperature	150°C
Operating Ambient Temperature Range T_A	-40°C~85°C
Thermal Resistance Junction to Case, $R_{\theta_{JC}}$	SOT23-3 115°C/W SOT23-5 115°C/W DFN-4(1x1)..... 65°C/W DFN-6(2x2)..... 30°C/W
Thermal Resistance Junction to Ambient, $R_{\theta_{JA}}$	SOT23-3 250°C/W SOT23-5 250°C/W DFN-4(1x1)..... 195°C/W DFN-6(2x2)..... 165°C/W



TECH PUBLIC

台舟电子

TP142C Serirs




450mA 2uA Higt PSRR Voltage Regulator

www.sot23.com.tw

Electrical Characteristics ($T = 25^\circ\text{C}$ unless otherwise noted)

($V_{IN}=5\text{V}$, $V_{EN}=5\text{V}$, $T_A=25^\circ\text{C}$, unless otherwise specified) (Note 1)

PARAMETER	TEST CONDITIONS	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply Voltage		V_{IN}	1.2		5.5	V
DC Output Voltage Accuracy	$I_{LOAD}=0.1\text{mA}$		-2		2	%
SNS Input Current	$SNS=V_{OUT}$	I_{SNS}		0.5		μA
Dropout Voltage (Note 2)	$I_{LOAD}=300\text{mA}, V_{OUT}\geq 3\text{V}$	$V_{DROP_3\text{V}}$		0.18		V
	$I_{LOAD}=300\text{mA}, V_{OUT}=2.8\text{V}$	$V_{DROP_2.8\text{V}}$		0.23		
	$I_{LOAD}=300\text{mA}, V_{OUT}=2.5\text{V}$	$V_{DROP_2.5\text{V}}$		0.23		
	$I_{LOAD}=300\text{mA}, V_{OUT}=1.8\text{V}$	$V_{DROP_1.8\text{V}}$		0.28		
	$I_{LOAD}=300\text{mA}, V_{OUT}=1.5\text{V}$	$V_{DROP_1.5\text{V}}$		0.36		
	$I_{LOAD}=300\text{mA}, V_{OUT}=1.2\text{V}$	$V_{DROP_1.2\text{V}}$		0.45		
GND Current	$I_{LOAD}=0\text{mA}$	I_Q		2		μA
Shutdown GND Current	$V_{EN}=0\text{V}, V_{OUT}=0\text{V}$	I_{SD}		0.1	0.5	μA
V_{OUT} Shutdown Leakage Current	$V_{EN}=0\text{V}, V_{OUT}=0\text{V}$	I_{LEAK}		0.1	0.5	μA
Enable Threshold Voltage	EN Rising	V_{IH}	1.0			V
	EN Falling	V_{IL}			0.4	
EN Input Current	$V_{EN}=5\text{V}$	I_{EN}		10	100	nA
Line Regulation	$I_{LOAD}=30\text{mA}, 1.5\text{V}\leq V_{IN}\leq 5.5\text{V}$ or $(V_{OUT}+0.2\text{V})\leq V_{IN}\leq 5.5\text{V}$	Δ_{LINE}		0.2		%
Load Regulation	$10\text{mA}\leq I_{LOAD}\leq 300\text{mA}$	Δ_{LOAD}		0.2		%
Output Current Limit	$V_{OUT}=0\text{V}$	I_{LIM}	450	500		mA
Power Supply Rejection Ratio	$V_{OUT}=1.2\text{V}, I_{LOAD}=5\text{mA}, V_{IN}=2\text{V}, f=100\text{Hz}$	PSRR		80		dB
	$V_{OUT}=1.2\text{V}, I_{LOAD}=5\text{mA}, V_{IN}=2\text{V}, f=1\text{kHz}$			75		
Output Voltage Noise	$V_{IN}=3.5\text{V}, I_{LOAD}=0.1\text{A}, BW=10\text{Hz to } 100\text{kHz}, C_{OUT}=1\mu\text{F}, V_{OUT}=1.2\text{V}$			80		μV_{RMS}
	$V_{IN}=3.5\text{V}, I_{LOAD}=0.1\text{A}, BW=10\text{Hz to } 100\text{kHz}, C_{OUT}=1\mu\text{F}, V_{OUT}=2.8\text{V}$			120		
Thermal Shutdown Temperature	$I_{LOAD}=10\text{mA}$	T_{SD}		155		$^\circ\text{C}$
Thermal Shutdown Hysteresis	$I_{LOAD}=10\text{mA}$	ΔT_{SD}		15		$^\circ\text{C}$
Discharge Resistance	$V_{EN}=0\text{V}, V_{OUT}=0.1\text{V}$			100		Ω

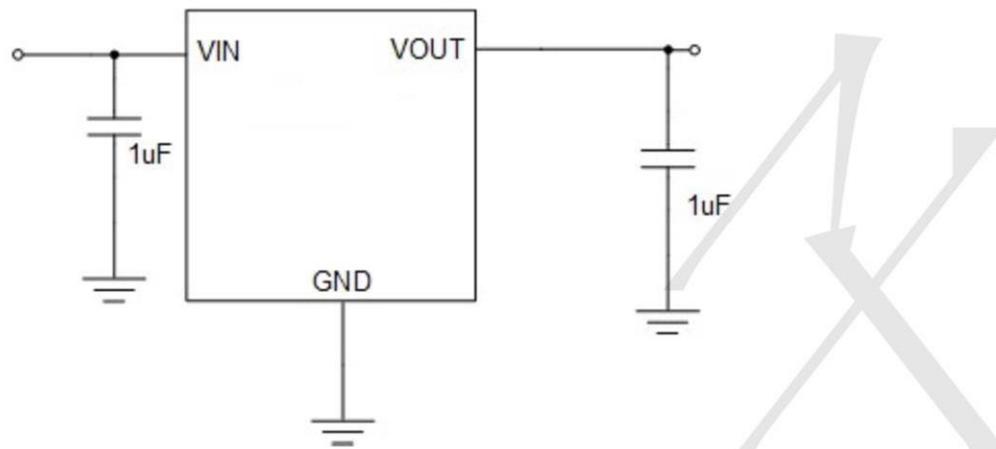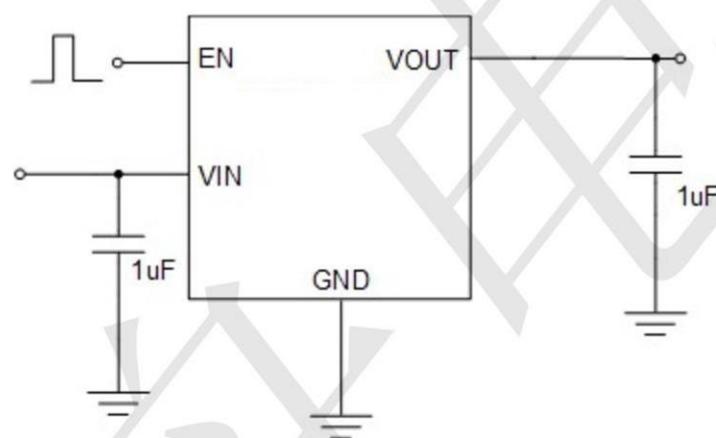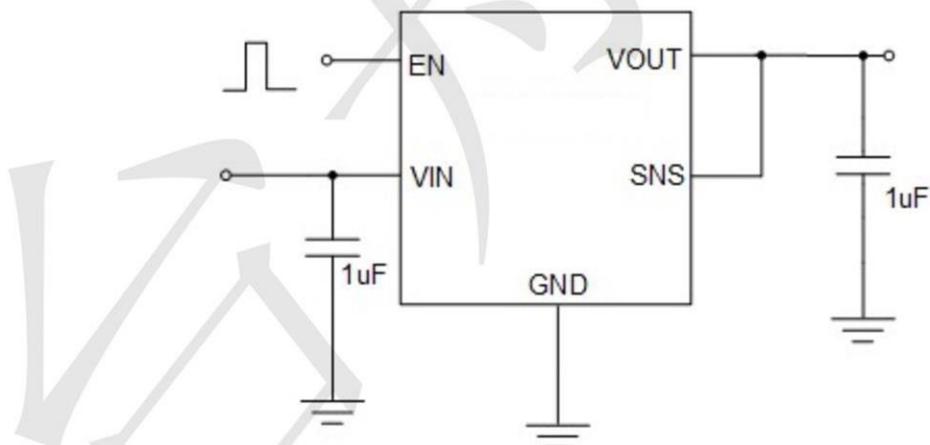TYPICAL APPLICATIONFigure 1: Application circuit of Fixed V_{OUT} LDOFigure 2: Application circuit of Fixed V_{OUT} LDO with enable functionFigure 3: Application circuit of Fixed V_{OUT} LDO with enable and sense functions









TECH PUBLIC

台舟电子

TP142C Series

450mA 2uA Higt PSRR Voltage Regulator

www.sot23.com.tw

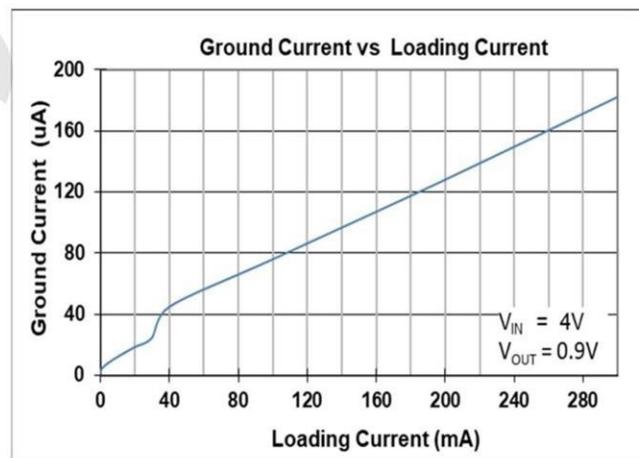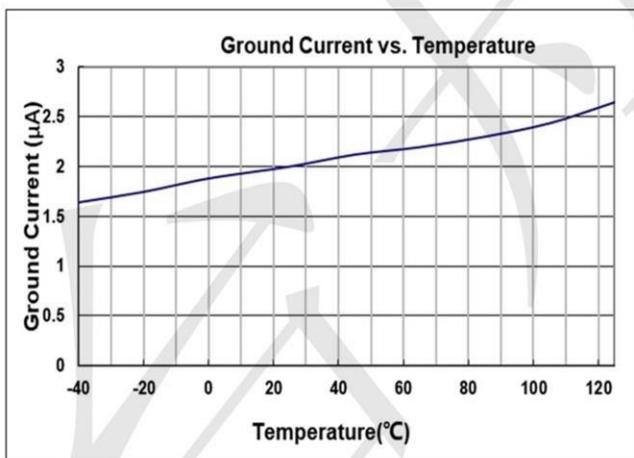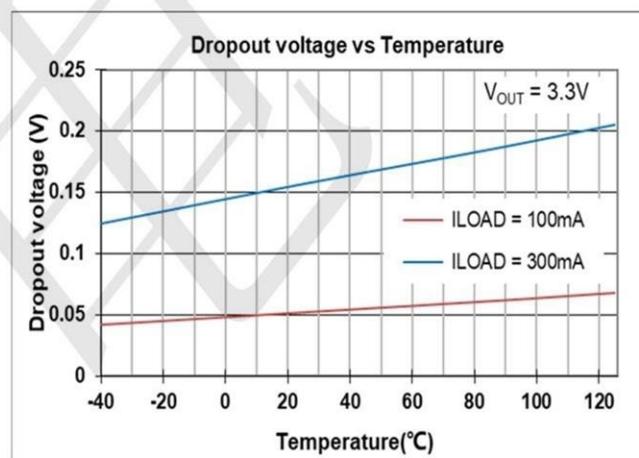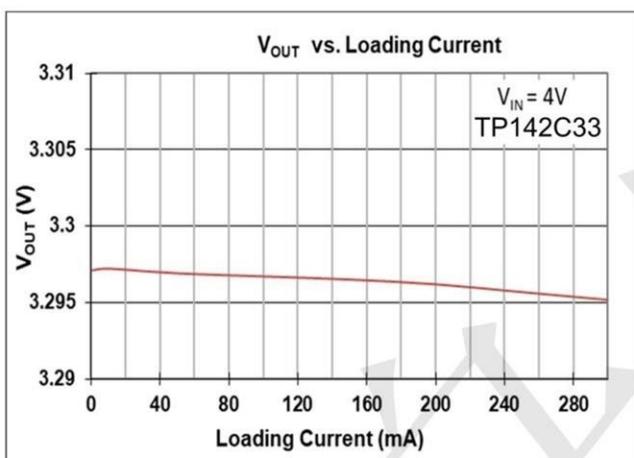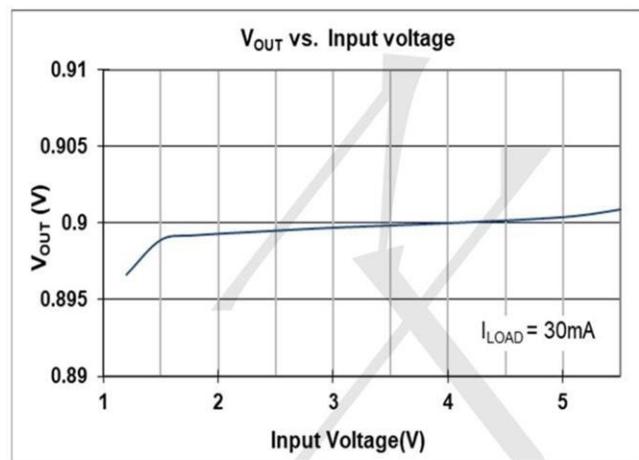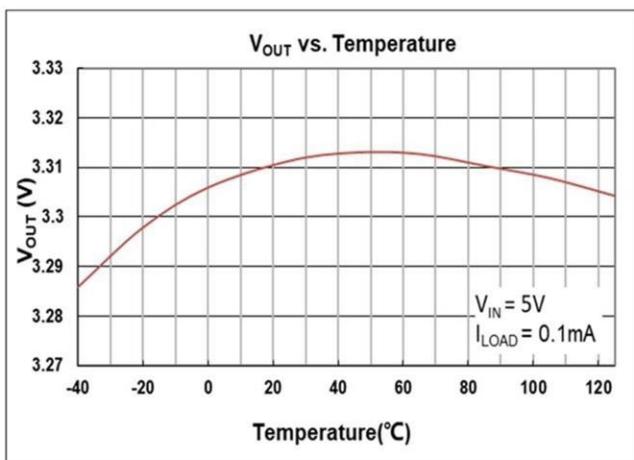









TECH PUBLIC

台舟电子

TP142C Series

450mA 2uA Higt PSRR Voltage Regulator

www.sot23.com.tw

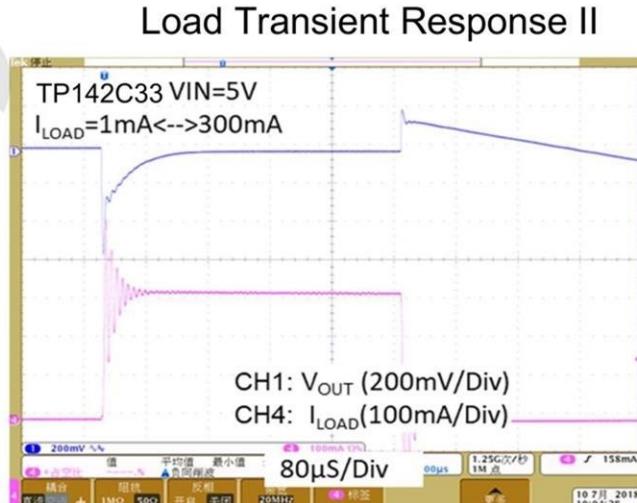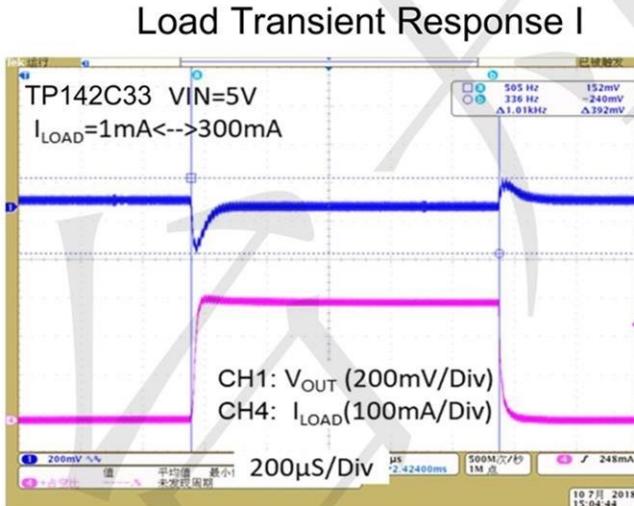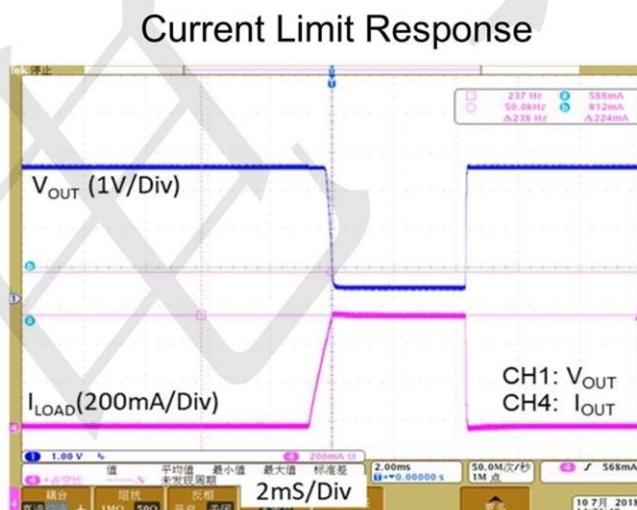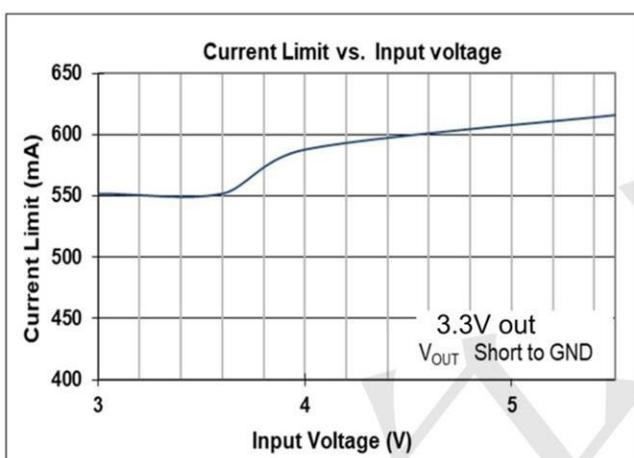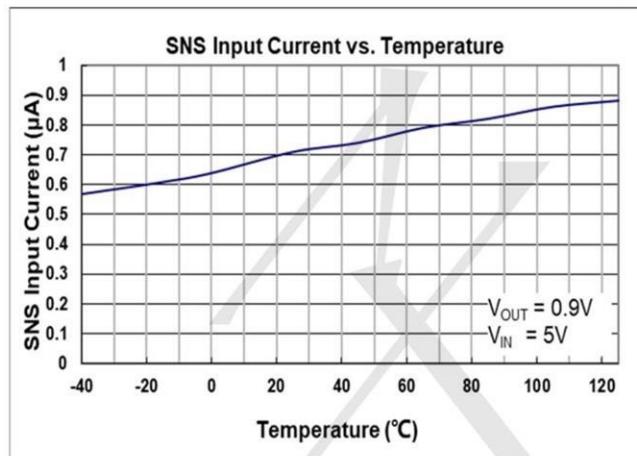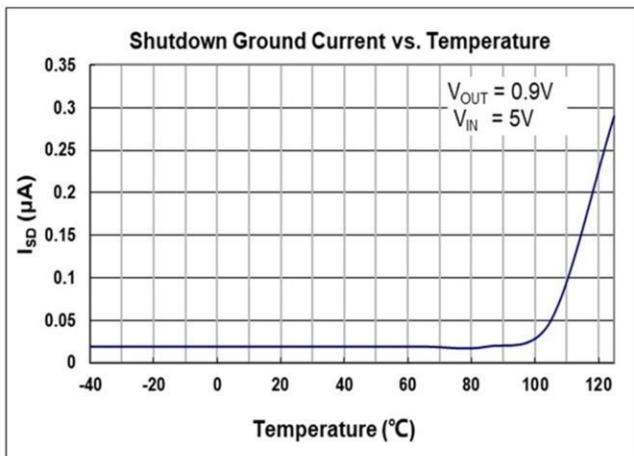



TECH PUBLIC


—台舟电子—

TP142C Serirs


450mA 2uA Higt PSRR Voltage Regulator

www.sot23.com.tw

Line Transient Response

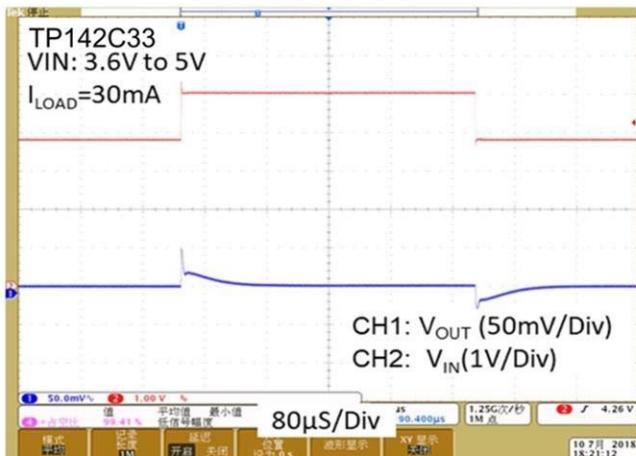

V_{OUT} Turn On/Off by EN

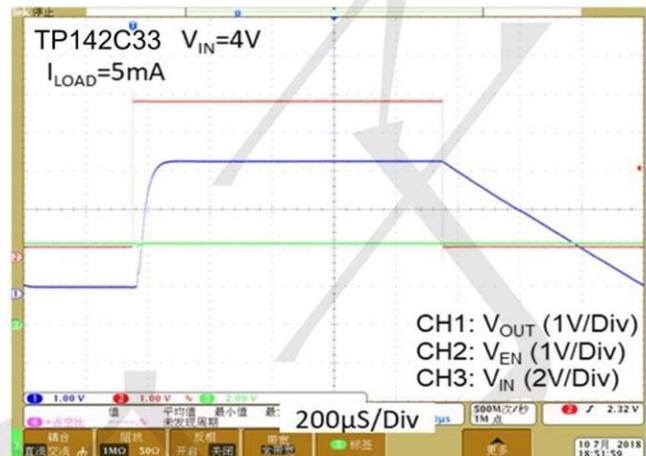



TECH PUBLIC

台舟电子


TP142C Series

450mA 2uA Higt PSRR Voltage Regulator

www.sot23.com.tw

Package information

DFN2X2-6L Outline Dimensions

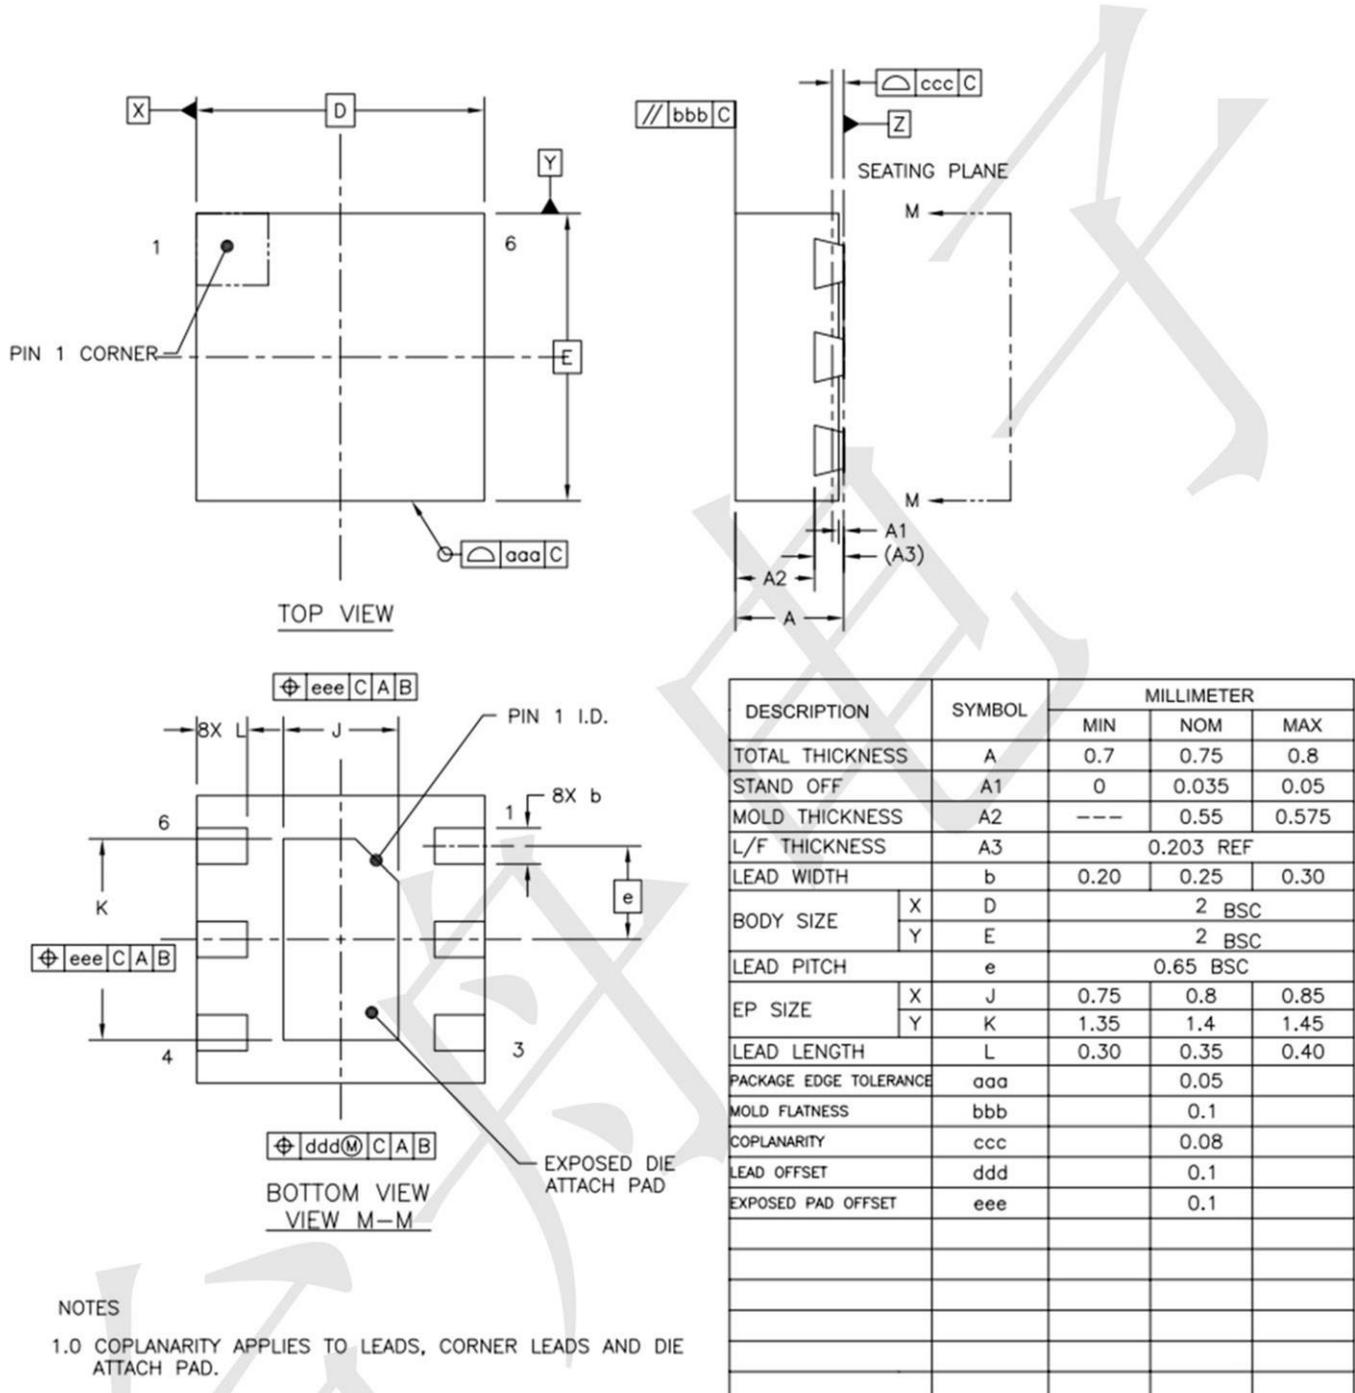



TECH PUBLIC

台舟电子




TP142C Series

450mA 2uA Higt PSRR Voltage Regulator


Package information

www.sot23.com.tw

4-pin DFN-4L Outline Dimensions

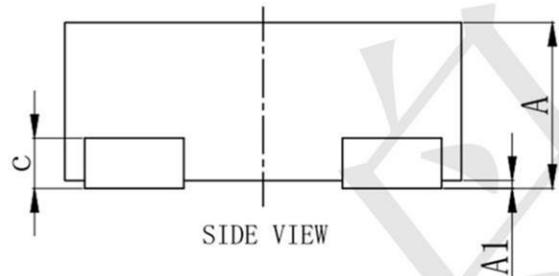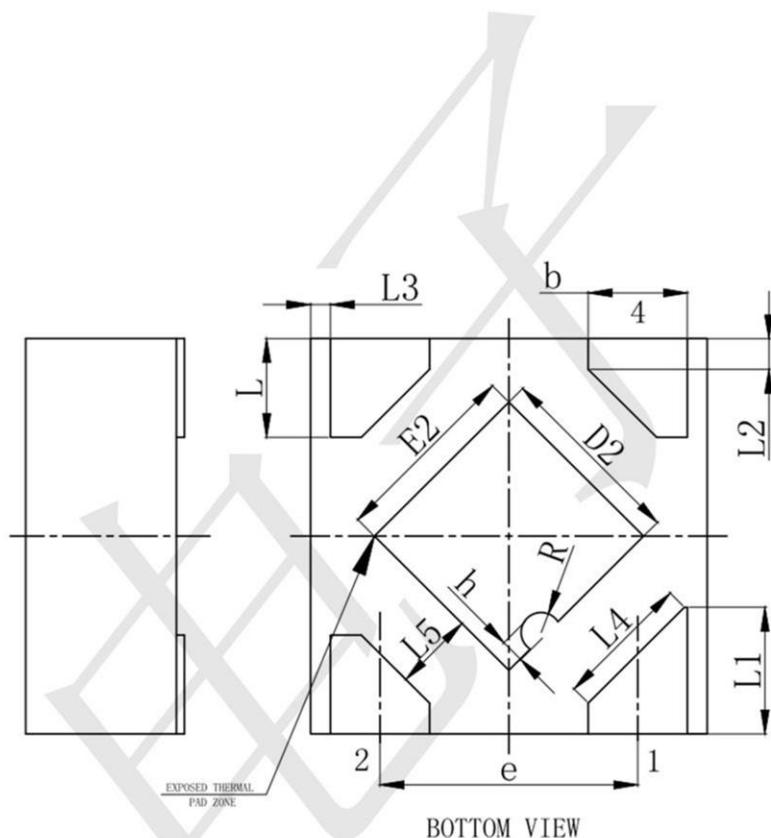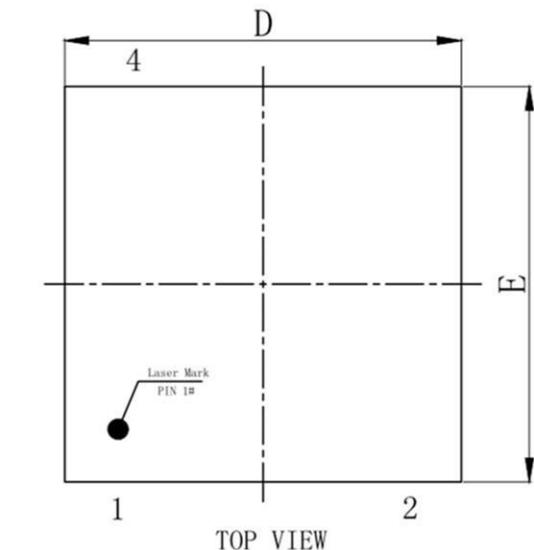

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	0.35	-	0.40
A1	0.00	0.02	0.05
b	0.20	0.25	0.30
c	0.07	0.12	0.17
D	0.95	1.00	1.05
D2	0.38	0.48	0.58
e	0.65BSC		
E	0.95	1.00	1.05
E2	0.38	0.48	0.58
L	0.20	0.25	0.30
L1	0.27	0.32	0.37
L2	0.077REF		
L3	0.05REF		
L4	0.34REF		
L5	0.20REF		
R	0.05REF		
h	0.06REF		

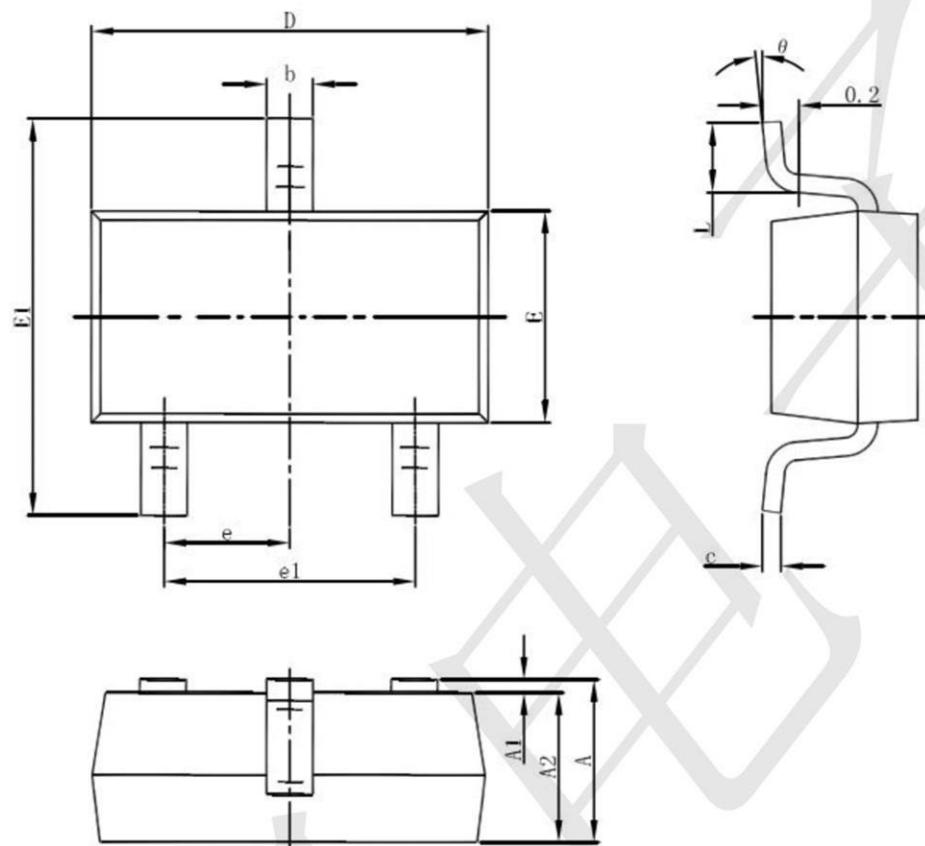Package information**3-pin SOT23-3 Outline Dimensions**

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°




TECH PUBLIC

台舟电子

TP142C Serirs

450mA 2uA Higt PSRR Voltage Regulator

www.sot23.com.tw

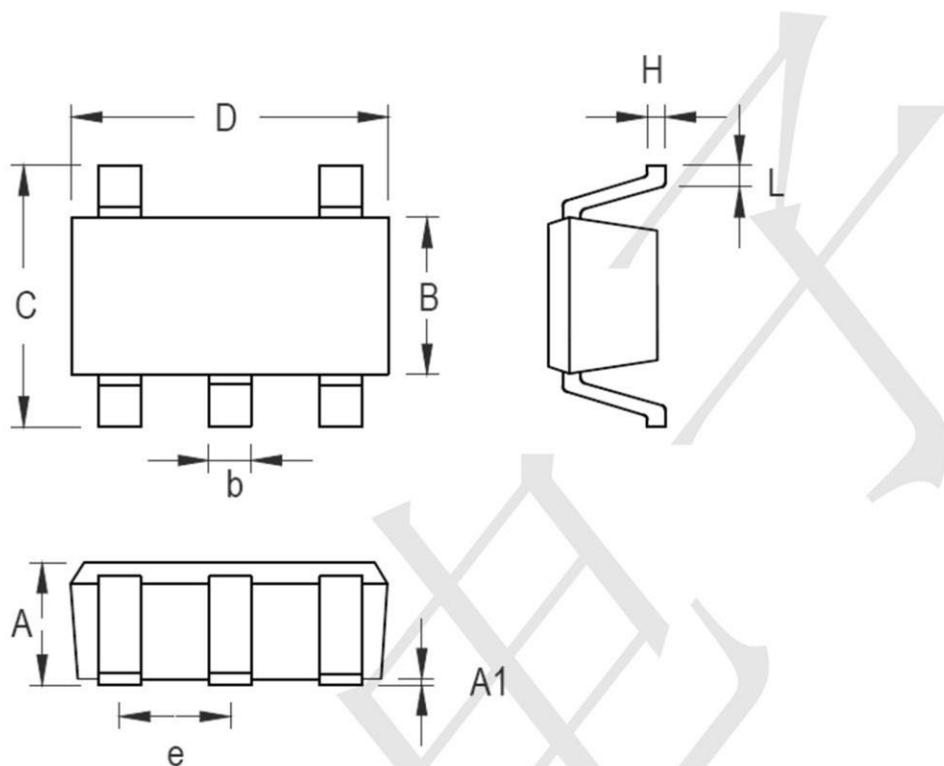

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.800	1.100	0.031	0.044
A1	0.000	0.100	0.000	0.004
B	1.150	1.350	0.045	0.054
b	0.150	0.400	0.006	0.016
C	1.800	2.450	0.071	0.096
D	1.800	2.250	0.071	0.089
e	0.650		0.026	
H	0.080	0.260	0.003	0.010
L	0.210	0.460	0.008	0.018



TECH PUBLIC

台舟电子


TP142C Series

450mA 2uA Higt PSRR Voltage Regulator

Package information

www.sot23.com.tw

3-pin SOT23-5 Outline Dimensions

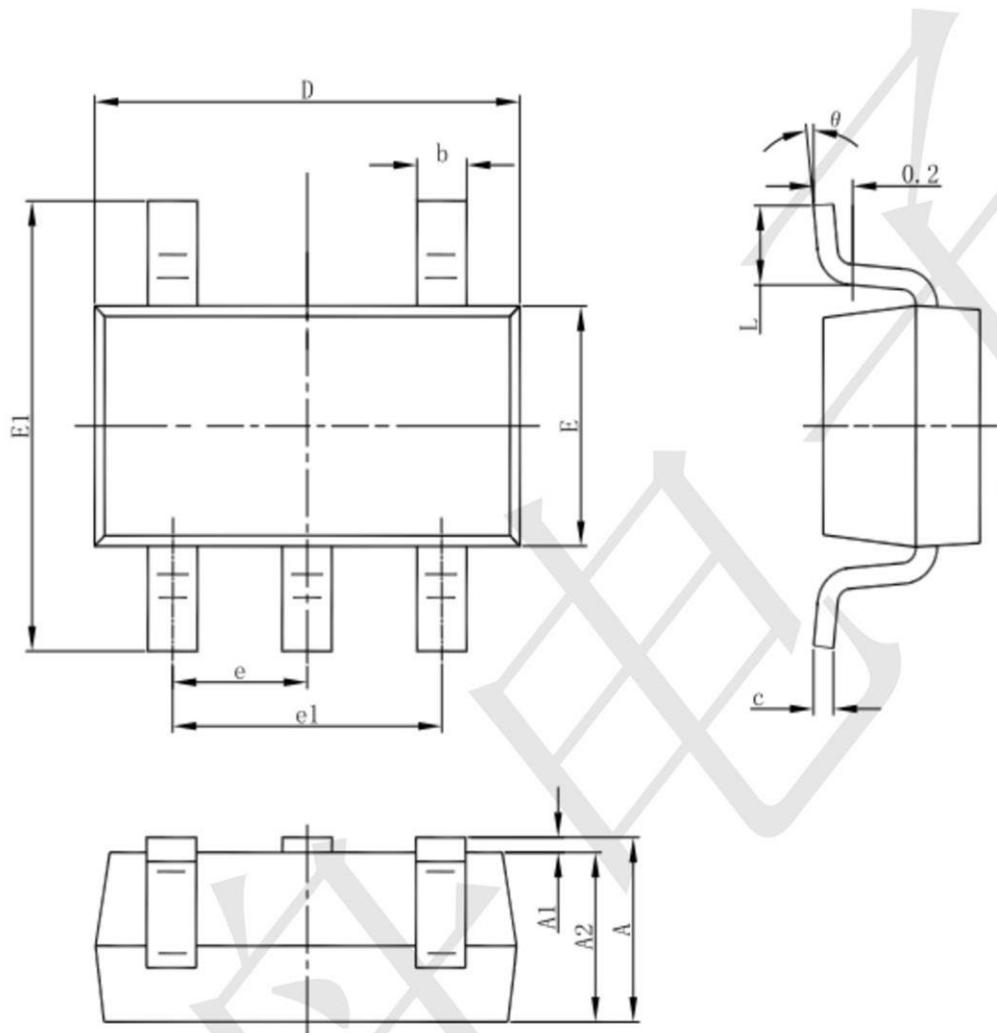

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°