















ESD

TVS

MOS

LDO

Diode

Sensor

DC-DC

Product Specification

Domestic Part Number	EVBAS21/X-S1
Overseas Part Number	BAS21/X
▶ Equivalent Part Number	BAS21/X

"S1" means SOT-23







Switching Diodes

■ Features

- Fast Switching Speed
- Surface Mount Package Ideally Suited for Automatic Insertion
- High Conductance
- For General Purpose Switching Applications



■ Simplified outline(SOT-23)



■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit	
Reverse Voltage	VR	250	V	
Forward Current	lF	200	mA	
Power Dissipation	Pp	200	mW	
Operating Junction Temperature Range	TJ	-55 to +150	$^{\circ}$	
Storage Temperature Range	Tstg	-55 to +150	$^{\circ}$	

■ Electrical Characteristics Ta = 25 °C


Parameter	Symbol	Testconditions	Min	Тур	Max	Unit	
Reverse Breakdown Voltage	V(BR)	IR=100 μ A	250			V	
Forward Voltage	VF	IF=100mA	1.0		V		
Forward voitage		IF=200mA			1.25	v	
Reverse Leakage	lr	V _R =200V			100	nA	
Junction Capacitance	Cj	V _R =0V, f=1.0MHz			5.0	pF	
Reverse Recover Time	Trr				50	nS	

Marking

NO.	EVBAS21-S1	EVBAS21A-S1	EVBAS21C-S1	EVBAS21S-S1
Marking	JS	JS2	JS3	JS4




■ Typical Characterisitics

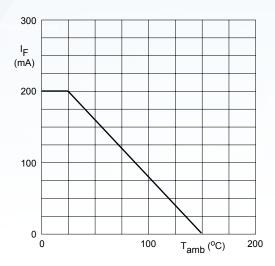


Device mounted on an FR4 printed-circuit board.

Fig.1 Maximum permissible continuous forward current as a function of ambient temperature.

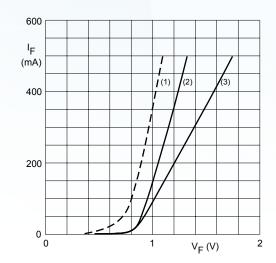

- (1) $T_i = 150 \,^{\circ}\text{C}$; typical values.
- (2) $T_j = 25 \,^{\circ}\text{C}$; typical values.
- (3) $T_j = 25$ °C; maximum values.

Fig.2 Forward current as a function of forward voltage.

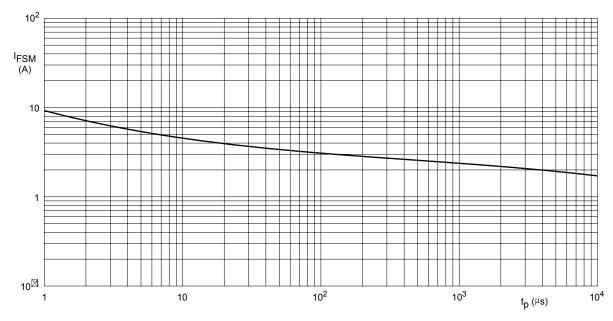


Based on square wave currents.


 T_i = 25 °C prior to surge.

Fig.3 Maximum permissible non-repetitive peak forward current as a function of pulse duration.



■ Typical Characterisitics

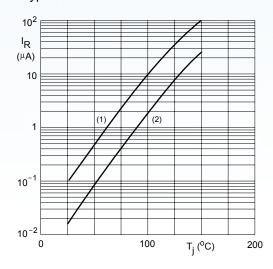



(2) $V_R = V_{Rmax}$; typical values.

Fig.5 Reverse current as a function of junction temperature.


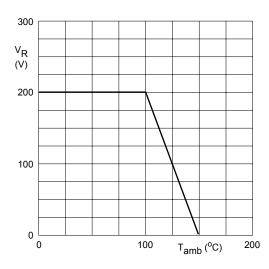


Fig.7 Maximum permissible continuous reverse voltage as a function of the ambient temperature.





f = 1 MHz; $T_j = 25 \,^{\circ}\text{C}$.


Fig.6 Diode capacitance as a function of reverse voltage; typical values.

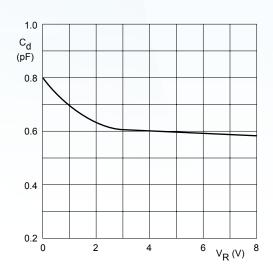



■ SOT-23



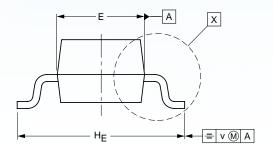

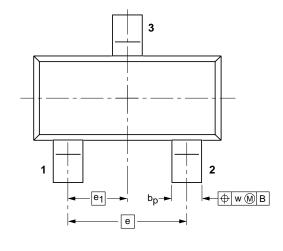





DIMENSIONS (mm are the original dimensions)

UNIT	Α	A ₁ max.	bp	С	D	E	e	e ₁	H _E	Lp	ø	v	w
mm	1.1 0.9	0.1	0.48 0.38	0.15 0.09	3.0 2.8	1.4 1.2	1.9	0.95	2.5 2.1	0.45 0.15	0.55 0.45	0.2	0.1



Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.