


Metric 6mm Hex Female Standoff

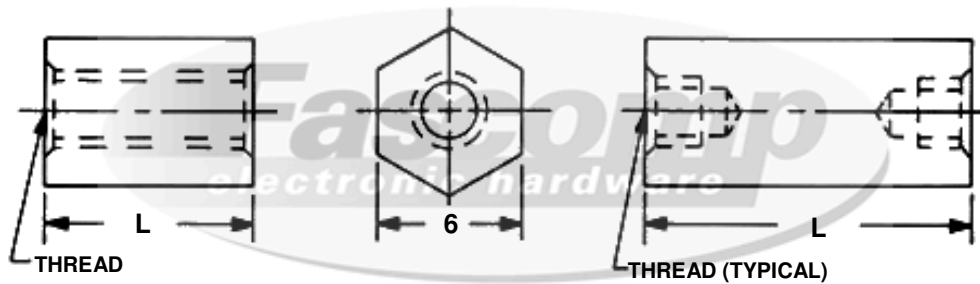

Length Table		
✓ FMXXXX	Length (L)	
FM1300	3	
FM1301	4	
FM1302	5	
FM1303	6	
FM1304	7	
FM1305	8	
FM1306	9	
FM1307	10	
FM1308	11	
FM1309	12	
FM1310	13	
FM1311	14	
FM1312	15	
FM1313	16	
FM1314	17	
FM1315	18	
FM1316	19	
FM1317	20	
FM1318	21	
FM1319	22	
FM1320	23	
FM1321	24	
FM1322	25	
FM1323	28	
FM1324	31	
FM1325	34	
FM1326	37	
FM1327	40	
FM1328	43	
FM1329	46	
FM1330	49	
FM1331	52	

Create a part number:

Length	Thread	Material	Finish
FMXXXX	XXXX	XX	XX
_____ - _____ - _____ - _____			

Thread				
✓ Thread Code	Tapped Thru		Longer Parts	
(XXX)	A, B, S	SS	Blind Tap Depth	
3005	25	19	6.3	
3506	25	25	9.5	
4007	25	25	11.1	

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

Material		
✓ Material Code (XX)		
A	Aluminum	
B	Brass	
S	Steel	
SS	Stainless Steel	

Tolerances
Unless otherwise Specified
 .xxx +/- .13mm
 .xx +/- .26mm
 Angular +/- 1 Degree
 Linear +/- .13mm
Break all sharp edges

Compatible Finish		
A, B, S, SS	0 - Plain	
B, S	5 - Nickel Plate (QQ-N-290)	
A	6 - Iridite #14 Gold (MIL-C-5541E)	
A	7 - Iridite Clear (MIL-C-5541E)	
A	9 - Alodine 1200	
B, S	12 - Zinc Clear (ASTM-B-633)	
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)	
SS	20 - Passivation (MIL-F-14072D)	
A	22 - Clear Anodize (MIL-A-8625-TYPE2)	
A	24 - Black Anodize (MIL-A-8625)	
B, S, SS	26 - Black Oxide	
B, S	28 - Zinc Yellow (ASTM-B-633)	



Fascomp Electronic Hardware
 7814 Kingspointe Pkwy
 Orlando, FL 32819
 www.fascomp.com
 Tel: (407) 226-2112
 Fax: (407) 226-3370

Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Fascomp:

[FM1314-4007-A](#) [FM1316-4007-A](#) [FM1317-4007-A](#) [FM1318-4007-A](#) [FM1319-4007-A](#) [FM1320-4007-A](#) [FM1321-4007-A](#) [FM1321-3005-SS](#) [FM1321-4007-SS](#) [FM1320-3005-SS](#) [FM1322-3005-SS](#) [FM1317-3005-SS](#) [FM1316-3005-SS](#) [FM1313-4007-A](#) [FM1321-3005-A](#) [FM1322-4007-SS](#) [FM1313-3005-SS](#) [FM1314-3005-SS](#) [FM1315-3005-SS](#) [FM1318-3005-SS](#) [FM1319-3005-SS](#) [FM1315-4007-SS](#) [FM1316-4007-SS](#) [FM1317-4007-SS](#) [FM1318-4007-SS](#) [FM1319-4007-SS](#) [FM1320-4007-SS](#) [FM1318-3005-A](#) [FM1319-3005-A](#) [FM1320-3005-A](#) [FM1322-3005-A](#) [FM1313-4007-SS](#) [FM1314-4007-SS](#) [FM1322-4007-A](#) [FM1313-3005-A](#) [FM1314-3005-A](#) [FM1315-3005-A](#) [FM1316-3005-A](#) [FM1317-3005-A](#)