




(1.27 mm) .050"

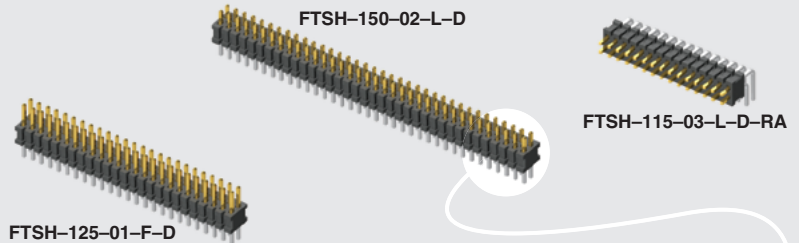

# THROUGH-HOLE MICRO HEADER

## SPECIFICATIONS

For complete specifications see [www.samtec.com?FTSH](http://www.samtec.com?FTSH)

**Insulator Material:** Black Liquid Crystal Polymer  
**Terminal Material:** Phosphor Bronze  
**Plating:** Sn or Au over 50 μm (1.27 μm) Ni  
**Current Rating (FTSH/CLP):** 3.4 A per pin (2 pins powered)  
**Operating Temp Range:** -55 °C to +125 °C  
**RoHS Compliant:** Yes

## PROCESSING

**Lead-Free Solderable:** Yes


## RECOGNITIONS

For complete scope of recognitions see [www.samtec.com/quality](http://www.samtec.com/quality)



## LOCKING CLIP

For single mating cycle with the FFSD. Specify -LC after tail option. Lead Style -01 and 10 pins/row minimum. 5-9 pins/row not available in combination with keying shroud (-K).



## ALSO AVAILABLE (MOQ Required)

- Molded Pick & Place pads
- Other platings

### Notes:

See SFM/TFM for positive alignment feature.

Some sizes, styles and options are non-standard, non-returnable.

**Board Mates:** CLP, FLE

**Cable Mates:** FFSD, FFTP

Impedance matched for high-speed applications (Mated with CLP Series)

Mates with socket strips or IDC cable

Through-hole, right-angle or surface mount

(1.27 mm) .050" micro pitch

(2.51 mm) .099"

Optional end shrouds and ejector shrouds

FTSH	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	D	OPTION	TAIL OPTION	OTHER OPTIONS
02 thru 50			Specify LEAD STYLE from chart	-F = Gold flash on post, Matte Tin on tail -L = 10 μm (0.25 μm) Gold on post, Matte Tin on tail		Leave blank for Right-angle -“XXX” = Polarized Position (Specify position of omitted pin) (Not available with -EX options)	Leave blank for straight tail -RA = Right-angle	-ES = End Shroud (Style -02 & -03) 9 pins/row min. -EP = End Shroud with Guide Post (Style -02 & -03) 9 pins/row min. -EL = End Shroud with Board Lock (Style -02 & -03) 9 pins/row min. -EJ = Ejector Shroud (Style -01 only) 10 pins/row min. 25 pins/row max. -RA not available -K = Keying Shroud for mating with FFSD (Style -01 only, 05, 08, 10, 13, 17, 20 & 25 pins/row only and 13, 17, 20 & 25 only with -EJ option)

LEAD STYLE	A	MATES WITH	OPTION	Z
-01	(3.05) .120	FFSD	-ES	(1.55) .061
-02	(1.91) .075	FLE	-EJ	(15.77) .621
-03	(1.65) .065	CLP-D	-EP	(5.87) .231
-04	(3.81) .150	N/A	-EL	(6.53) .257

Due to technical progress, all designs, specifications and components are subject to change without notice.

[WWW.SAMTEC.COM](http://WWW.SAMTEC.COM)

All parts within this catalog are built to Samtec's specifications. Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Samtec:

[FTSH-113-01-F-D-K](#) [FTSH-110-01-L-D-K](#) [FTSH-113-01-L-D-K](#) [FTSH-105-01-L-D-K](#) [FTSH-120-04-L-D-RA](#) [FTSH-105-01-L-D](#) [FTSH-105-01-F-D-K](#) [FTSH-110-01-L-D](#) [FTSH-105-01-L-D-RA-K](#) [FTSH-130-01-L-D](#) [FTSH-125-04-L-D-RA](#) [FTSH-105-01-F-D](#) [FTSH-106-01-L-D](#) [FTSH-110-01-L-D-EJ](#) [FTSH-113-04-L-D-RA](#) [FTSH-120-03-F-D](#) [FTSH-110-02-L-D-RA](#) [FTSH-111-01-L-D](#) [FTSH-118-01-F-D](#) [FTSH-118-02-F-D-RA](#) [FTSH-118-04-L-D](#) [FTSH-104-01-S-D](#) [FTSH-104-03-F-D](#) [FTSH-106-01-L-D-RA](#) [FTSH-113-01-F-D-RA](#) [FTSH-123-01-L-D](#) [FTSH-139-01-L-D-RA](#) [FTSH-106-01-F-D-K](#) [FTSH-120-01-F-D-K](#) [FTSH-109-01-L-D](#) [FTSH-114-01-F-D](#) [FTSH-114-02-F-D](#) [FTSH-104-02-F-D](#) [FTSH-107-01-S-D-K](#) [FTSH-110-01-F-D-RA-K](#) [FTSH-106-02-F-D](#) [FTSH-110-01-F-D-K](#) [FTSH-128-02-L-D](#) [FTSH-106-02-F-D-RA](#) [FTSH-108-01-L-D](#) [FTSH-119-01-F-D](#) [FTSH-110-01-L-D-RA](#) [FTSH-112-01-L-D-RA](#) [FTSH-140-04-L-D](#) [FTSH-125-01-F-D](#) [FTSH-117-01-L-D](#) [FTSH-116-01-L-D](#) [FTSH-107-01-L-D](#) [FTSH-108-04-F-D](#) [FTSH-113-01-L-D](#) [FTSH-113-01-L-D-EJ-K](#) [FTSH-125-01-F-D-K](#) [FTSH-103-01-F-D](#) [FTSH-105-04-LM-D](#) [FTSH-113-01-F-D](#) [FTSH-113-01-L-D-RA](#) [FTSH-105-02-F-D](#) [FTSH-125-01-F-D-RA](#) [FTSH-128-02-F-D-RA](#) [FTSH-117-01-L-D-RA](#) [FTSH-145-02-F-D-RA](#) [FTSH-104-01-L-D-RA](#) [FTSH-102-01-F-D](#) [FTSH-109-01-F-D-RA](#) [FTSH-103-03-F-D](#) [FTSH-110-04-L-D-RA](#) [FTSH-108-01-L-D-RA](#) [FTSH-106-04-L-D-RA](#) [FTSH-115-01-L-D-RA](#) [FTSH-115-04-L-D](#) [FTSH-120-01-L-D-EJ-K](#) [FTSH-118-01-L-D-RA](#) [FTSH-120-01-L-D-RA](#) [FTSH-124-04-L-D](#) [FTSH-120-02-L-D](#) [FTSH-102-02-F-D](#) [FTSH-102-04-L-D-RA](#) [FTSH-105-02-L-D-RA](#) [FTSH-105-03-L-D](#) [FTSH-110-01-F-D-RA](#) [FTSH-115-01-L-D](#) [FTSH-135-04-L-D-RA](#) [FTSH-103-02-L-D](#) [FTSH-110-01-F-D-007-K](#) [FTSH-109-04-L-D-RA](#) [FTSH-108-01-L-D-K](#) [FTSH-122-02-F-D-RA](#) [FTSH-105-04-F-D](#) [FTSH-107-02-L-D](#) [FTSH-105-01-L-D-RA](#) [FTSH-107-01-L-D-K](#) [FTSH-106-04-L-D](#) [FTSH-110-04-L-D](#) [FTSH-111-01-L-D-RA](#) [FTSH-105-04-F-D-RA](#) [FTSH-118-02-F-D](#) [FTSH-105-01-F-D-007-K](#) [FTSH-125-04-L-D](#) [FTSH-113-01-LM-D-K](#) [FTSH-120-04-L-D](#)