





**Normally closed  
DIP8-pin type  
of 400V load voltage**

**PhotoMOS®**

**GU 2 Form B  
(AQW414)**

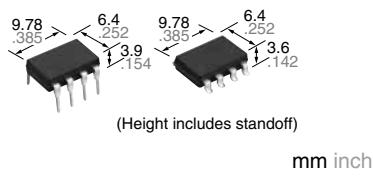


**RoHS compliant**

### FEATURES

1. Approx. 1/2 the space compared with the mounting of Two 1 Form B PhotoMOS units
2. Applicable for 2 Form B use as well as two independent 1 Form B use
3. Controls load currents up to 0.13 A with an input current of 5 mA
4. High speed switching: operate time Typ. 0.46 ms
5. Extremely low closed-circuit offset voltages to enable control of small analog signals without distortion

### TYPICAL APPLICATIONS

- High-speed inspection machines
- Telephone equipment
- Computers
- Sensing equipment

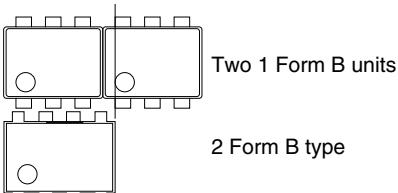

### TYPES

Load voltage	Load current	Package	Part No.				Packing quantity	
			Through hole terminal		Surface-mount terminal			
			Tube packing style		Tape and reel packing style		Tube	Tape and reel
AC/DC dual use	400 V	100 mA	DIP8-pin	AQW414	AQW414A	AQW414AX	AQW414AZ	1 tube contains: 50 pcs. 1 batch contains: 500 pcs. 1,000 pcs

\*Indicate the peak AC and DC values.

Note: The surface mount terminal shape indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

### RATING

#### 1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


	Item	Symbol	AQW414(A)	Remarks
Input	LED forward current	I <sub>F</sub>	50 mA	
	LED reverse voltage	V <sub>R</sub>	5 V	
	Peak forward current	I <sub>FP</sub>	1 A	f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P <sub>in</sub>	75 mW	
Output	Load voltage (peak AC)	V <sub>L</sub>	400 V	
	Continuous load current	I <sub>L</sub>	0.1 A (0.13 A)	Peak AC, DC ( ): in case of using only 1 channel
	Peak load current	I <sub>peak</sub>	0.3 A	100 ms (1 shot), V <sub>L</sub> = DC
	Power dissipation	P <sub>out</sub>	800 mW	
Total power dissipation		P <sub>T</sub>	850 mW	
I/O isolation voltage		V <sub>iso</sub>	1,500 Vrms	
Ambient temperature	Operating	T <sub>opr</sub>	-40 to +85°C -40 to +185°F	(Non-icing at low temperatures)
	Storage	T <sub>stag</sub>	-40 to +100°C -40 to +212°F	

# GU 2 Form B (AQW414)

## 2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQW414(A)	Condition
Input	LED operate (OFF) current	Typical	I <sub>Foff</sub>	0.7 mA
		Maximum		3 mA
	LED reverse (ON) current	Minimum	I <sub>Fon</sub>	0.4 mA
		Typical		0.64 mA
Output	LED dropout voltage	Typical	V <sub>F</sub>	1.25 V (1.14 V at I <sub>F</sub> = 5 mA)
		Maximum		1.5 V
	On resistance	Typical	R <sub>on</sub>	26 Ω
		Maximum		50 Ω
Transfer characteristics	Off state leakage current	Maximum	I <sub>Leak</sub>	1 μA
	Operate (OFF) time*	Typical	T <sub>off</sub>	0.46 ms
		Maximum		1 ms
	Reverse (ON) time*	Typical	T <sub>on</sub>	0.40 ms
		Maximum		1 ms
	I/O capacitance	Typical	C <sub>iso</sub>	0.8 pF
		Maximum		1.5 pF
	Initial I/O isolation resistance	Minimum	R <sub>iso</sub>	1,000 MΩ
				500 V DC

\*Operate/Reverse time

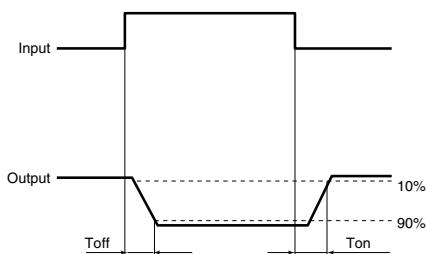

## 3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

Item	Symbol	Number of used channels	Min.	Max.	Unit
LED current	I <sub>F</sub>	AQW414(A)	5	30	mA
Load voltage (Peak AC)	V <sub>L</sub>		—	320	V
Continuous load current	I <sub>L</sub>		1ch 2ch	0.13 0.1	A


■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

## REFERENCE DATA


### 1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C  
-40 to +185°F

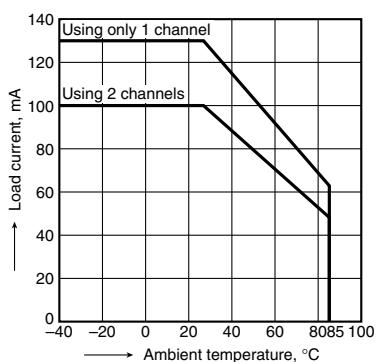


### 2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
LED current: 0 mA;  
Continuous load current: 100 mA (DC)

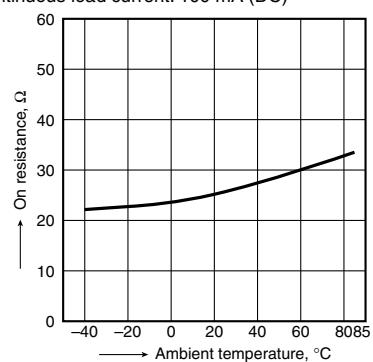


### 3. Operate (OFF) time vs. ambient temperature characteristics

LED current: 5 mA;  
Load voltage: 400 V (DC);  
Continuous load current: 100 mA (DC)

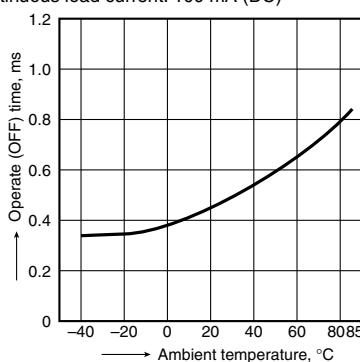


4. Reverse (ON) time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 400 V (DC);  
Continuous load current: 100 mA (DC)

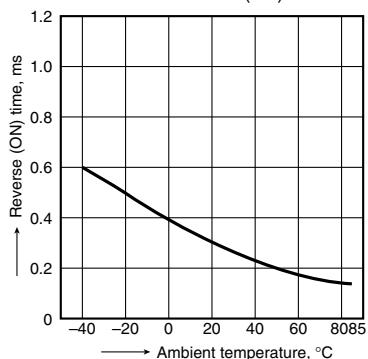


5. LED operate (OFF) current vs. ambient temperature characteristics

Load voltage: 400 V (DC);  
Continuous load current: 100 mA (DC)

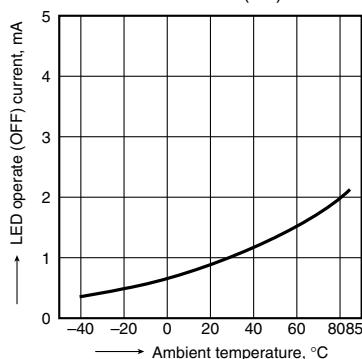


6. LED reverse (ON) current vs. ambient temperature characteristics

Load voltage: 400 V (DC);  
Continuous load current: 100 mA (DC)

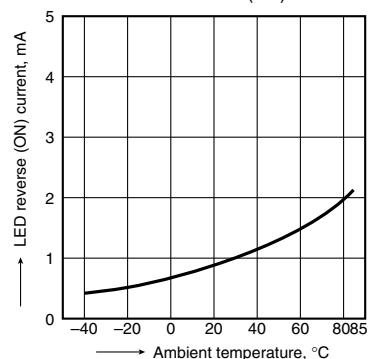


7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

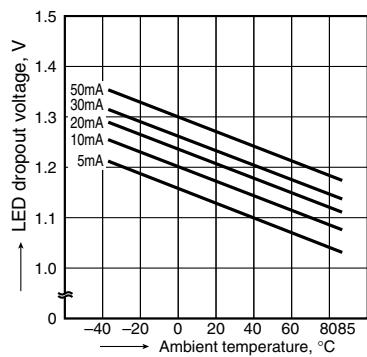


8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8;  
Ambient temperature: 25°C 77°F

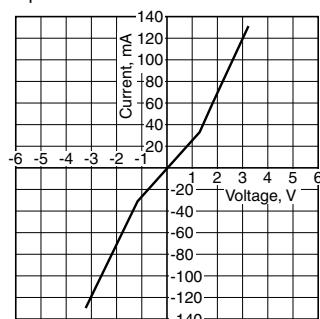


9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
Ambient temperature: 25°C 77°F

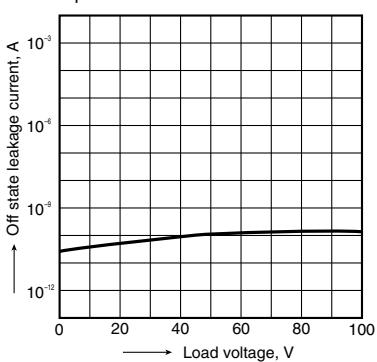


10. Operate (OFF) time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
Load voltage: 400 V (DC);  
Continuous load current: 100 mA (DC);  
Ambient temperature: 25°C 77°F

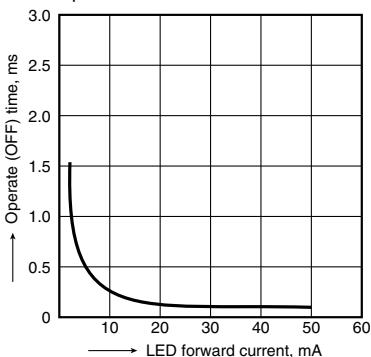


11. Reverse (ON) time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
Load voltage: 400 V (DC);  
Continuous load current: 100 mA (DC);  
Ambient temperature: 25°C 77°F

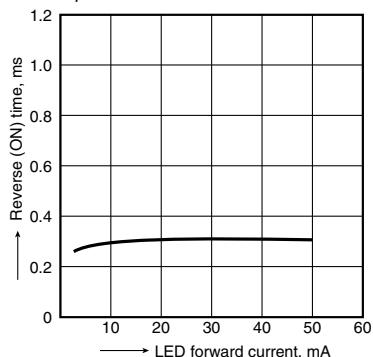

12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
LED current: 5 mA; Frequency: 1 MHz;  
Ambient temperature: 25°C 77°F

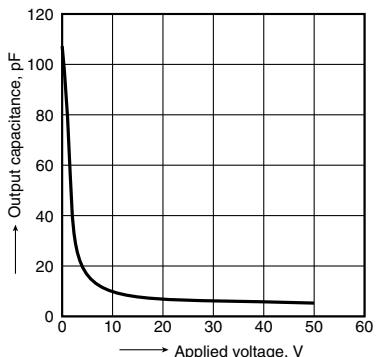

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

\*Recognized in Japan, the United States, all member states of European Union and other countries.

---

Please contact .....

**Panasonic Corporation**

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadomashi, Osaka 571-8506, Japan  
[industrial.panasonic.com/ac/e/](http://industrial.panasonic.com/ac/e/)

**Panasonic®**

©Panasonic Corporation 2017