

Terminal Part Number: 15304718
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,35 | 0,50

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1005
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,45 - 1,88
Seal(s): 15366065

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,35 / 15366065		1,60	50	1,05	0,05	1,80	0,10	4,40	0,10	4,80	0,10
1005 0,50 / 15366065		1,74	80	1,10	0,05	1,80	0,10	4,50	0,10	4,80	0,10

Cable type code legend:

1005:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN

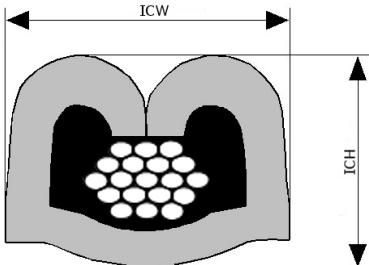

Terminal Part Number: 15304718
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,50

This document is non-contractual
and for information only.


For more information, please
consult your local sales office

Cable Type codes: 1007
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,00 - 2,30
Seal(s): 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,50 / 15366066		2,15	80	1,10	0,05	1,80	0,10	4,50	0,10	4,80	0,10

Cable type code legend:

1007:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPA/PVDF, XLPE
Insul. Wall Designator: REGULAR



Terminal Part Number: 15304718
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 1009
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,30 - 2,60
Seal(s): 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 0,50 / 15366066		2,45	80	1,10	0,05	1,80	0,10	4,60	0,10	4,90	0,10

Cable type code legend:

1009:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: SPECIAL

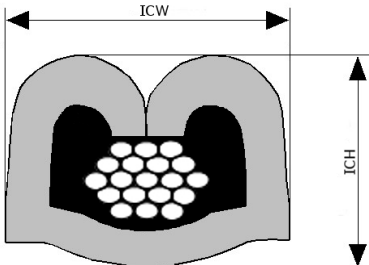

Terminal Part Number: 15304718
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,35

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1025
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,47 - 1,63
Seal(s): 15366065

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1025 0,35 / 15366065		1,55	55	1,05	0,05	1,80	0,10	4,40	0,10	4,80	0,10

Cable type code legend:

1025:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: FLUORPOLYM, HDPE, PBT, PE, PVC, XLPE
Insul. Wall Designator: THIN

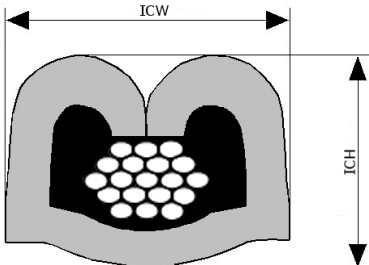

Terminal Part Number: 15304718
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1026
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,00 - 2,30
Seal(s): 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1026 0,50 / 15366066		2,15	80	1,10	0,05	1,80	0,10	4,50	0,10	4,80	0,10

Cable type code legend:

1026:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: HDPE, PVC, XLPE
Insul. Wall Designator: REGULAR

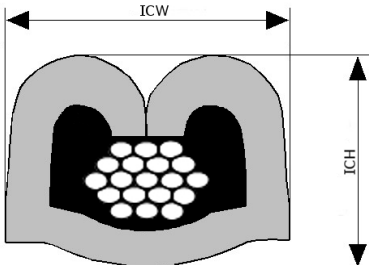

Terminal Part Number: 15304718
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,35

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 1047
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,40 - 1,75
Seal(s): 15366065

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1047 0,35 / 15366065		1,58	70	1,05	0,05	1,80	0,10	4,40	0,10	4,80	0,10

Cable type code legend:

1047:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: THIN

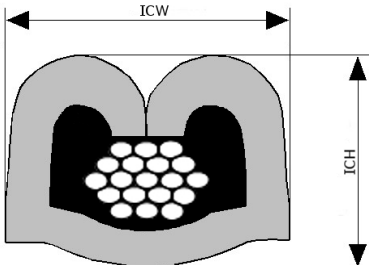

Terminal Part Number: 15304718
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,35

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 1055
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,45 - 1,75
Seal(s): 15366065

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1055 0,35 / 15366065		1,60	70	1,05	0,05	1,80	0,10	4,40	0,10	4,80	0,10

Cable type code legend:

1055:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: HDPE, PVC, XLPE
Insul. Wall Designator: THIN

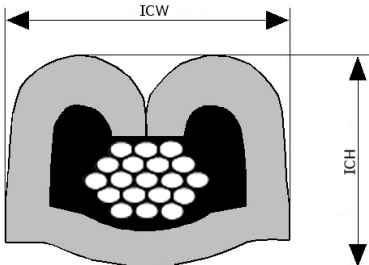

Terminal Part Number: 15304718
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1081
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,25 - 2,40
Seal(s): 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1081 0,50 / 15366066		2,33	80	1,10	0,05	1,80	0,10	4,60	0,10	4,90	0,10

Cable type code legend:

1081:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: POLYALKENE
Insul. Wall Designator: REGULAR

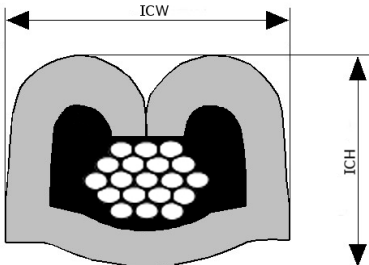

Terminal Part Number: 15304718
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 1094
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,35 - 2,50
Seal(s): 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1094 0,50 / 15366066		2,43	80	1,10	0,05	1,80	0,10	4,60	0,10	4,90	0,10

Cable type code legend:

1094:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: HEAVY DUTY

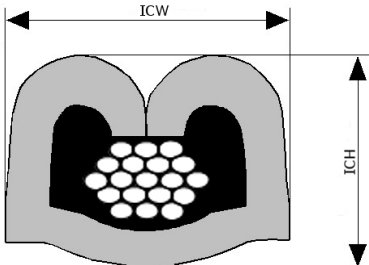

Terminal Part Number: 15304718
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 2006
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,00 - 2,35
Seal(s): 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2006 0,50 / 15366066		2,18	80	1,10	0,05	1,80	0,10	4,50	0,10	4,80	0,10

Cable type code legend:

2006:

Industry Designator: ISO
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: EPR, PVC, XLPE
Insul. Wall Designator: REGULAR

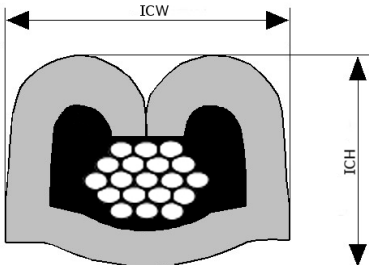

Terminal Part Number: 15304718
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,35 | 0,50

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable Type codes: 2010
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,20 - 1,70
Seal(s): 15366065 | 12191221 | 12191232 | 15324983

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 0,35 / 12191232		1,34	50	1,15	0,05	1,65	0,10	4,60	0,10	4,60	0,10
2010 0,35 / 15324983		1,34	50	1,15	0,05	1,65	0,10	3,80	0,10	4,60	0,10
2010 0,35 / 15366065		1,34	50	1,15	0,05	1,65	0,10	4,05	0,10	4,60	0,10
2010 0,50 / 15366065		1,50	80	1,25	0,05	1,65	0,10	4,15	0,10	4,60	0,10
2010 0,50 / 12191221		1,50	80	1,25	0,05	1,65	0,10	4,70	0,10	4,60	0,10
2010 0,50 / 12191232		1,50	80	1,25	0,05	1,65	0,10	4,70	0,10	4,60	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

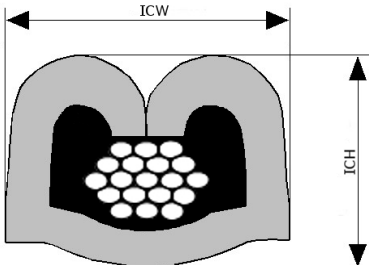

Terminal Part Number: 15304718
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 2011
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,00 - 2,30
Seal(s): 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2011 0,50 / 15366066		2,15	80	1,10	0,05	1,80	0,10	4,50	0,10	4,80	0,10

Cable type code legend:

2011: FL33X, FLK, FLY, FLYKW, IH WIRE
Industry Designator: DIN
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: P/EST, PE, PVC, XLPE
Insul. Wall Designator: REGULAR

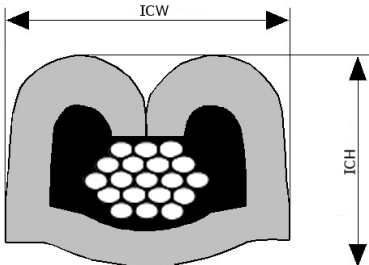

Terminal Part Number: 15304718
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,35 | 0,50

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 2017
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,10 - 1,70
Seal(s): 12191232 | 15366065

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2017 0,35 / 12191232		1,25	50	1,15	0,05	1,65	0,10	4,60	0,10	4,60	0,10
2017 0,35 / 15366065		1,25	50	1,15	0,05	1,65	0,10	4,05	0,10	4,60	0,10
2017 0,50 / 12191232		1,50	80	1,25	0,05	1,65	0,10	4,70	0,10	4,80	0,10
2017 0,50 / 15366065		1,50	80	1,25	0,05	1,65	0,10	4,15	0,10	4,60	0,10

Cable type code legend:

2017: FLR41X-B, FLRY-A
Industry Designator: DIN
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: PA, PP, PVC, XLPE
Insul. Wall Designator: THIN

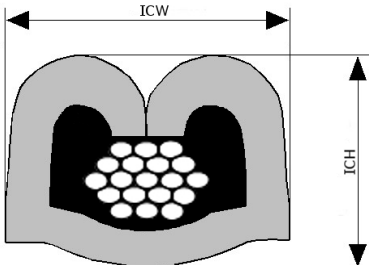

Terminal Part Number: 15304718
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,35 | 0,50

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 2053
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,20 - 1,60
Seal(s): 15366065

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2053 0,35 / 15366065		1,30	50	1,15	0,05	1,65	0,10	4,50	0,10	4,60	0,10
2053 0,50 / 15366065		1,50	80	1,25	0,05	1,65	0,10	4,60	0,10	4,60	0,10

Cable type code legend:

2053: PSA T2 ZH ID, PSA T3 ZH ID, PSA T4 ZH ID
Industry Designator: PSA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: POLYOLEFIN, X-POLY
Insul. Wall Designator: ID

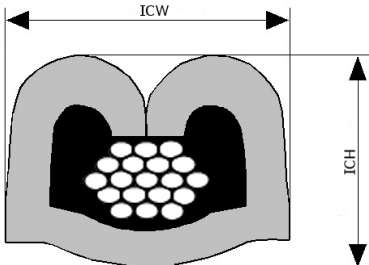

Terminal Part Number: 15304718
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,35 | 0,50

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 2054
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,25 - 1,70
Seal(s): 15366065

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2054 0,35 / 15366065		1,33	50	1,15	0,05	1,65	0,10	4,60	0,10	4,60	0,10
2054 0,50 / 15366065		1,55	80	1,25	0,05	1,65	0,10	4,70	0,10	4,65	0,10

Cable type code legend:

2054: PSA T2 IR, PSA T3 IR, PSA T3 ZH IR, PSA T4 LH IR
Industry Designator: PSA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: POLYOLEFIN, PVC, X-POLY
Insul. Wall Designator: IR

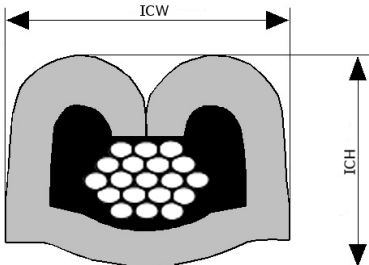

Terminal Part Number: 15304718
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,35

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 2083
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,20 - 1,40
Seal(s): 15366065

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2083 0,35 / 15366065		1,30	55	1,05	0,05	1,80	0,10	4,40	0,10	4,90	0,10

Cable type code legend:

2083:

Industry Designator: ISO
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC (YW)
Insul. Wall Designator: THIN

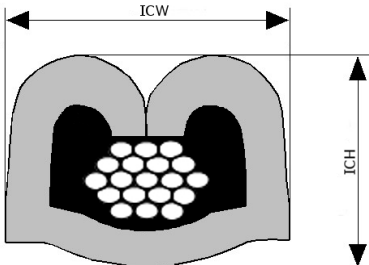

Terminal Part Number: 15304718
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,30 | 0,50

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 3004
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,30 - 1,70
Seal(s): 15366065

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3004 0,30 / 15366065		1,40	60	1,05	0,05	1,80	0,10	4,40	0,10	4,80	0,10
3004 0,50 / 15366065		1,60	80	1,10	0,05	1,80	0,10	4,50	0,10	4,80	0,10

Cable type code legend:

3004: AVSS
Industry Designator: JIS/JA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE, X-PVC
Insul. Wall Designator: THIN

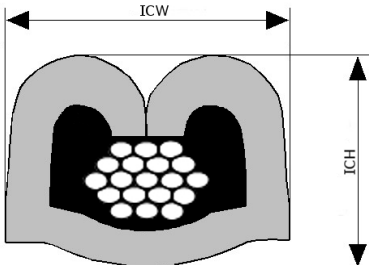

Terminal Part Number: 15304718
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 8000
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,40 - 1,60
Seal(s): 15366065

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
8000 0,50 / 15366065		1,50	80	1,10	0,05	1,80	0,10	4,50	0,10	4,80	0,10

Cable type code legend:

8000:

Industry Designator: N/G
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: SYNTHRESIN
Insul. Wall Designator: THIN

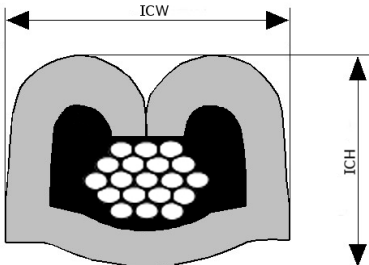

Terminal Part Number: 15304718
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 9000
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,90 - 2,05
Seal(s): 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9000 0,50 / 15366066		1,98	80	1,10	0,05	1,80	0,10	4,60	0,10	4,90	0,10

Cable type code legend:

9000:

Industry Designator: MISC
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVDF
Insul. Wall Designator: MIX

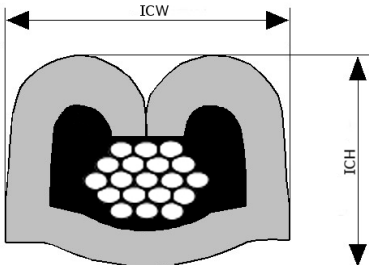

Terminal Part Number: 15304718
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 9003
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,92 - 2,06
Seal(s): 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9003 0,50 / 15366066		1,99	80	1,10	0,05	1,80	0,10	4,50	0,10	4,80	0,10

Cable type code legend:

9003:

Industry Designator: N/G
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: PVDF
Insul. Wall Designator: MIX

