


6		5					4		3		2		1	
ITEM	PART#	DESCRIPTION			QTY	UOM								
A,B	512160400	2.0 WtB Rec Hsg 4Ckt			2	PC								
C	593708000	2.0 WtB Crimp Rec Chn			8	PC								
D	----	WHITE PART ID LABEL			1	PC								

FROM	TO	DESCRIPTION		COLOUR
A1	B1	1X22AWG DISC SR-PVC BK UL10002		BLACK
A2	B2	1X22AWG DISC SR-PVC BK UL10002		BLACK
A3	B3	1X22AWG DISC SR-PVC BK UL10002		BLACK
A4	B4	1X22AWG DISC SR-PVC BK UL10002		BLACK

PART NUMBER	TITLE	L1	L2(REF)
2244821040	MicroTPA 2.0 R-R 4ckt 50mm disc Sn	50±5	15
2244821041	MicroTPA 2.0 R-R 4ckt 100mm disc Sn	100±5	15
2244821042	MicroTPA 2.0 R-R 4ckt 150mm disc Sn	150±5	15
2244821043	MicroTPA 2.0 R-R 4ckt 300mm disc Sn	300±5	15
2244821044	MicroTPA 2.0 R-R 4ckt 600mm disc Sn	600±5	15

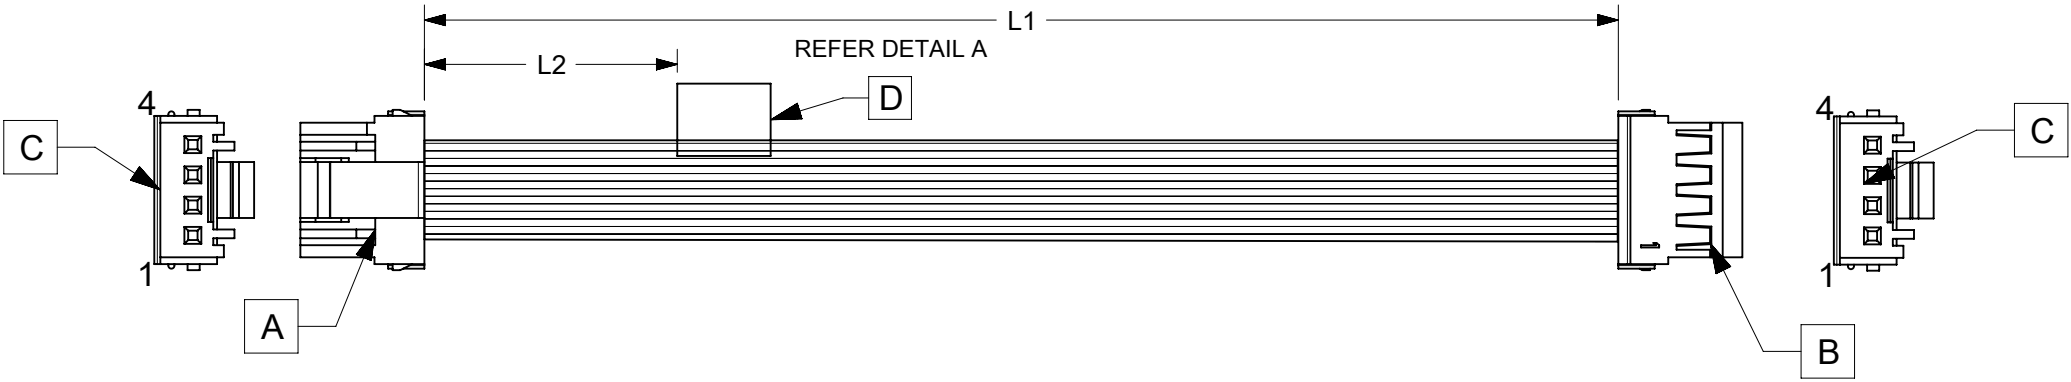

MOLEX P/N
MOLEX
BATCH WK/YR

DETAIL A

- NOTES:
- 1. CABLE ASSEMBLY MUST PASS 100% CONTINUITY AND POLARITY TEST.
 - 2. CONNECTOR VIEW SHOWN FROM MATING SIDE.
 - 3.LABEL TEXT MUST BE 2 MM MAX. IN HEIGHT WITH ARIAL FONT.
 - 4.LABEL MUST BE WRAPPED IN FLAG TYPE ON A SINGLE CABLE.

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2023/01/04	B	INITIAL RELEASE	THANUB
RELEASE STATUS		P1	RELEASE DATE
			2023/02/08

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
$\frac{F_A}{E} = 0$		DIMENSION UNITS	SCALE
$\frac{F_C}{E} = 0$		mm	NTS
$\frac{F_P}{E} = 0$		GENERAL TOLERANCES (UNLESS SPECIFIED)	
DIVISIONAL SYMBOLS		ANGULAR TOL	± °
		4 PLACES	±
		3 PLACES	±
		2 PLACES	±
		1 PLACE	±
		0 PLACES	±
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	
		THIRD ANGLE PROJECTION	DRAWING
		SERIES	MATERIAL NUMBER
		A4-SIZE	224482
		SHEET NUMBER	
		1 OF 1	