



Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

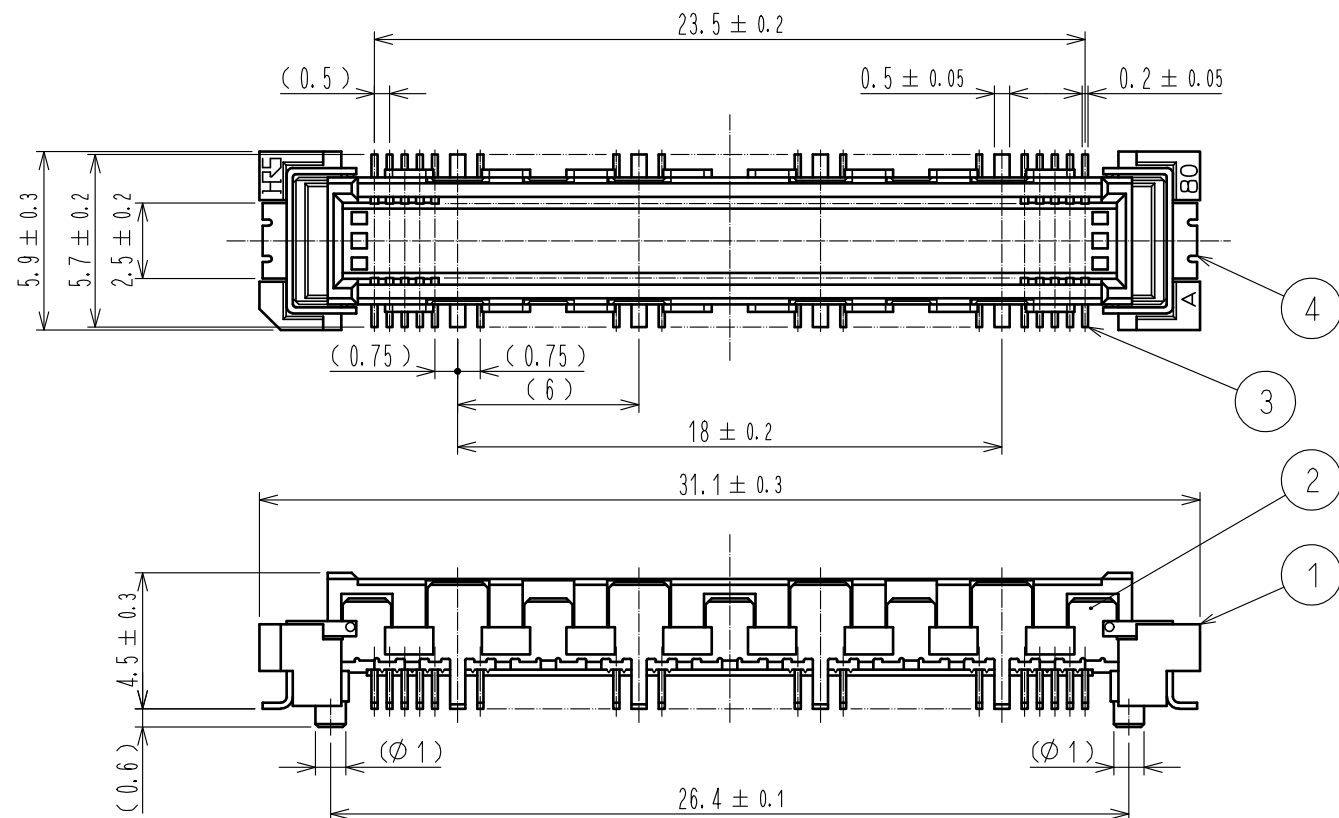


RECOMMENDED LAND PATTERN DIMENSION OF PCB

- NOTES
- 8 HATCHED PARTS: GROUND CIRCUIT.
 - 2 HATCHED PARTS: GROUND CIRCUIT.
 - SMT LEAD-COPLANARITY: 0.1 MAX.
 - THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND. OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - EMBOSSED CARRIER TAPE PACKAGE IS APPLIED ON THIS PRODUCT. PLEASE REFER TO THE SHEET 2/2 FOR THE DETAILS.
 - THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

CROSS CUT SECTION - SIGNAL(5:1)

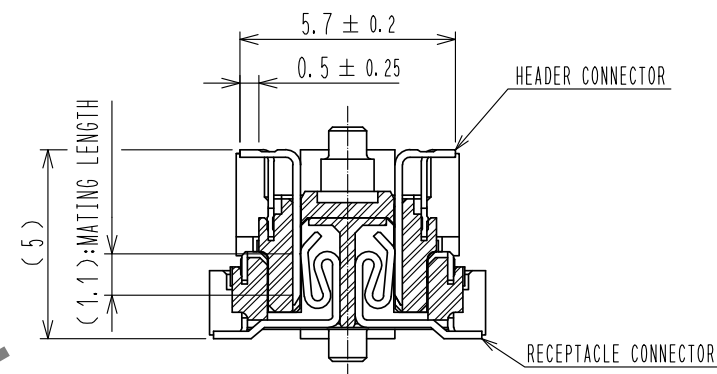


CROSS CUT SECTION - GROUND(5:1)

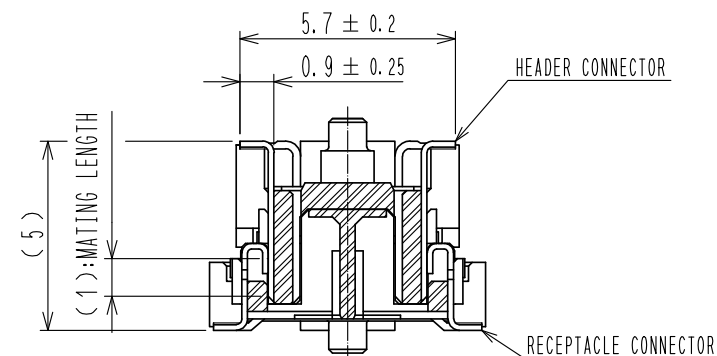

3	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.1 μm min.	6	POLYESTER	TOP COVER TAPE
		LEAD AREA : TIN 1 μm min.			
		UNDER PLATING : NICKEL 1 μm min.			
2	PHOSPHOR BRONZE	TIN-PLATING	5	PS	EMBOSSED CARRIER TAPE
1	LCP	BEIGE	4	PHOSPHOR BRONZE	TIN-PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS : mm					
SCALE : 4 : 1					
COUNT : 1					
DESCRIPTION OF REVISIONS : DIS-F-00015231					
DESIGNED : SY. KUDO					
CHECKED : HT. YAMAGUCHI					
DATE : 20220908					
APPROVED : HS. OKAWA 20070322					
CHECKED : HS. OZAWA 20070322					
DESIGNED : KT. DOI 20070322					
DRAWN : TS. MIYAKI 20070319					
DRAWING NO. : EDC-151960-91-21					
PART NO. : FX10A-80P/8-SV1(91)					
CODE NO. : CL0570-0101-0-91					

DRAWING FOR PACKING(2:1)

REELED DIMENSION (FREE)

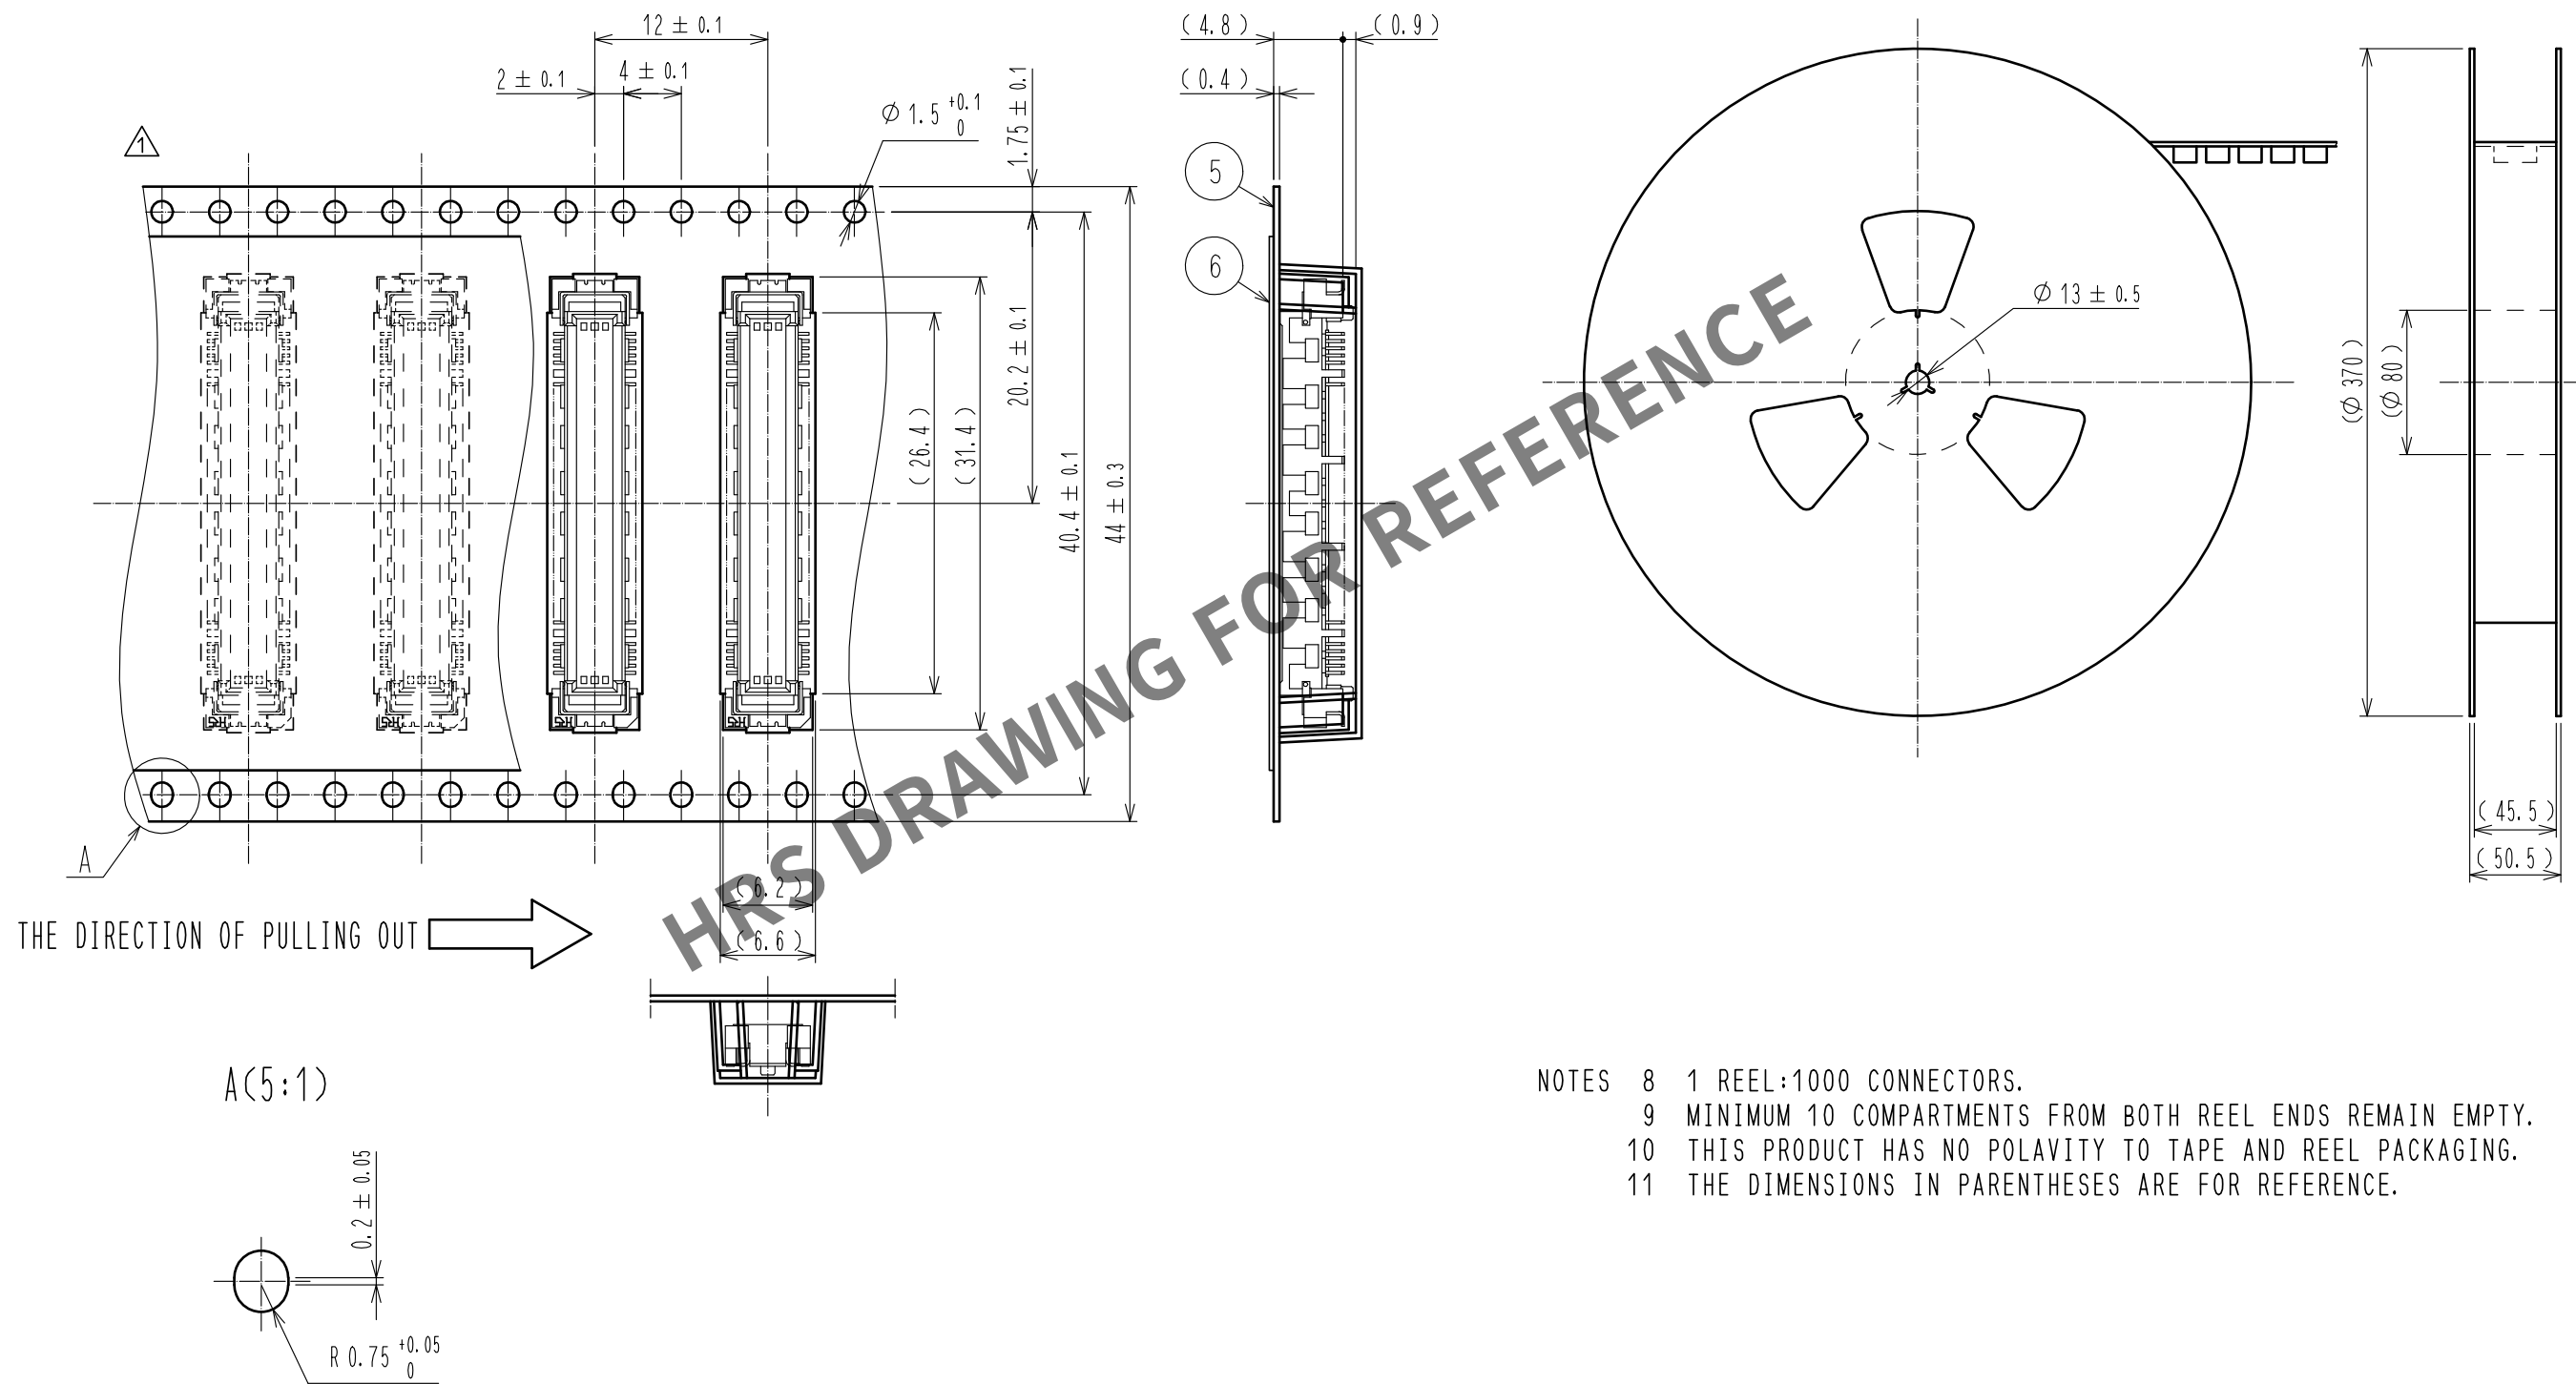

- NOTES
- 1 REEL:1000 CONNECTORS.
 - MINIMUM 10 COMPARTMENTS FROM BOTH REEL ENDS REMAIN EMPTY.
 - THIS PRODUCT HAS NO POLARITY TO TAPE AND REEL PACKAGING.
 - THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

HRS

DRAWING NO.	EDC-151960-91-21
PART NO.	FX10A-80P/8-SV1(91)
CODE NO.	CL0570-0101-0-91

2/2