


6		5		
ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	512161000	2.0 WtB Rec Hsg 10Ckt	2	PC
C	593708000	2.0 WtB Crimp Rec Chn	20	PC
D	----	WHITE PART ID LABEL	1	PC

PART NUMBER	TITLE	L1	L2(REF)
2244821100	MicroTPA 2.0 R-R 10ckt 50mm disc Sn	50±5	15
2244821101	MicroTPA 2.0 R-R 10ckt 100mm disc Sn	100±5	15
2244821102	MicroTPA 2.0 R-R 10ckt 150mm disc Sn	150±5	15
2244821103	MicroTPA 2.0 R-R 10ckt 300mm disc Sn	300±5	15
2244821104	MicroTPA 2.0 R-R 10ckt 600mm disc Sn	600±5	15

3		2		1	
FROM	TO	DESCRIPTION		COLOUR	
A1	B1	1X22AWG DISC SR-PVC BK OD=1.22MM UL10002		BLACK	
A2	B2	1X22AWG DISC SR-PVC BK OD=1.22MM UL10002		BLACK	
A3	B3	1X22AWG DISC SR-PVC BK OD=1.22MM UL10002		BLACK	
A4	B4	1X22AWG DISC SR-PVC BK OD=1.22MM UL10002		BLACK	
A5	B5	1X22AWG DISC SR-PVC BK OD=1.22MM UL10002		BLACK	
A6	B6	1X22AWG DISC SR-PVC BK OD=1.22MM UL10002		BLACK	
A7	B7	1X22AWG DISC SR-PVC BK OD=1.22MM UL10002		BLACK	
A8	B8	1X22AWG DISC SR-PVC BK OD=1.22MM UL10002		BLACK	
A9	B9	1X22AWG DISC SR-PVC BK OD=1.22MM UL10002		BLACK	
A10	B10	1X22AWG DISC SR-PVC BK OD=1.22MM UL10002		BLACK	

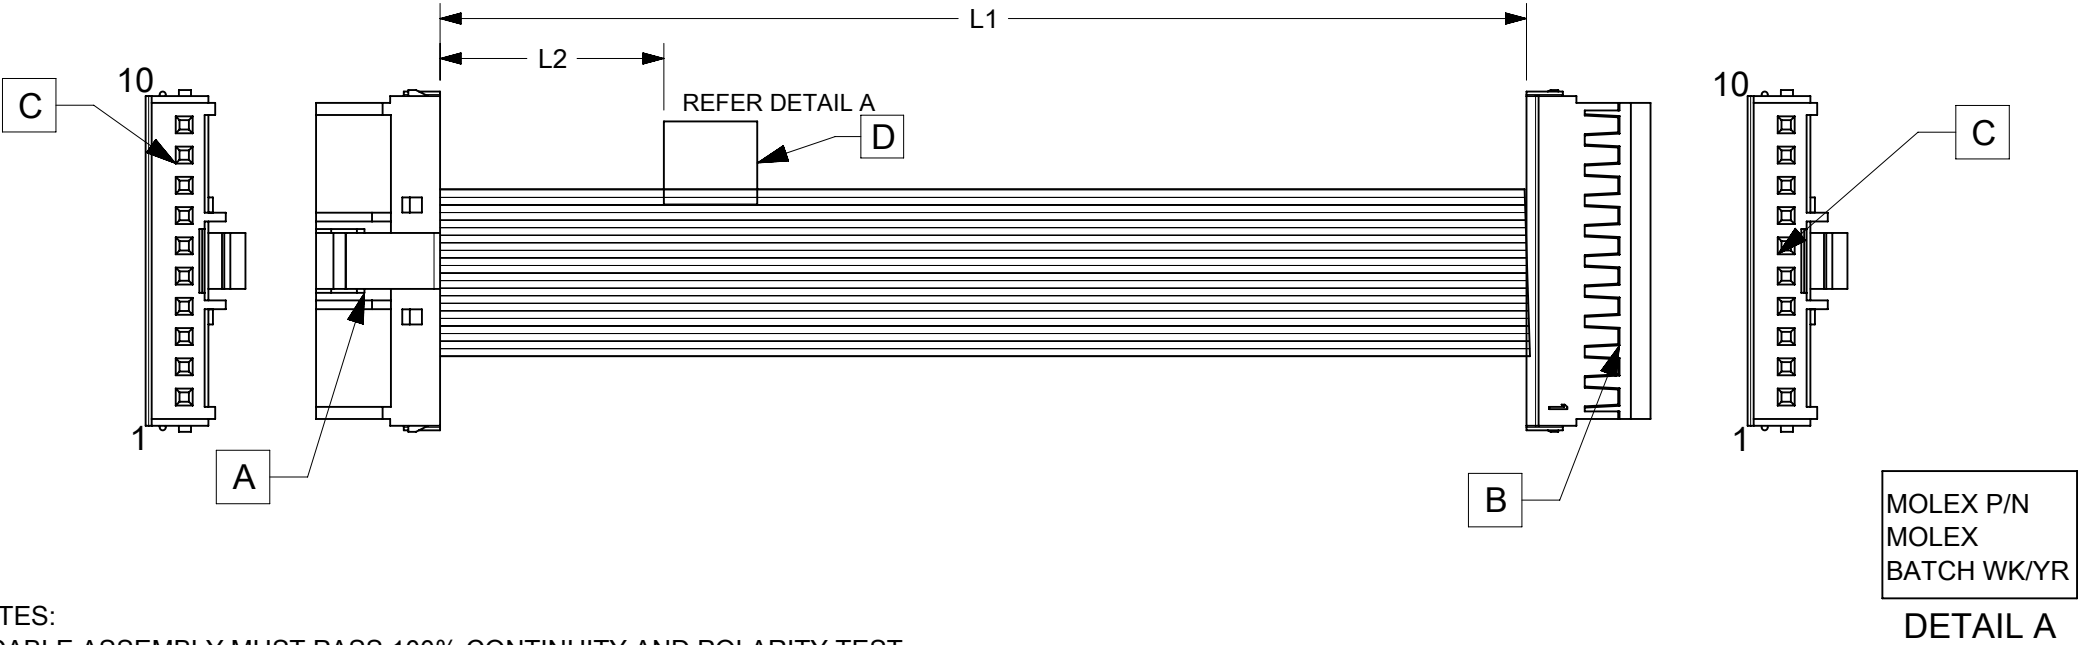

- NOTES:
1. CABLE ASSEMBLY MUST PASS 100% CONTINUITY AND POLARITY TEST.
 2. CONNECTOR VIEW SHOWN FROM MATING SIDE.
 - 3.LABEL TEXT MUST BE 2 MM MAX. IN HEIGHT WITH ARIAL FONT.
 - 4.LABEL MUST BE WRAPPED IN FLAG TYPE ON A SINGLE CABLE.

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2023/01/04	A	INITIAL RELEASE	THANUB
DOCUMENT STATUS	P1	RELEASE DATE	2023/02/08 09:35:32

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
	DIMENSION UNITS	SCALE
	mm	NTS
	GENERAL TOLERANCES (UNLESS SPECIFIED)	
DIVISIONAL SYMBOLS	ANGULAR TOL	± °
	4 PLACES	±
	3 PLACES	±
	2 PLACES	±
	1 PLACE	±
	0 PLACES	±
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION
	DRAWING	SERIES
A4-SIZE		224482
MATERIAL NUMBER		CUSTOMER
SEE TABLE		GENERAL MARKET
SHEET NUMBER		1 OF 1