


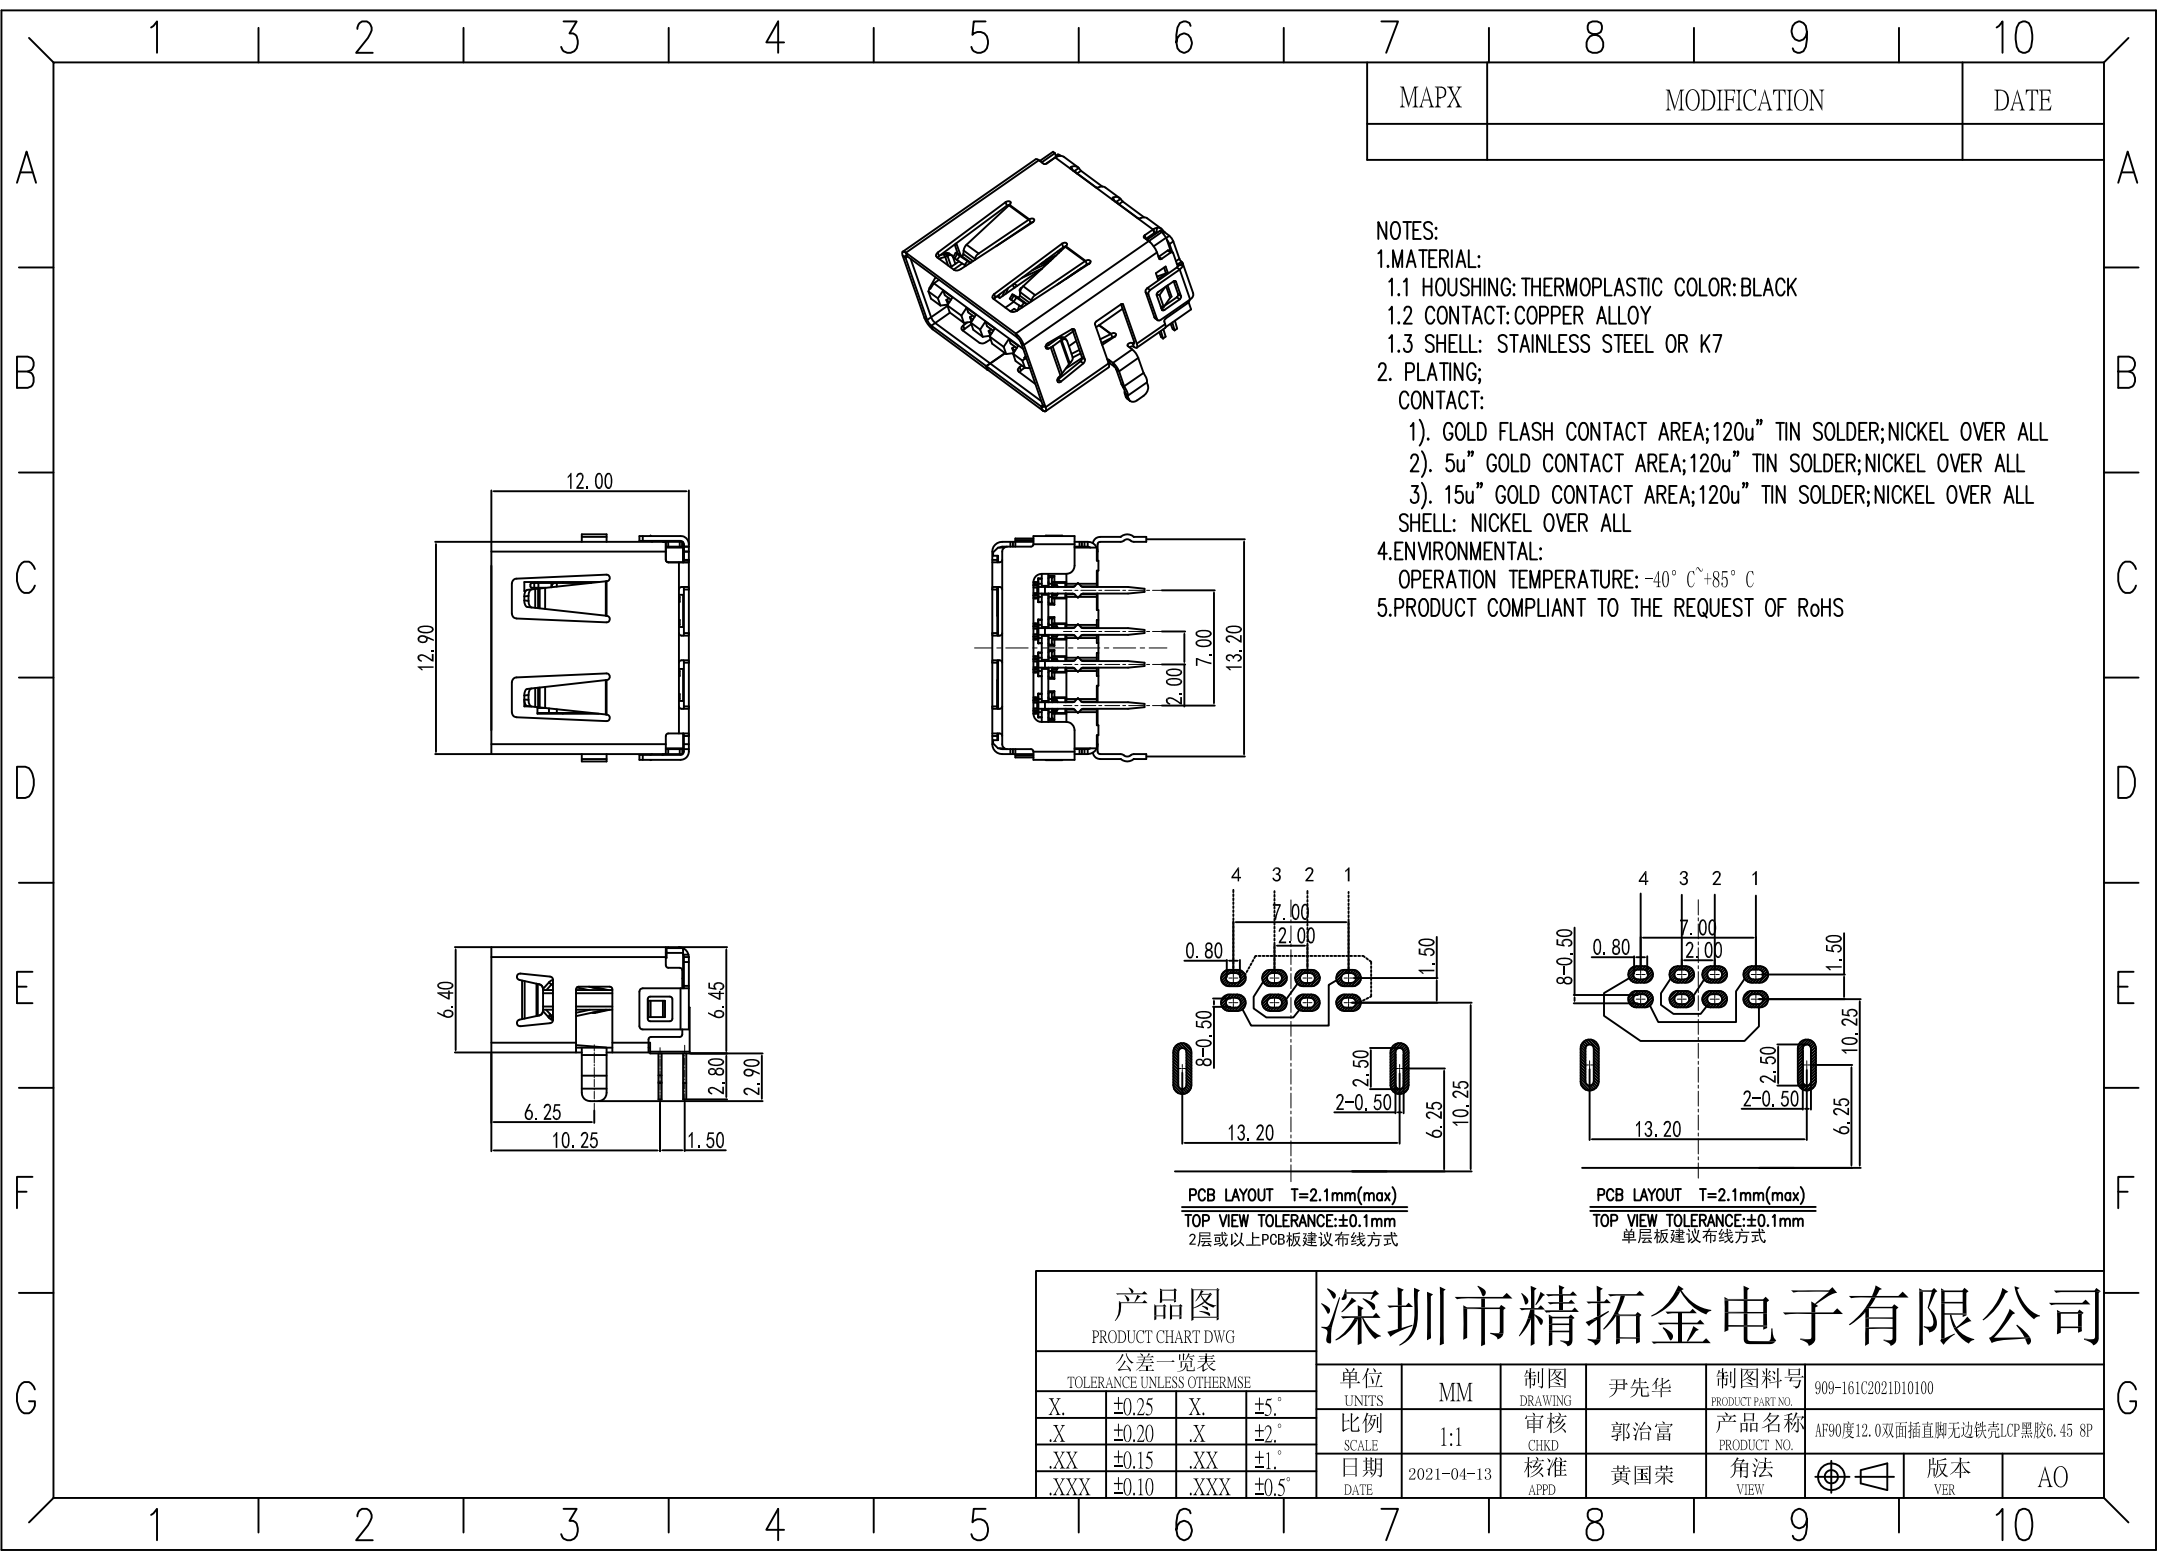

NOTES:

1.MATERIAL:

1.1 HOUSHING: THERMOPLASTIC COLOR:BLACK

1.2 CONTACT: COPPER ALLOY

1.3 SHELL: STAINLESS STEEL OR K7

2. PLATING;

CONTACT:

1). GOLD FLASH CONTACT AREA;120u" TIN SOLDER;NICKEL OVER ALL

2). 5u" GOLD CONTACT AREA;120u" TIN SOLDER;NICKEL OVER ALL

3). 15u" GOLD CONTACT AREA;120u" TIN SOLDER;NICKEL OVER ALL

SHELL: NICKEL OVER ALL

4.ENVIRONMENTAL:

OPERATION TEMPERATURE: -40° C~+85° C

5.PRODUCT COMPLIANT TO THE REQUEST OF RoHS

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	±0.25	X.	±5°
.X	±0.20	.X	±2°
.XX	±0.15	.XX	±1°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	尹先华	制图料号 PRODUCT PART NO.	909-161C2021D10100
比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	AF90度12.0双面插直脚无边铁壳LCP黑胶6.45 8P
日期 DATE	2021-04-13	核准 APPD	黄国荣	角法 VIEW	版本 VER
					AO