

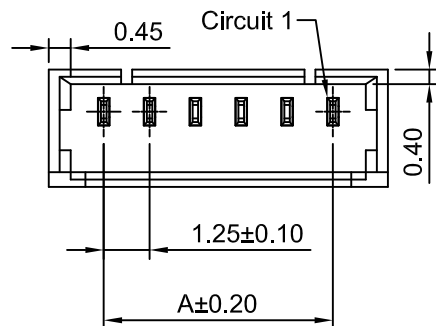


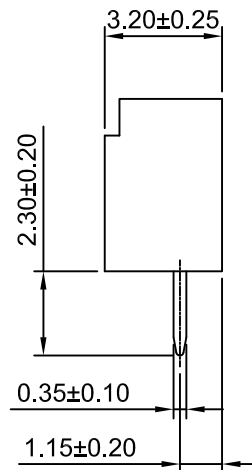


2P~3P

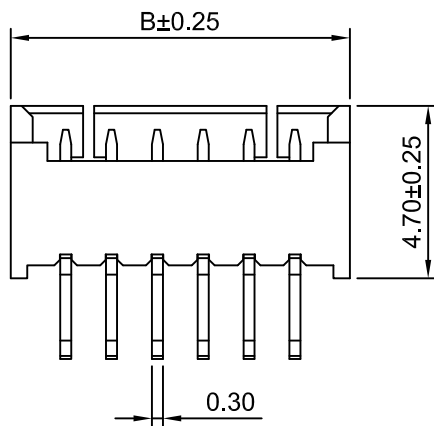

4P~20P

Ordering Information:

A1251WV-XP - $\frac{46}{1} - \frac{*}{2 \ 3}$

1.Part NO.


2.Material:

46: Nylon 46,UL94V-0(Ivory)

3.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel



SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Phosphor Bronze

Material: Nylon 46,UL94V-0(Ivory)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A1251WV-2P-46	1.25	4.30
A1251WV-3P-46	2.50	5.55
A1251WV-4P-46	3.75	6.80
A1251WV-5P-46	5.00	8.05
A1251WV-6P-46	6.25	9.30
A1251WV-7P-46	7.50	10.55
A1251WV-8P-46	8.75	11.80
A1251WV-9P-46	10.00	13.05
A1251WV-10P-46	11.25	14.30
A1251WV-11P-46	12.50	15.55
A1251WV-12P-46	13.75	16.80
A1251WV-13P-46	15.00	18.05
A1251WV-14P-46	16.25	19.30
A1251WV-15P-46	17.50	20.55
A1251WV-16P-46	18.75	21.80
A1251WV-17P-46	20.00	23.05
A1251WV-18P-46	21.25	24.30
A1251WV-19P-46	22.50	25.55
A1251WV-20P-46	23.75	26.80

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

A4	CHANGE THE DRAWING	2021.09.17
A3	CHANGE THE DRAWING	2020.12.25
A2	CHANGE THE DRAW NO.	2018.12.06
A1	CHANGE THE DRAWING	2017.12.23
A0	NEW RELEASE	2013.01.21
REV	DESCRIPTION	DATE

Unit	Scale	Sheet
mm	5:1	1 of 1
DRWN	CHK'D	APPR
Dengchun Yi	Diankui Wan	Jack Yin
General Tolerances		THIRD ANGLE PROJECTION
x,xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°		

TITLE		
1.25mm PITCH VERTICAL HEADER		
DRAWING NO.		REV
A1251WV-XP-46		A4