




Style 1



Style 2

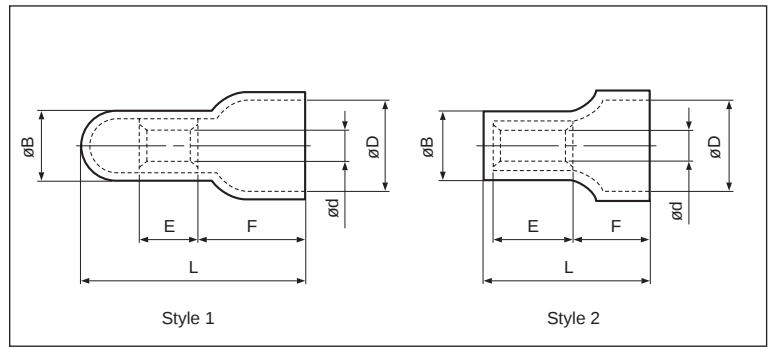

Certificate No.: E42024 LR20812 JQ0607003

Applicable Wire		Part No.	Standard	Style	Dimensions mm (in.)						Insulation Material	Tool No.								Qty/box	
AWG#	Wires Cross Section (mm²) (total)				L	F	E	ø d	ø B	ø D		YS-2622	YS-2216	YS-1614	YS-1210	YS-8S	YA-1	YA-2	YA-4		BCT-0514L
22 to 16	(0.5 to 1.75)	CE1(CE-100)	  	1	20.8 (.819)	9.5 (.374)	7.0 (.276)	2.4 (.094)	5.0 (.197)	6.5 (.256)	Nylon		0				0	0	0	0	1,000
16 to 14	(1.0 to 3.0)	CE2(CE-230)			21.0 (.827)	9.5 (.374)	7.3 (.287)	3.0 (.118)	5.7 (.224)	8.0 (.315)				0			0	0	0	0	1,000
12 to 10	(2.5 to 6.0)	CE5(CE-550)			27.0(1.063)	12.0 (.472)	8.5 (.335)	3.8 (.150)	7.2 (.283)	9.5 (.374)					0		0	0	0	0	500
8	(4.0 to 9.0)	CE8(CE-800)			28.0(1.102)	12.0 (.472)	9.5 (.374)	4.5 (.177)	9.3 (.366)	12.0 (.472)						0		0	0	0	250
16 to 14	(1.5 to 3.0)	2-SDW	 	1	17.1 (.673)	7.6 (.299)	7.0 (.276)	2.7 (.106)	5.8 (.228)	8.2 (.323)				0			0	0	0	0	1,000
26 to 22	(0.2 to 0.6)	0.5-SD			9.7 (.382)	4.1 (.161)	4.0 (.157)	1.2 (.047)	3.5 (.138)	4.3 (.169)		0					0				5,000
22 to 16	(1.0 to 1.75)	1-SD	 	2	15.2 (.598)	5.9 (.232)	8.0 (.315)	2.2 (.087)	5.0 (.197)	6.2 (.244)			0				0	0	0	0	1,000
16 to 14	(1.0 to 2.5)	2-SD			15.2 (.598)	5.9 (.232)	8.0 (.315)	2.5 (.098)	5.85(.230)	6.5 (.256)				0			0	0	0	0	1,000
12 to 10	(2.0 to 5.5)	5.5-SD			17.8 (.701)	8.0 (.315)	8.5 (.335)	3.5 (.138)	7.35(.289)	9.4 (.370)					0		0	0	0	0	500
8	(4.0 to 9.0)	8-SD			22.2 (.874)	10.2 (.402)	9.5 (.374)	4.6 (.181)	9.3 (.366)	12.0 (.472)						0		0	0	0	250

Note: 1) Products with the JIS mark conform to JIS C2807.

2) "Applicable Wires" indicates the total cross-sectional area.

3) Part numbers inside parentheses are the former part numbers.

4) Part numbers 1-SD and 2-SD are CSA certified with a rating of 300V; all other models are certified with a rating of 600V.

5) Delivery lead times may vary depending on the product. Contact JST for details.

Wire combination table for closed-end splices specified by UL

AWG#	↓Number of wires																												CE1(CE-100), 1-SD											
22	5	4	4	3	3	3	2	2	2	2	1	1	1	1	1																									
20		1		1			2	1			2	1	1			3	2	2	1	1																				
18					1				1			1		1		1			1		2																			
16														1						1																				
AWG#	↓Number of wires																												CE2(CE-230)											
22	7 to 2	5	5	5	5	4	4	4	4	4	4	4	4	3	3	3	3	3	3	3	3	3	3	3	2	2	2	2	2											
20		3 to 1	1			4 to 1	2	1	1				4 to 1	3	2	2	1	1						5 to 1	3	3	2	2												
18			1	2, 1			1	2, 1		2, 1	1			1	1		2, 1		3 to 1	1					1		2, 1													
16					1				1		1	1				1		1		1	2, 1					1		1												
14													1										1																	
22	2	2	2	2	2	2	2	2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1														
20	1	1	1	1					6 to 1	4	3	3	2	2	2	2	1	1	1							6 to 2	5	4												
18	2, 1	1			3 to 1	1				1	1		2, 1	1		3 to 1	1		3 to 1	2	1	1					1	1												
16		1	1			1	2, 1					1		1	1		1	1			1	1			2, 1															
14				1				1	1										1					1		1	1													
22																																								
20	4	3	3	2	2	2	2	1	1	1	1	1	1																											
18		2, 1		2, 1	1			3 to 1	2	1	1			4 to 2	2	1	1																							
16	1		1		1	2, 1			1	1		2, 1		1	2, 1		2																							
14							1				1		1			1																								
AWG#	↓Number of wires																												2-SD, 2-SDW											
22	7 to 2	5	5	4	4	4	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	1	1	1	1	1	1	1											
20		1		2, 1			3 to 1	2	2	1	1		4 to 1	2	1	1				4 to 1	3	2	2	1	1															
18			1		1			1		2, 1		2, 1		1	2, 1		2, 1	1			1	1		2, 1		3 to 1	1													
16						1			1		1		1				1		1	1				1		1		1												
14																																								
22	1	1																																						
20			5 to 2	4	4	3	3	2	2	2	1	1	1	1																										
18				1		1		2, 1	1		3 to 1	1		3, 2	2	1																								
16	1				1		1		1	1		1	2, 1		1	1																								
14		1											1																											
AWG#	↓Number of wires																												5.5-SD											
22	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1												
20	4	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	1	1	1	1	1	1												
18			1			4 to 1	3	2	2	2	1	1	1	1						5 to 2	4	4	3	3	2	2	2	2												
16			1				1	1			2, 1	1		3 to 1	1	1					1		2, 1		2, 1	1														
14				1					1			1	2, 1			1		2, 1				1		1		1	1													
12					1					1				1			1																							
10																				1																				
22	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1												
20	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1												
18	2	1	1	1	1	1	1	1	1					4 to 2	3	3	3	2	2	2	2	2	2	2	2	2	2	2												
16		3 to 1	1	1	1			3 to 1	2	1	1				2, 1			2, 1	1			2	2, 1	1	1															
14			1			1				1	2, 1		2, 1						1			1	1			1														
12	1			1			1					1		1					1					1	1		1													
10					1			1	1						1	1																								
22	1	1	1	1	1	1	1	1																																
20								5	4	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2												
18	1	1								1				4 to 1	3	2	2	2	1	1	1																			
16			3, 2	2	2	1	1				1				1	1			2, 1	1			3 to 1	1	1															
14				1		1		2				1					1			1	2, 1				1	2, 1														
12	1				1		1						1					1							1		1													
10		1																																						
22																																								
20	2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1															
18		5 to 2	4	4	3	3	2	2	2	2	1	1	1	1	1	1	1	1						5 to 2	4	3	3													
16			1		2, 1		2, 1	1			3 to 1	1	1	1			3 to 1	2	1	1					1															
14				1		1		1	1			1			1			1	2, 1		3 to 1					2, 1														
12									1			1			1						1						1													
10	1													1			1							1																
22																																								
20																																								
18	2	2	2	2	1	1	1	1	1	1	1																													
16	2, 1	1			2	2, 1	1	1			3, 2	2	2	1	1																									
14		1	1				1		2, 1			2, 1		1		2																								
12				1	1			1		1				1		1																								
10											1																													

Note: 1) The wires indicated in the table, with the exception of AWG #10, are applicable to both stranded wire and solid wire. AWG #10 is limited to stranded wire only.

2) The combinations indicated in the table conform to UL standards only.

3) (ex. For the closed-end splice CE8, UL specifies the following combinations; 3 pcs. AWG #20 + 1 pc. AWG #12, 3 pcs. AWG #20 + 1 pc. AWG #10, 2 pcs. AWG #20 + 1 pc. AWG #18 + 1 pc. AWG #12,...)

Wire combination table for closed-end splices specified by UL

AWG#	↓ Number of wires																												CE5(CE-550/CE-550V)																											
22	8	5	5	5	3, 2	3	3	2	2	2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1																										
20		2									4	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2																										
18			3			2		2			1				4 to 1	3	2	2	2	2	1	1	1	1																																
16				2	2		1		3			1				1	1			2, 1	1			2, 1	1	1																														
14							1							1				1			2, 1			2, 1		1		3 to 1																												
12															1				1					1			1			1																										
10																																																								
22	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1																										
20	2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1																										
18		5 to 2	4	4	3	3	2	2	2	2	2	1	1	1	1	1	1									1																														
16			1		2, 1		2, 1	1			3 to 1	1	1			3 to 1	2	1	1						2	3 to 1	2	2	1																											
14				1		1		1	1			1		1			1	2, 1		2, 1							1																													
12										1			1		1					1			1					1																												
10	1															1								1					1																											
22	1	1	1	1																																																				
20					6	5	4	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2																										
18					2			2	1						4 to 1	3	2	2	2	2	1	1	1	1																																
16	1									1						1	2, 1	1		2, 1	1			4 to 1	2	1	1																													
14		2, 1									1						1	1			1	2, 1		2, 1		1	2, 1		2, 1																											
12	1		1									1							1					1				1																												
10				1										1						1				1					1																											
22																																																								
20	2	2	2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1																										
18				5 to 2	4	4	3	3	2	2	2	2	2	1	1	1	1	1	1	1	1	1	1	1				6 to 2	4																											
16					1		2, 1		2, 1	1			3 to 1	1	1	1			3 to 1	2	1	1																																		
14	1					1		1			1	1					2, 1				1	2, 1		3 to 1																																
12	1	1										1			1			1					1			1																														
10			1													1				1	1						1																													
22																																																								
20																																																								
18	3	3	3	2	2	2	2	2	2	2	2	1	1	1	1	1	1	1	1																																					
16	2, 1			2, 1	1	1	1				3 to 1	2	2	1	1			4 to 2	3	2	2	1	1	1																																
14		1			1			2, 1				1	2, 1		2, 1				1	2, 1		2, 1			3, 2	1	1																													
12			1			1			1					1		1					1				1			1																												
10							1			1								1								1				1																										
AWG#	↓ Number of wires																												CE8(CE-800), 8-SD																											
20	3	3	2	2	2	2	1	1	1	1	1	1	1	1	1	1	1	1	1																																					
18			1				2	2	2	1	1	1									3	3	3	2	2	2	2	2	2	2																										
16				1						1			3, 1	2	1	1								2, 1	1																															
14				1	2		1			1				1	2		3, 2	1			2, 1				2																															
12	1		1					1			1							1	1			1				1		1																												
10		1				1			1			1					1				1			1						1																										
20																																																								
18	1	1	1	1	1	1	1	1																																																
16	3	2	1	1	1				4, 3	3	2	2	2	1	1	1	1																																							
14		1	2, 1			3 to 1				1	2, 1			3, 2	1			4, 3	2	1	1																																			
12				1			2, 1					1			1				1	1		2	1																																	
10					1			1					1		1		1			1	1		1																																	

Note: 1) The wires indicated in the table, with the exception of AWG #10, are applicable to both stranded wire and solid wire. AWG #10 is limited to stranded wire only.

2) The combinations indicated in the table conform to UL standards only.

3) (ex. For the closed-end splice CE8, UL specifies the following combinations; 3 pcs. AWG #20 + 1 pc. AWG #12, 3 pcs. AWG #20 + 1 pc. AWG #10, 2 pcs. AWG #20 + 1 pc. AWG #18 + 1 pc. AWG #12,...)