




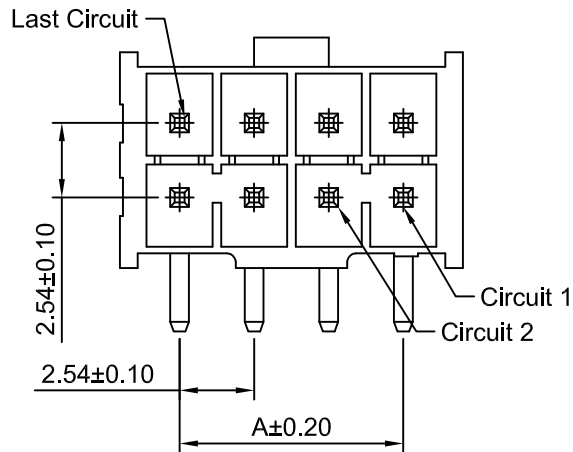


2x3P~2x25P

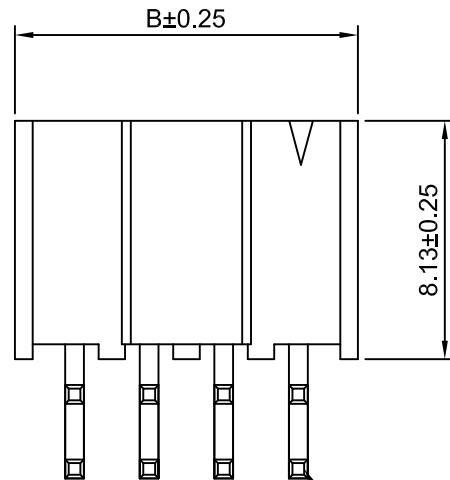

PIN 0.64 SQ




2x2P

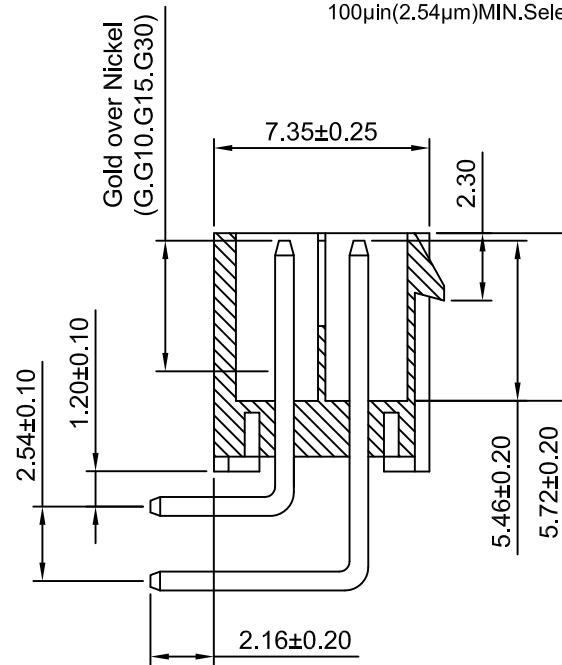

Ordering Information:
A2549WRI-2xXP-K - *** - ** - ***
1 2 3 4

- Part No.
- Material:
(Blank):LCP,UL94V-0
GWT:LCP,UL94V-0,GWT 750°C
- Color:
(Blank):Ivory
BK:Black
WH:White
BE:Beige
- Finish:
(blank):Tin over Nickel
G:1µin(0.025µm)MIN.Select Gold
100µin(2.54µm)MIN.Select Tin
G10:10µin(0.25µm)MIN.Select Gold
100µin(2.54µm)MIN.Select Tin
G15:15µin(0.38µm)MIN.Select Gold
100µin(2.54µm)MIN.Select Tin
G30:30µin(0.76µm)MIN.Select Gold
100µin(2.54µm)MIN.Select Tin

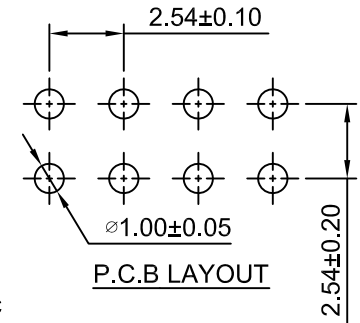

P.C.B LAYOUT

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass/Tin over Nickel
Material: LCP,UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	2.54	6.60	2x14P	33.02	37.08
2x3P	5.08	9.14	2x15P	35.56	39.62
2x4P	7.62	11.68	2x16P	38.10	42.16
2x5P	10.16	14.22	2x17P	40.64	44.70
2x6P	12.70	16.76	2x18P	43.18	47.24
2x7P	15.24	19.30	2x19P	45.72	49.78
2x8P	17.78	21.84	2x20P	48.26	52.32
2x9P	20.32	24.38	2x21P	50.80	54.86
2x10P	22.86	26.92	2x22P	53.34	57.40
2x11P	25.40	29.46	2x23P	55.88	59.94
2x12P	27.94	32.00	2x24P	58.42	62.48
2x13P	30.48	34.54	2x25P	60.96	65.02

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1
Draw By:		Approved :
Dlankul Wan		Jack Yln

Title :

2.54mm Pitch

90° Dual Row Wafer

A2	CHANGE THE INFORMATION	2019.04.24
A1	CHANGE THE COLOR	2018.11.29
A0	NEW RELEASE	2018.03.19
REV	DESCRIPTION	DATE

General Tolerance	
x.xx±0.25	PROJECT
x.xx±0.20	
x.xxx±0.15	

DRAW NO : A2549WRI-2xXP-K	REV A2
---------------------------	--------