




1	2	3	4	5	6	7	8
REV.	ECN NO.	DATE	SIGN	DESCRIPTION			

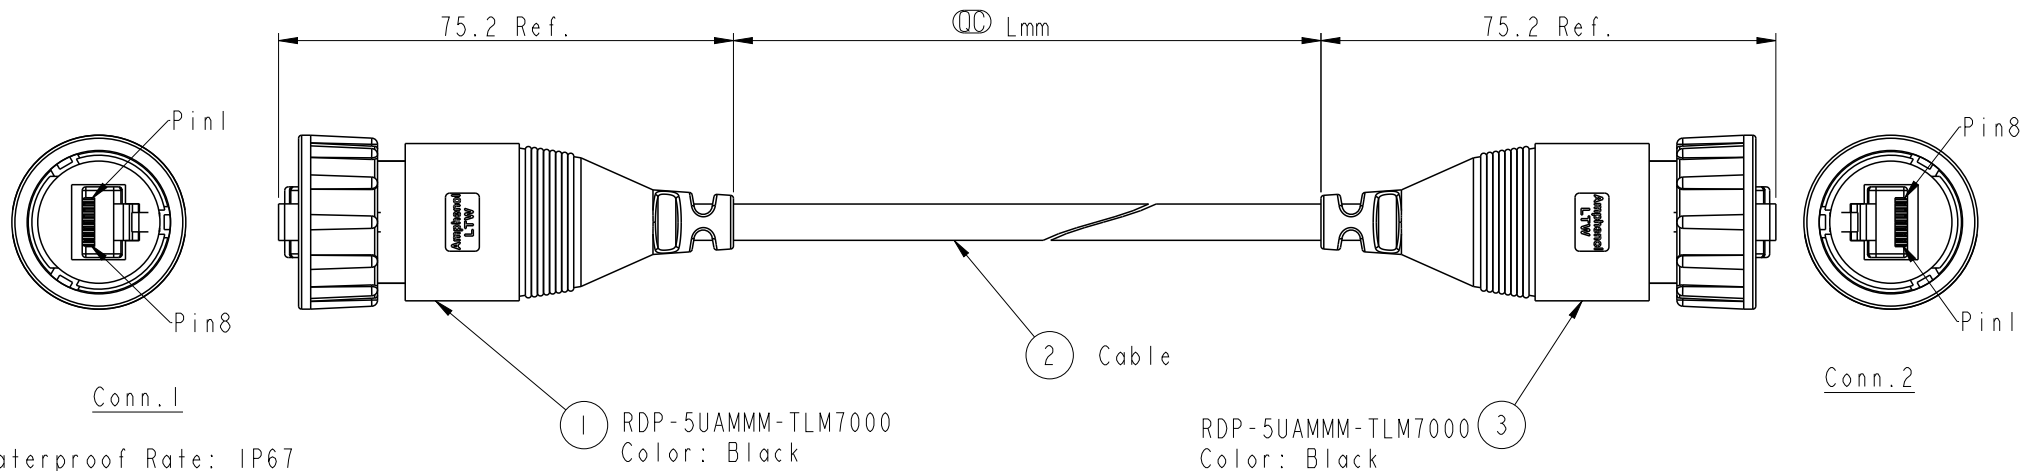

RDP5UM-RDP5UM-TL7A XX
XX : 01~99Meters
01 : 01Meter
02 : 02Meters

99 : 99Meters

Cable Length(L):01~99Meters

Note:

- * ① Important Dimension To Check
- * Waterproof Rate: IP67
- * Housing: Nylon+GF, Black
- * Lock Nut: Nylon+GF, Black
- * RJ Plug: Unshield, Phosphor Bronze, Gold Plated
- * Cable: NOUL, CAT5E UTP 24#*4P, OD6.0, BK
- * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
11M~30M:±200mm
31M~99M:±500mm

8	Brown	棕	8
7	Brown/White	棕/白	7
6	Green	綠	6
5	Blue/White	藍/白	5
4	Blue	藍	4
3	Green/White	綠/白	3
2	Orange	橙	2
1	Orange/White	橙/白	1
Conn.1	Wire Color		Conn.2
	Pin Out		

UNIT:mm		TITLE RJ DOUBLE-ENDED, WITH CONN	
TOLERANCE	±0.25 XX ±0.1 XXX ±0.05 ANGLES ±1°	SCALE 4:5	SIZE A4
REV.	A	WC-REV.	A.4
① Inspection item			

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Raison_liao	DATE 2013-09-27
DWG NO RDP5UM-RDP5UM-TL7AXX	CHECKED BY Tony	DATE 2013-09-27
CUSTOMER ALTW	APPROVED BY Victor	DATE 2013-09-27