



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN13B0140~43	2013/08/09	Cary	Change Logo To Amphenol

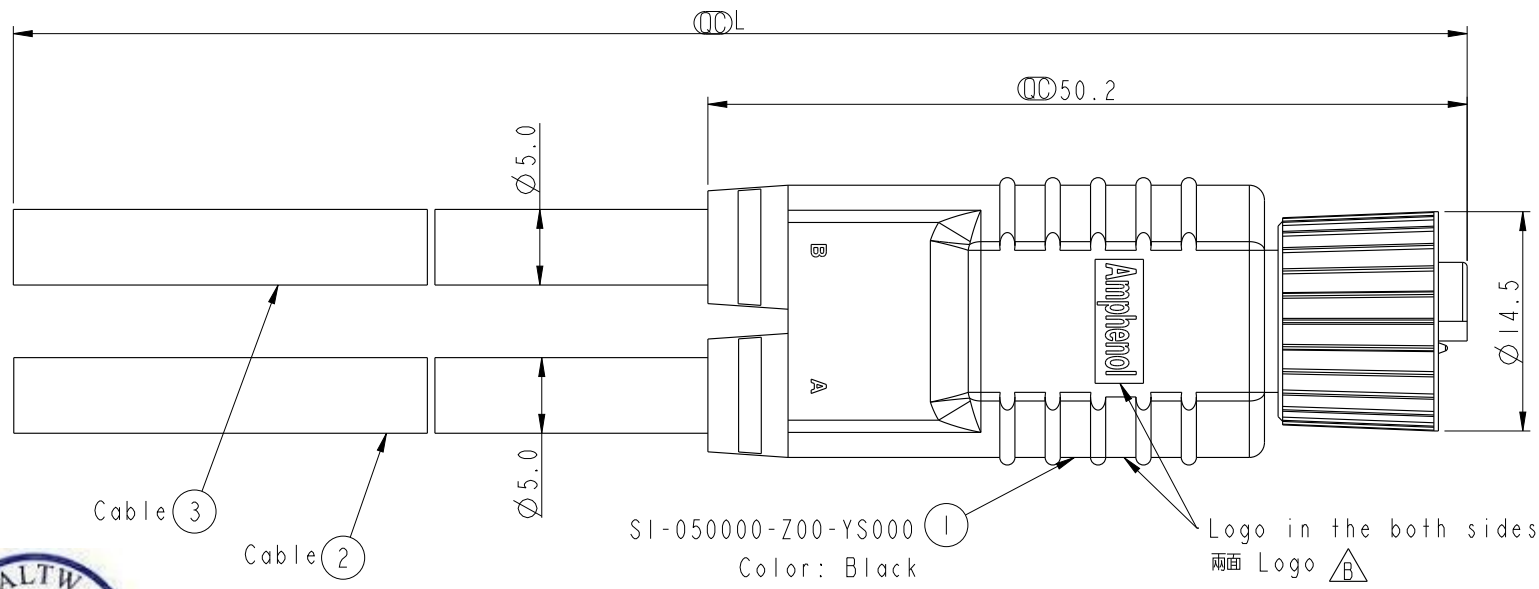

Pin Assignments
Front View

5	Green	Green
4	White	White
3	Brown	Brown
2	Blue	Blue
1	Black	Black
	A	B
Conn.	Wire Color	
	Pin Out	

SI-050000-Z00-YSBXX
XX:01~99Meters
01:01Meter
02:02Meters
...
99:99Meters
Cable Length(L):01~99Meters

- Note:
- * $\varnothing$ Important Dimension To Check.
 - * Waterproof Rate:IP68
IP68:1M Depth Of Water In 24hours.
 - * Housing:PU,Black
 - * Pin: Copper Alloy,Gold Plated
 - * Cable:Black, 22AWG*5C+TALCUM
OD=5.0mm
 - * Cable Length Tolerance:01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm		TITLE							
TOLERANCE ±0.5mm		M12 I Style Cable Screw 5Pin F Conn. C Pin							
		SCALE	2:1	SIZE	A4	SHEET	1	OF	1
		REV.	B	WC-REV.	A.2	QC: Inspection item			

Amphenol LTW		ITEM NO	DRAWN BY		DATE
安費諾亮泰企業股份有限公司		DWG NO	Cary_liu		2013-08-09
		CUSTOMER	CHECKED BY		DATE
		ALTW	Mafei		2013-08-09
			APPROVED BY		DATE
			Victor		2013-08-09