




Connectors > PCB Connectors > Backplane Connectors > High Speed Backplane Connectors

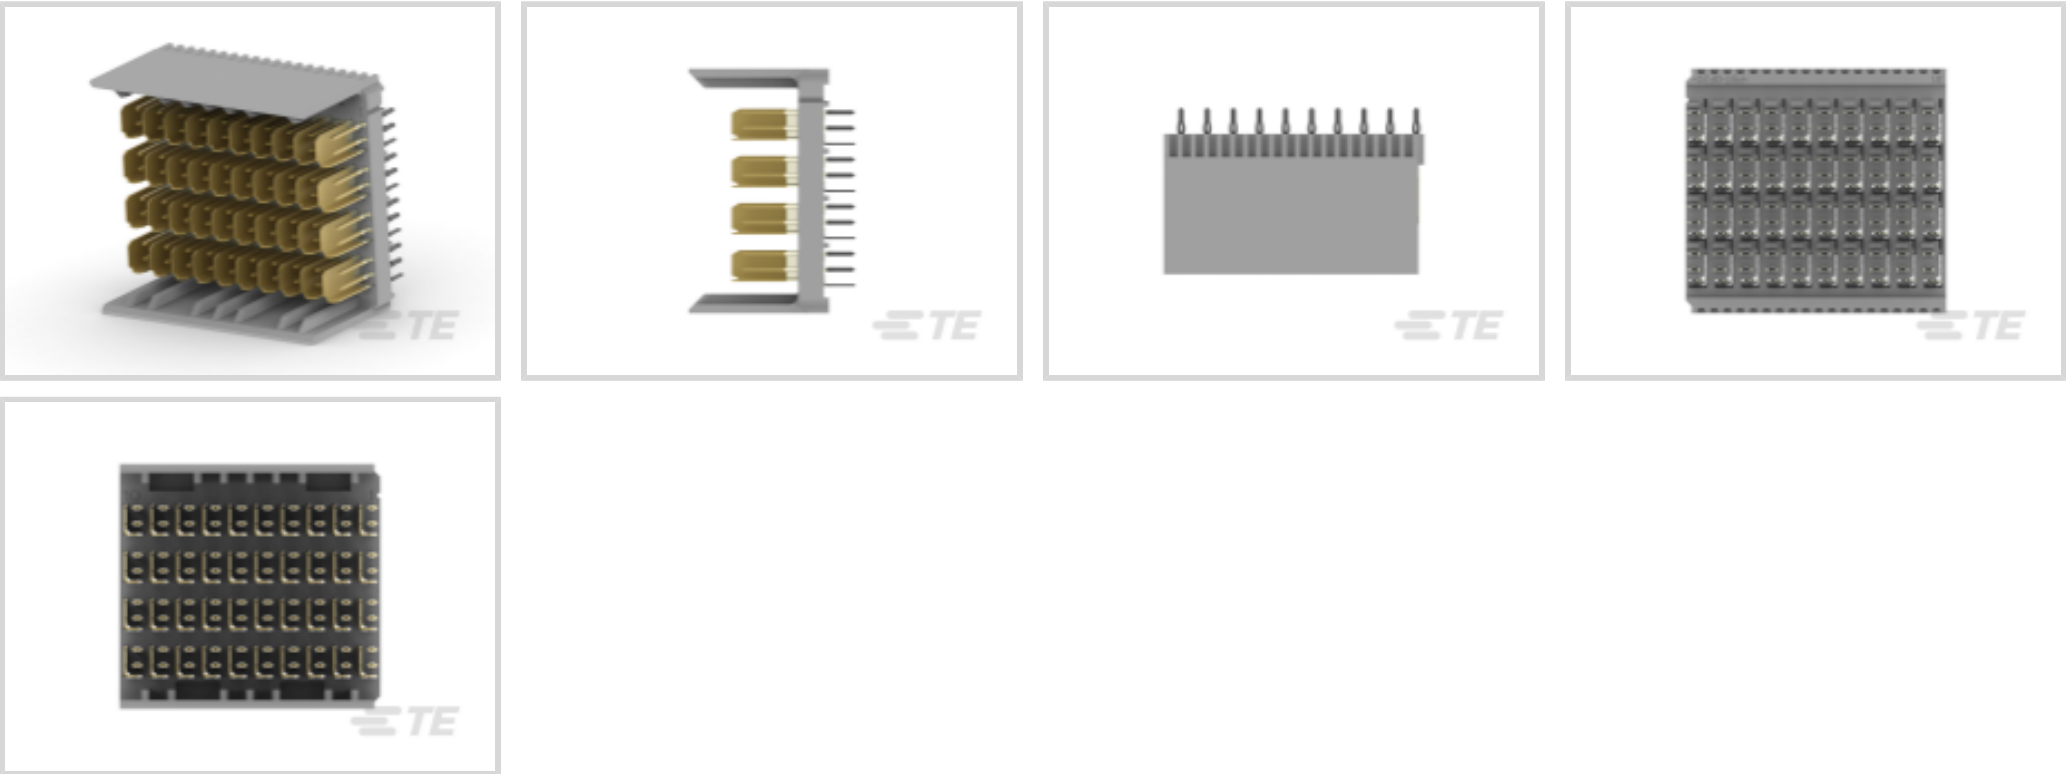

Number of Positions: 80
Row-to-Row Spacing: 1.5 mm [.059 in]
Mating Alignment: With
Mating Alignment Type: Guide Lugs
Number of Rows: 8

Features

Product Type Features

Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board
PCB Connector Assembly Type	PCB Mount Header
Shroud Style	Partially Shrouded

Configuration Features

Pairs per Column	4
Number of Ground Positions	40
Card Slot Centerline	25.4 mm[1 in]
Number of Pairs	40
Number of Signal Positions	80
Number of Positions	80
Number of Rows	8
Number of Columns	10
PCB Mount Orientation	Vertical



Guide Location

Unguided

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------

Signal Characteristics

Data Rate	≤12 Gb/s
-----------	----------

Body Features

Shield Material	Phosphor Bronze
Primary Product Color	Gray

Contact Features

Contact Mating Area Length	5.3 mm[.21 in]
Contact Layout	Matrix
Contact Type	Pin
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
Contact Mating Area Plating Material	Gold
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	.7 A

Termination Features

Termination Post & Tail Length	2.5 mm[.098 in]
Termination Method to PCB	Through Hole - Press-Fit

Mechanical Attachment

Mating Alignment	With
Mating Alignment Type	Guide Lugs
Connector Mounting Type	Board Mount

Housing Features

Number of Shrouded Sides	2
Housing Material	Polyester - GF
Centerline (Pitch)	2.5 mm[.098 in]

Dimensions

Connector Length	24.9 mm[.98 in]
Connector Height	13.4 mm[.527 in]
Connector Width	23.43 mm[.922 in]
Row-to-Row Spacing	1.5 mm[.059 in]



Usage Conditions

Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Method	Tube
------------------	------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Pb (13% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1469362-1
HM-ZD VERT RECPT ASSY 18MM

TE Part # 1469001-1
HM-ZD 4PR RECPT 80P

TE Part # 6469001-1
HM-ZD 4PR RECPT 80P

TE Part # 2065657-1
zd Plus, 4 pair, receptacle assy

TE Part # 91349-1
SEATING TOOL, HMZD HDR, 4 PAIR

TE Part # 1583237-1
TOOL, EXTRACTION, INDIVIDUAL PIN

TE Part # 2227510-1
HM-ZD 4PR RECPT 80P 50Au

Also in the Series | Z-PACK HM-Zd

Hard Metric Backplane Connectors(1)

High Speed Backplane Connectors(46)

Insertion & Extraction Tools(1)

Customers Also Bought

TE Part #3-647609-4
04P MTA100 HDR ASSY F/L LF

TE Part #5745354-4
37 PLUG RA/MS STD

TE Part #2-2176058-8
RLP73K 3A R13 5% 2K RL

TE Part #5-104655-5
40 50/50 HDR DRST SFMNT TIN

TE Part #100526-9
Z-PACK F.CODING KEY

TE Part #2013289-1
SEMI-HARD TRAY DDR3 204P 5.2H STD

TE Part #1761394-1
DUST COVER, SFP, GANGED & STACKED

TE Part #2102771-1
DC, 7Row, Center, MULTIGIG RT 2R



TE Part #9-2363903-1
HD MATEnet 1+6 HDR ASSY, GRP D,
180DEG

Documents

Product Drawings

HM-ZD 4PR HDR 80P 5.2MM

English

CAD Files

Customer View Model

ENG_CVM_CVM_1469002-1_D.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1469002-1_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1469002-1_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Stacking Connectors Quick Reference Guide (English)

English

Product Specifications

Application Specification

English

Instruction Sheets

EXTRACTION TOOL FOR HM-Zd CONN.(HEADER)(TOOL P/N: 1596026-1)

English

Instruction Sheet (non U.S.)

English