



Connectors > PCB Connectors > PCB Headers & Receptacles



PCB Connector Assembly Type: **PCB Mount Receptacle**

PCB Mount Orientation: **Horizontal, Right Angle**

Connector System: **Board-to-Board**

Number of Positions: **8**

Number of Rows: **2**

Features

Product Type Features

Applied Pressure	High, Standard
PCB Connector Assembly Type	PCB Mount Receptacle
Connector System	Board-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Stackable	Yes
PCB Mount Orientation	Horizontal, Right Angle
Number of Positions	8
Number of Rows	2

Electrical Characteristics

Insulation Resistance	5000 MΩ
Operating Voltage	333 VAC

Body Features

Connector Profile	Standard
Primary Product Color	Black

Contact Features

Mating Square Post Dimension	.64 mm[.025 in]
------------------------------	-----------------



PCB Contact Termination Area Plating Material Thickness	3.81 – 7.62 µm[150 – 300 µin]
Contact Shape & Form	Short Point
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Phosphor Bronze
Contact Mating Area Plating Material	Gold
Contact Mating Area Plating Material Thickness	.762 µm[30 µin]
Contact Type	Socket
Contact Current Rating (Max)	2 A

Termination Features

Rectangular Termination Post & Tail Thickness	.2 mm[.008 in]
Rectangular Termination Post & Tail Width	.69 mm[.027 in]
Termination Method to PCB	Surface Mount

Mechanical Attachment

Mating Alignment	Without
PCB Mount Retention	Without
PCB Mount Alignment	Without
Connector Mounting Type	Board Mount

Housing Features

Centerline (Pitch)	2.54 mm[.1 in]
Housing Material	Polyester - GF

Dimensions

Connector Height	6.05 mm[.238 in]
Row-to-Row Spacing	2.54 mm[.1 in]
Stack Height	8.13 mm[.32 in]
PCB Thickness (Recommended)	1.02 mm[.04 in]

Usage Conditions

Housing Temperature Rating	High
Operating Temperature Range	-65 – 125 °C[-85 – 221 °F]

Operation/Application

Solder Process Feature	Board Standoff
Circuit Application	Signal

Industry Standards



Compatible With Approved Standards Products	CSA LR7189, UL E28476
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	400
Packaging Method	Reel

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 87227-4
08 MODII HDR DRST UNSHRD .100

TE Part # 87215-1
08 MODII HDR DRST UNSHRD .100

TE Part # 5-146130-3
08 MODII HDR DRST SFMNT B/A LF

TE Part # 5-146257-4
08 MODII HDR DRST B/A .100CL L

TE Part # 87230-4
08 MODII HDR DRRA UNSHRD .100

TE Part # 1-86479-6
08 MODII HDR DRRA UNSHRD .100

TE Part # 5-146269-4
08 MODII HDR DRST B/A 100 W/HD

TE Part # 5-146261-4
08 MODII HDR DRST B/A .100CL LF

Also in the Series | AMPMODU IV/V

Backplane Connector Housings(1)

Connector Caps & Covers(15)

Connector Contacts(321)

Connector Hardware(13)

Insertion & Extraction Tools(4)

PCB Headers & Receptacles(931)

Rectangular Connector Housings(5)

Standard Rectangular Connectors(7)

Wire-to-Board Connector Assemblies & Housings(436)

Customers Also Bought





TE Part #825440-3
MOD 2 PINHDR 2X03P.



TE Part #6-1676481-4
CPF 0603 2K7 0.1% 25PPM 1K RL



TE Part #1-1879207-1
RN 0603 255K 0.1% 10PPM 5K RL



TE Part #1-2176092-6
RP 2A 0.25W 953R 0.1% 25PPM 1K RL



TE Part #2-1676481-1
CPF 0603 36R 0.1% 25PPM 1K RL




TE Part #6-2176370-4
RQ 0603 1K96 0.1% 10PPM 5K RL



TE Part #2176370-3
RQ 0603 453R 0.1% 10PPM 5K RL



TE Part #244628-E
SMCIDC 12 KV AB VV 7-01 CL * H007
717 PO

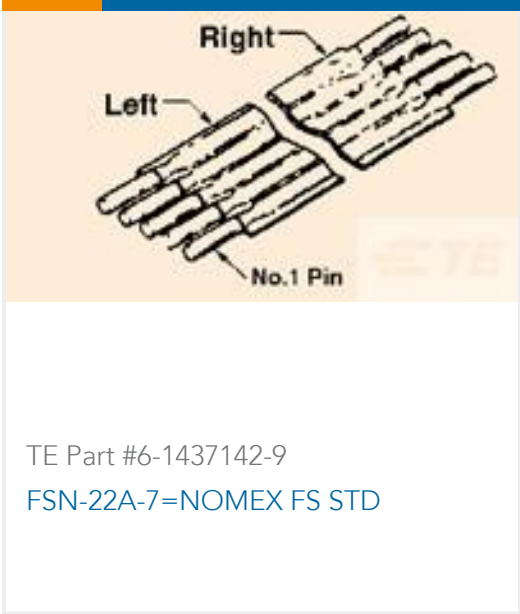

TE Part #6-1437142-9
FSN-22A-7=NOMEX FS STD

Documents

Product Drawings
08 MODII HORZ DR SFMNT 30AU
English

CAD Files
Customer View Model
ENG_CVM_5147722-3_A.3d_igs.zip
English
Customer View Model
ENG_CVM_5147722-3_A.3d_stp.zip
English
Customer View Model
ENG_CVM_5147722-3_A.2d_dxf.zip
English
3D PDF
English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages



AMPMODU_INTERCONNECTION_SYSTEM_SECTION5

English