
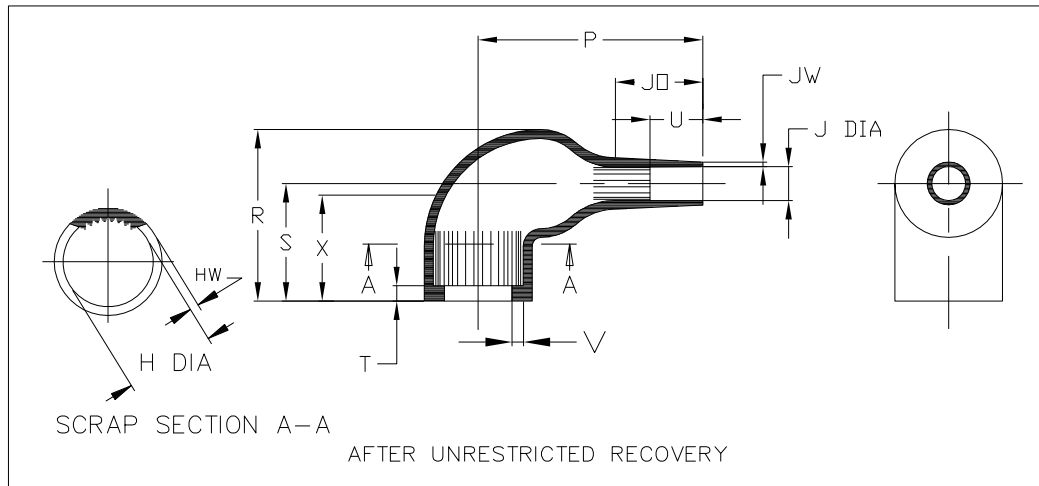


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	1	PRODUCTION ISSUE	24JUN2016	KH	AP

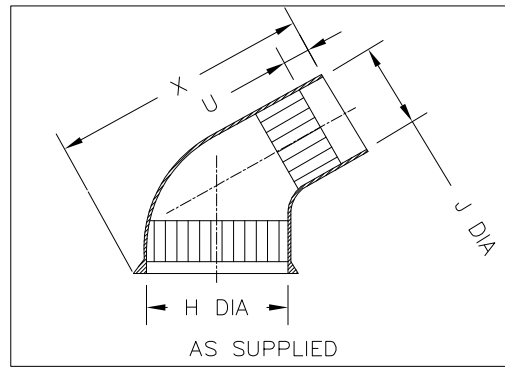

Part No.	H		J		$\pm 10\%$ b	$\pm 10\%$ b	$\pm 10\%$ b	$\pm 10\%$ b	U		$\pm 10\%$ b	$\pm 20\%$ b	$\pm 20\%$ a	$\pm 20\%$ b	$\pm 20\%$ b
	Min	Max	Min	Max					Min	$\pm 10\%$					
	a	b	a	b					a	b					
222S121-100C-0	14 [.55]	10.4 [.41]	10 [.39]	5.0 [.20]	30 [1.18]	25 [.98]	19 [.75]	3.0 [.12]	5.0 [.20]	10 [.39]	1.0 [.04]	15 [.59]	47 [1.85]	1.5 [.06]	1.0 [.04]
222S132-100C-0	20 [.79]	14.2 [.56]	12 [.47]	6.0 [.24]	38 [1.50]	28 [1.10]	20 [.79]	3.0 [.12]	5.0 [.20]	10 [.39]	1.0 [.04]	17 [.67]	57 [2.24]	1.5 [.06]	1.0 [.04]
222S142-100C-0	26 [1.02]	18.0 [.71]	14 [.55]	7.2 [.28]	42 [1.65]	31 [1.22]	21 [.83]	3.0 [.12]	6.0 [.24]	10 [.39]	1.0 [.04]	18 [.71]	64 [2.52]	2.0 [.08]	1.0 [.04]
222S152-100C-0	31 [1.22]	22.4 [.88]	20 [.79]	8.5 [.33]	51 [2.01]	38 [1.50]	26 [1.02]	3.0 [.12]	7.0 [.28]	12 [.47]	1.0 [.04]	20 [.79]	76 [2.99]	2.0 [.08]	1.0 [.04]
222S163-100C-0	38 [1.50]	28.2 [1.11]	24 [.94]	10.0 [.39]	67 [2.64]	45 [1.77]	30 [1.18]	3.0 [.12]	12 [.47]	20 [.79]	1.7 [.07]	28 [1.10]	92 [3.62]	2.2 [.09]	1.5 [.06]
222S174-100C-0	41 [1.61]	35.1 [1.38]	32 [1.26]	15.8 [.62]	80 [3.15]	54 [2.13]	36 [1.42]	3.0 [.12]	12 [.47]	20 [.79]	1.7 [.07]	31 [1.22]	111 [4.37]	3.0 [.12]	1.5 [.06]

DIMENSIONS:
mm [INCHES]

DWN K. HOLAL 24JUN2016

MATERIAL

FINISH

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

CHK N. NAGAR 24JUN2016

APVD A. POOLE 24JUN2016

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

00



TE Connectivity

NAME

RIGHT ANGLED BOOT, COATED

222S1XX-100C-0

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A4

00779

C-222S1XX-100C-0

—

CUSTOMER DRAWING


SCALE

DNS

SHEET

1 OF 2

REV 1



RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

© COPYRIGHT 2017 By TE Connectivity

0 PLC $\pm -$
1 PLC $\pm -$
2 PLC $\pm -$
3 PLC $\pm -$
4 PLC $\pm -$
ANGLES $\pm -$

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—	SEE SHEET 1	—	—	—

COMPATIBILITY CHART

Material Dash No.	Material Description	SPEC No.	Coating Slash No.
-100C	ZEROHALOGEN/SILVER COMPOSITE	RW-3046	/86, /200

ORDERING INFORMATION

222S1**—100C/**—0

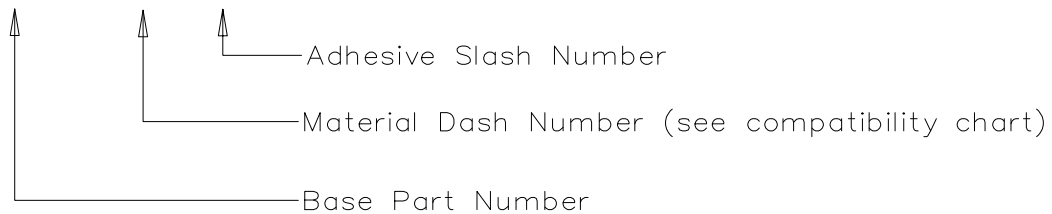

NOTES


- As supplied dimensions are for parts without adhesive, when an adhesive layer is added entry diameters will reduce by 1.5mm Max.
- For method of measuring recovered diameter, see appropriate RW specification (SPEC No.) section 2.2.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

© COPYRIGHT 2017 By TE Connectivity

DIMENSIONS: mm [INCHES]		DWN K. HOLAL 08JUN2016	MATERIAL —		FINISH —	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK N. NAGAR 08JUN2016	 TE Connectivity			
		APVD A. POOLE 08JUN2016				
		0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± —		PRODUCT SPEC —	NAME RIGHT ANGLED BOOT, COATED 222S1XX—100C—0	
		APPLICATION SPEC —	SIZE A4	CAGE CODE 00779	DRAWING NO C-222S1XX—100C—0	RESTRICTED TO —
		WEIGHT 00	CUSTOMER DRAWING			
			SCALE DNS	SHEET 2	OF 2	REV 1