

EV-T2M4CC-DC60A-5,0M16ESBK00 - DC charging cable



1627124

<https://www.phoenixcontact.com/us/products/1627124>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



CHARX connect, DC charging cable, with vehicle charging connector and open cable end, for charging electric vehicles (EV) with direct current (DC), CCS type 2, IEC 62196-3, housing: black, gray, PHOENIX CONTACT logo, cable: 5 m, black

Product description

DC charging cable with vehicle charging connector and free cable end for fast charging of electric vehicles (EV) with direct current (DC) via CCS type 2 vehicle charging inlets, for installation at charging stations for e-mobility (EVSE)

Your advantages

- Consistent design of all Phoenix Contact Vehicle Connectors and Infrastructure Plugs
- Silver-plated surface of the power and signal contacts
- Developed and produced in accordance with the IATF 16949 automotive standard and ISO 9001
- Convenient handling, thanks to the ergonomic handle and additional, rubber grip components
- Integrated temperature sensors for monitoring the temperature at the power contacts

Commercial data

Item number	1627124
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	EM01
Product key	XWBAAD
Catalog page	Page 738 (C-2-2017)
GTIN	4055626300139
Weight per piece (including packing)	4.404 kg
Weight per piece (excluding packing)	4.3 kg
Customs tariff number	85444290
Country of origin	DE

EV-T2M4CC-DC60A-5,0M16ESBK00 - DC charging cable



1627124

<https://www.phoenixcontact.com/us/products/1627124>

Technical data

Product properties

Product type	DC charging cable
Product family	CHARX connect
Application	for charging electric vehicles (EV) with direct current (DC)
	for installation at charging stations for electromobility (EVSE)
	Combined Charging System
Type	DC charging cable
	with vehicle charging connector and open cable end
Affixed logo	PHOENIX CONTACT logo
Charging standard	CCS type 2
Charging mode	Mode 4

Electrical properties

Type of charging current	DC
Charging power	60 kW
Charging current	60 A

Temperature sensors (Pt 1000)

Sensor type	Pt 1000
Standards/regulations	DIN EN 60751
Attachment point	Sensor for the DC contacts
Switch-off temperature	90 °C ±1 K (equivalent to a Pt 1000 value of 1346.5 Ω)
Long-term stability	0.06 % (after 1000 hours at 130 °C)
Recommended measured current	1 mA (1 V at 0 °C)
Coefficient	3850 ppm/K
Ambient temperature	-50 °C ... 130 °C (Operation)

Material specifications

Color (Housing)	black (9005)
Color (Handle area)	gray (7042)
Color (Mating face)	black (9005)
Color (Protective cap)	black (9005)
Color (Cable)	black (9005)

Cable/line

Cable length	5 m
Stripping length of the sheath	140 mm ±10 mm
Stripping length	140 mm ±10 mm

Standards and regulations

Standards

Standards/regulations	IEC 62196-3
-----------------------	-------------


EV-T2M4CC-DC60A-5,0M16ESBK00 - DC charging cable

1627124

<https://www.phoenixcontact.com/us/products/1627124>

Drawings

Schematic diagram

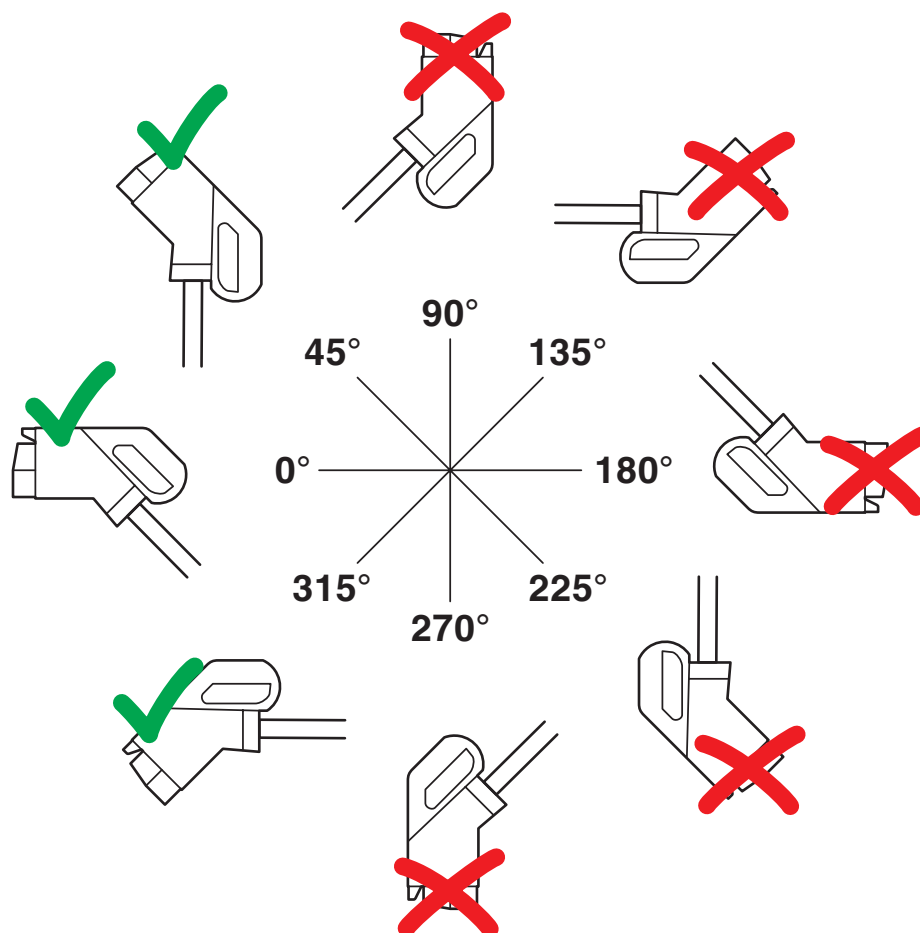


The resting position must be installed in the charging station such that the user cannot hang up the vehicle connector upside down (90° to 270°). However, positions rotated upward (45°) or downward (315°) are options for a resting position.

EV-T2M4CC-DC60A-5,0M16ESBK00 - DC charging cable

1627124

<https://www.phoenixcontact.com/us/products/1627124>

Schematic diagram

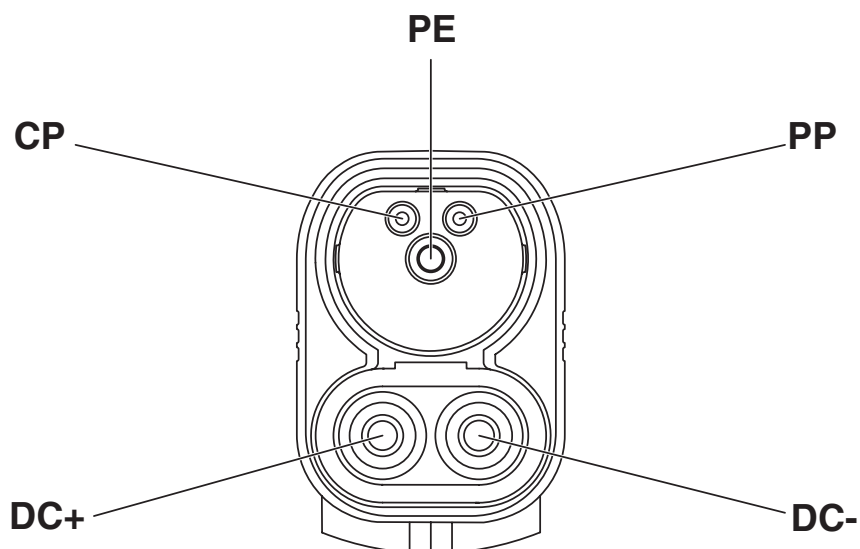


Pin assignment of the Vehicle Connector

EV-T2M4CC-DC60A-5,0M16ESBK00 - DC charging cable

1627124

<https://www.phoenixcontact.com/us/products/1627124>

Schematic diagram

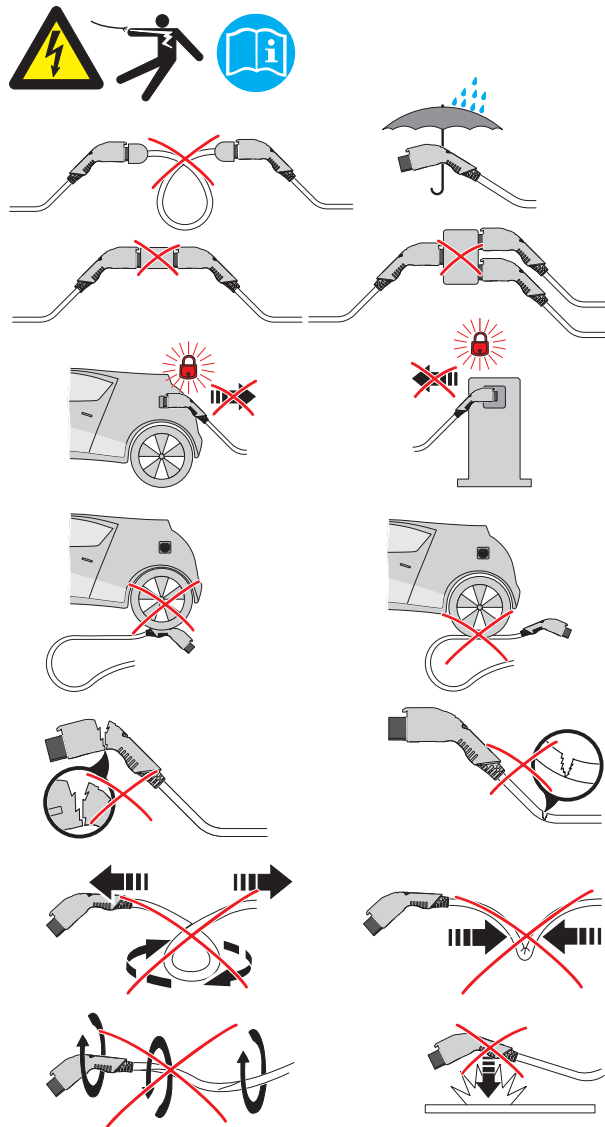


EV-T2M4CC-DC60A-5,0M16ESBK00 - DC charging cable

1627124


<https://www.phoenixcontact.com/us/products/1627124>

Schematic diagram

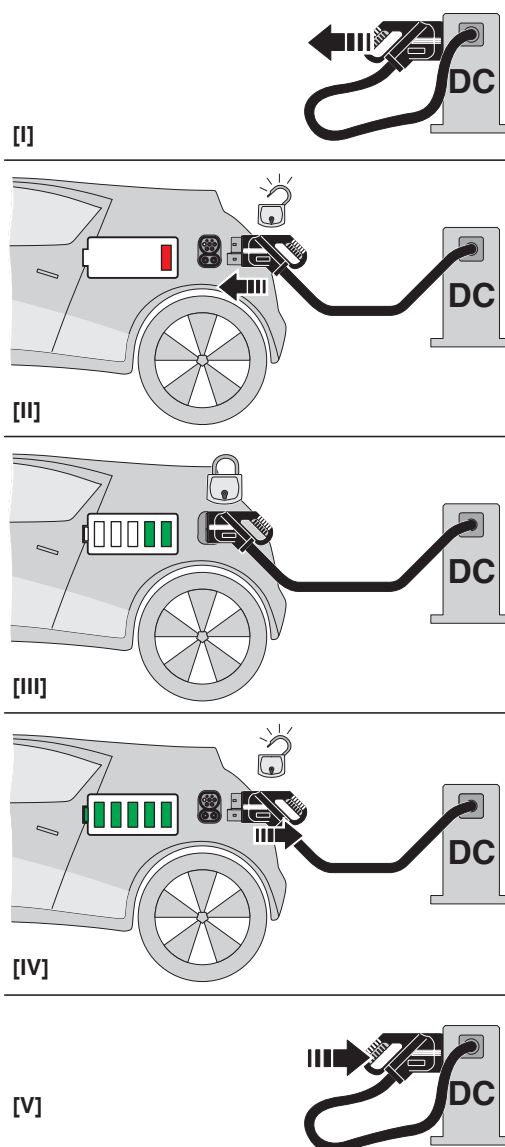

Operating instructions

Schematic diagram

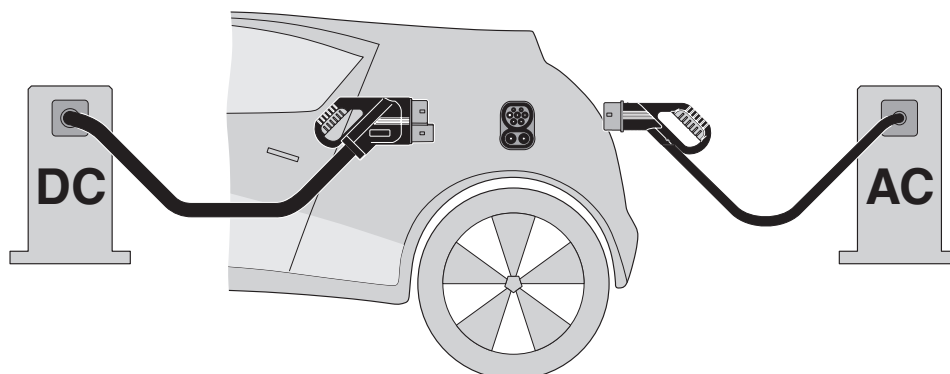

The Combined Charging System (CCS) principle - standard-compliant charging system for electric vehicles, which supports both conventional AC charging and fast DC charging. Both Vehicle Connectors fit into the CCS Vehicle Inlet.


EV-T2M4CC-DC60A-5,0M16ESBK00 - DC charging cable



1627124

<https://www.phoenixcontact.com/us/products/1627124>

Dimensional drawing

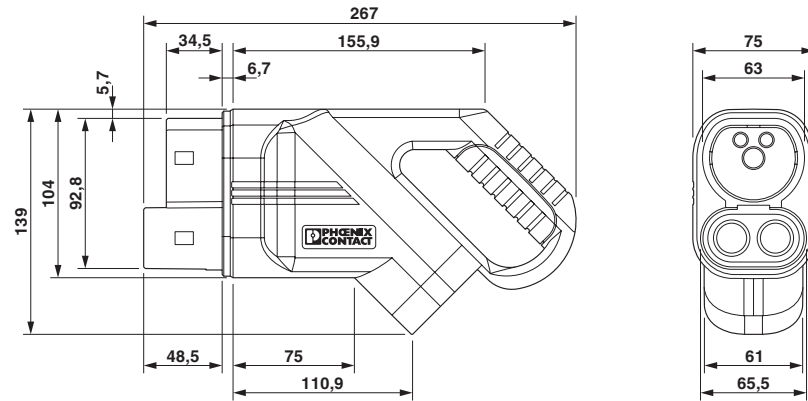

Make sure that the vehicle charging connector is placed in an appropriate charging connector holder, which ensures a minimum protection rating of IP24 in accordance with IEC 61851-1, for the entire time between charging. To create this charging connector holder, use the dimensions of the vehicle charging connector. Detailed dimensions can also be found in the Download area.

EV-T2M4CC-DC60A-5,0M16ESBK00 - DC charging cable



1627124
<https://www.phoenixcontact.com/us/products/1627124>

Classifications

UNSPSC

UNSPSC 21.0	39121522
-------------	----------

EV-T2M4CC-DC60A-5,0M16ESBK00 - DC charging cable



1627124
<https://www.phoenixcontact.com/us/products/1627124>

Environmental product compliance

China RoHS	
Environment friendly use period (EFUP)	<div>EFUP-10</div> <div>An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.</div>
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

EV-T2M4CC-DC60A-5,0M16ESBK00 - DC charging cable



1627124

<https://www.phoenixcontact.com/us/products/1627124>

Accessories

EV-T2CCS-PARK - Charging connector holder

1624153

<https://www.phoenixcontact.com/us/products/1624153>



CHARX connect standard, Charging connector holder, Accessories, for vehicle charging connectors on charging stations (EVSE), CCS type 2, IEC 62196-3, Front mounting, housing: black, Item is not compatible with the HPC CCS type 2 charging cable from Phoenix Contact.

EV-PLCC-AC1-DC1 - DC charging controller

1624130

<https://www.phoenixcontact.com/us/products/1624130>



Programmable charging controller for DC and AC charging of electric vehicles in accordance with IEC 61851-1,-23, DIN SPEC 70121, and CHAdeMO, with integrated cellular modem

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com