

UK 3-TWIN-PE - Ground terminal



1923128

<https://www.phoenixcontact.com/us/products/1923128>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Ground terminal, connection method: Screw connection, 1 level, cross section: 0.2 mm² - 2.5 mm², mounting type: NS 35/7,5, NS 35/15, NS 32, color: green-yellow

Your advantages

- Same shape and pitch as the feed-through terminal blocks
- Universal protective conductor foot for mounting on NS 35... or NS 32... DIN rails (with the exception of NS 35/15-2,3)

Commercial data

Item number	1923128
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE12
Product key	BE1222
Catalog page	Page 468 (C-1-2019)
GTIN	4017918052492
Weight per piece (including packing)	20.541 g
Weight per piece (excluding packing)	20.404 g
Customs tariff number	85369010
Country of origin	TR

UK 3-TWIN-PE - Ground terminal



1923128

<https://www.phoenixcontact.com/us/products/1923128>

Technical data

Product properties

Product type	Ground terminal block
Number of connections	3
Number of rows	2

Data management status

Article revision	10
------------------	----

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	0.77 W

Connection data

Grounding foot	Yes
Number of connections per level	3
Nominal cross section	2.5 mm ²

1 level

Screw thread	M3
Note	Please observe the current carrying capacity of the DIN rails.
Tightening torque	0.5 ... 0.6 Nm
Stripping length	8 mm
Connection in acc. with standard	IEC 60947-7-2
Conductor cross section rigid	0.2 mm ² ... 2.5 mm ²
Cross section AWG	24 ... 14 (converted acc. to IEC)
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section, flexible [AWG]	24 ... 14 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.25 mm ² ... 1.5 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.25 mm ² ... 1 mm ²
Cross-section with insertion bridge, rigid	4 mm ²
Cross-section with insertion bridge, flexible	4 mm ²

Dimensions

Width	5.2 mm
Height	50.5 mm
Depth on NS 32	52 mm
Depth on NS 35/7,5	47 mm
Depth on NS 35/15	54.5 mm

UK 3-TWIN-PE - Ground terminal



1923128

<https://www.phoenixcontact.com/us/products/1923128>

Material specifications

Color	green-yellow
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	125 °C
Relative insulation material temperature index (Elec., UL 746 B)	125 °C

Mechanical properties

General

Terminal block mounting	0.5 Nm ... 0.6 Nm (PE foot with mounting screw, M2.5)
-------------------------	---

Mechanical data

Open side panel	No
-----------------	----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations


Connection in acc. with standard	IEC 60947-7-2
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15
	NS 32
Terminal block mounting	0.5 Nm ... 0.6 Nm (PE foot with mounting screw, M2.5)

Drawings

Circuit diagram

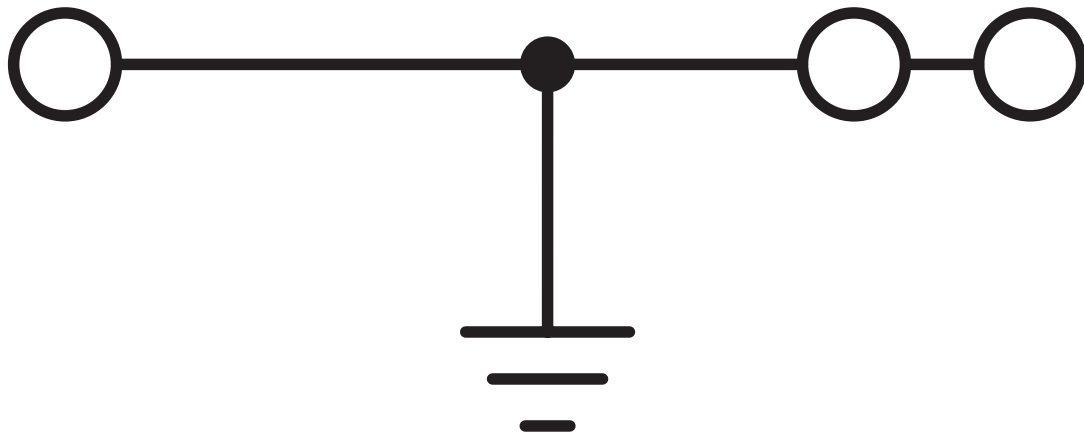

UK 3-TWIN-PE - Ground terminal




1923128


<https://www.phoenixcontact.com/us/products/1923128>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1923128>

**EAC**

EAC
Approval ID: RU C-DE.BL08.B.00534

<div>cULus Recognized Approval ID: E60425</div>				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B				
	-	-	30 - 12	-
Use group C				
	-	-	30 - 12	-
Use group F				
	-	-	30 - 12	-
Use group D				
	-	-	30 - 12	-

UK 3-TWIN-PE - Ground terminal



1923128

<https://www.phoenixcontact.com/us/products/1923128>

Classifications

ECLASS

ECLASS-11.0	27141141
ECLASS-13.0	27250103

ETIM

ETIM 9.0	EC000901
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

UK 3-TWIN-PE - Ground terminal



1923128
<https://www.phoenixcontact.com/us/products/1923128>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	e2a6a385-40d2-408c-9686-cd92569a3ea3

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com