




**Part Number :** [22284105](#)  
**Product Description :** KK 254 Breakaway Header, Vertical, 10 Circuits, 0.38µm Gold (Au) Selective Plating  
**Series Number :** 42375  
**Status :** Active  
**Product Category :** PCB Headers and Receptacles  
**Engineering Number :** 42375-0255

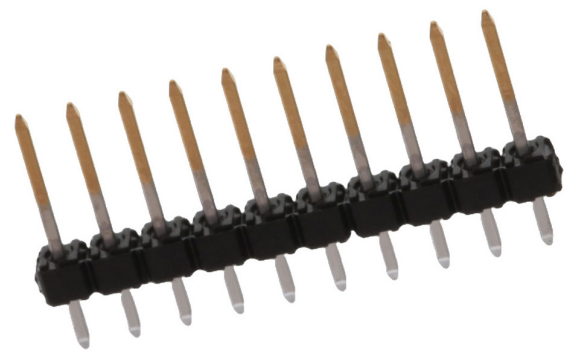

## Documents & Resources

### Drawings

[Drawing 022284105\\_sd.pdf](#)  
[Packaging Design Drawing PK-40873-0041-001.pdf](#)

### 3D Models and Design Files

[3D Model 022284105\\_stp.zip](#)

### Specifications

[Product Specification PS-10-07-001.pdf](#)

## Product Environment Compliance

### Compliance

|                    |                                                                                       |
|--------------------|---------------------------------------------------------------------------------------|
| GADSL/IMDS         | Not Relevant                                                                          |
| China RoHS         |  |
| EU ELV             | Not Relevant                                                                          |
| Low-Halogen Status | Not Low-Halogen per IEC 61249-2-21                                                    |
| REACH SVHC         | Not Contained per D(2024)4144-DC (27 June 2024)                                       |
| EU RoHS            | Compliant per EU 2015/863                                                             |

### [Multiple Part Product Compliance Statements](#)

- Eu RoHS
- REACH SVHC

- Low-Halogen

#### Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

#### EU RoHS Certificate of Compliance

---

### Part Details

#### General

|                |                                                                                          |
|----------------|------------------------------------------------------------------------------------------|
| Status         | Active                                                                                   |
| Category       | PCB Headers and Receptacles                                                              |
| Series         | 42375                                                                                    |
| Description    | KK 254 Breakaway Header, Vertical,<br>10 Circuits, 0.38µm Gold (Au)<br>Selective Plating |
| Application    | Board-to-Board, Signal, Wire-to-<br>Board                                                |
| Component Type | PCB Header                                                                               |
| Product Family | KK Interconnect Systems                                                                  |
| Product Name   | KK 254                                                                                   |
| UPC            | 800753830073                                                                             |

#### Agency

|     |         |
|-----|---------|
| CSA | LR19980 |
| UL  | E29179  |

#### Electrical

|                               |      |
|-------------------------------|------|
| Current - Maximum per Contact | 4.0A |
| Voltage - Maximum             | 500V |

#### Physical

|                    |     |
|--------------------|-----|
| Breakaway          | Yes |
| Circuits (Loaded)  | 10  |
| Circuits (maximum) | 10  |

|                                |                                |
|--------------------------------|--------------------------------|
| Color - Resin                  | Black                          |
| Durability (mating cycles max) | 100                            |
| First Mate / Last Break        | No                             |
| Flammability                   | 94V-0                          |
| Glow-Wire Capable              | No                             |
| Guide to Mating Part           | No                             |
| Keying to Mating Part          | None                           |
| Lock to Mating Part            | None                           |
| Material - Metal               | Brass                          |
| Material - Plating Mating      | Gold                           |
| Material - Plating Termination | Tin                            |
| Material - Resin               | High Temperature Thermoplastic |
| Net Weight                     | 0.698/g                        |
| Number of Rows                 | 1                              |
| Orientation                    | Vertical                       |
| Packaging Type                 | Bag                            |
| PC Tail Length                 | 3.05mm                         |
| PCB Locator                    | No                             |
| PCB Retention                  | None                           |
| PCB Thickness - Recommended    | 1.60mm                         |
| Pitch - Mating Interface       | 2.54mm                         |
| Plating min - Mating           | 0.381µm                        |
| Plating min - Termination      | 2.540µm                        |
| Polarized to Mating Part       | No                             |
| Polarized to PCB               | No                             |
| Shrouded                       | No                             |
| Stackable                      | No                             |
| Temperature Range - Operating  | See Product Specification      |
| Termination Interface Style    | Through Hole                   |

## Solder Process Data

|                              |      |
|------------------------------|------|
| Max-Duration                 | 5    |
| Lead-Free Process Capability | WAVE |
| Max-Cycle                    | 1    |
| Max-Temp                     | 260  |

---

## Mates With / Use With

### Mates with Part(s)

| Description                                    | Part Number |
|------------------------------------------------|-------------|
| KK 254 Single Row Crimp Housings               | <u>2695</u> |
| KK 254 Receptacle Housings                     | <u>7880</u> |
| KK 254 PC Board Connector                      | <u>4455</u> |
| 2.54mm Pitch C-Grid Shunt<br>Terminal Housings | <u>7859</u> |

---

This document was generated on Sep 23, 2024

---