

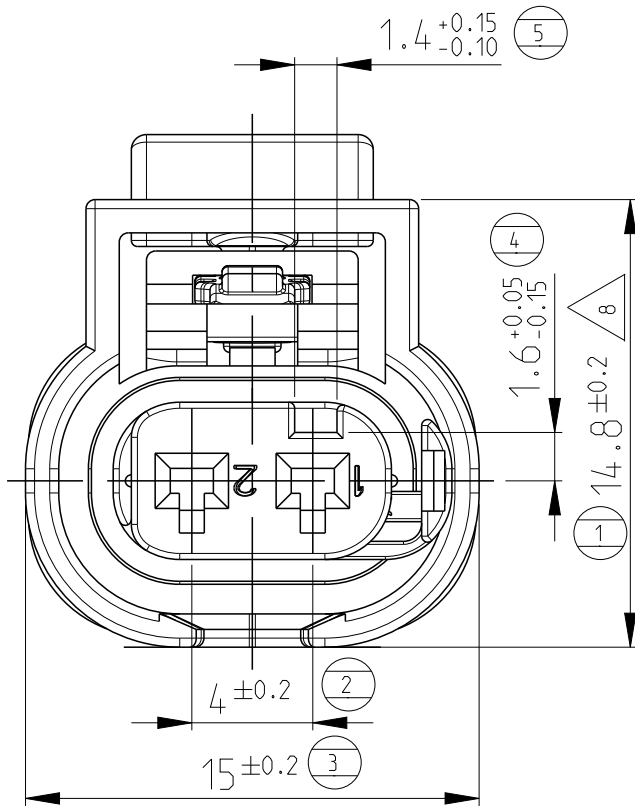


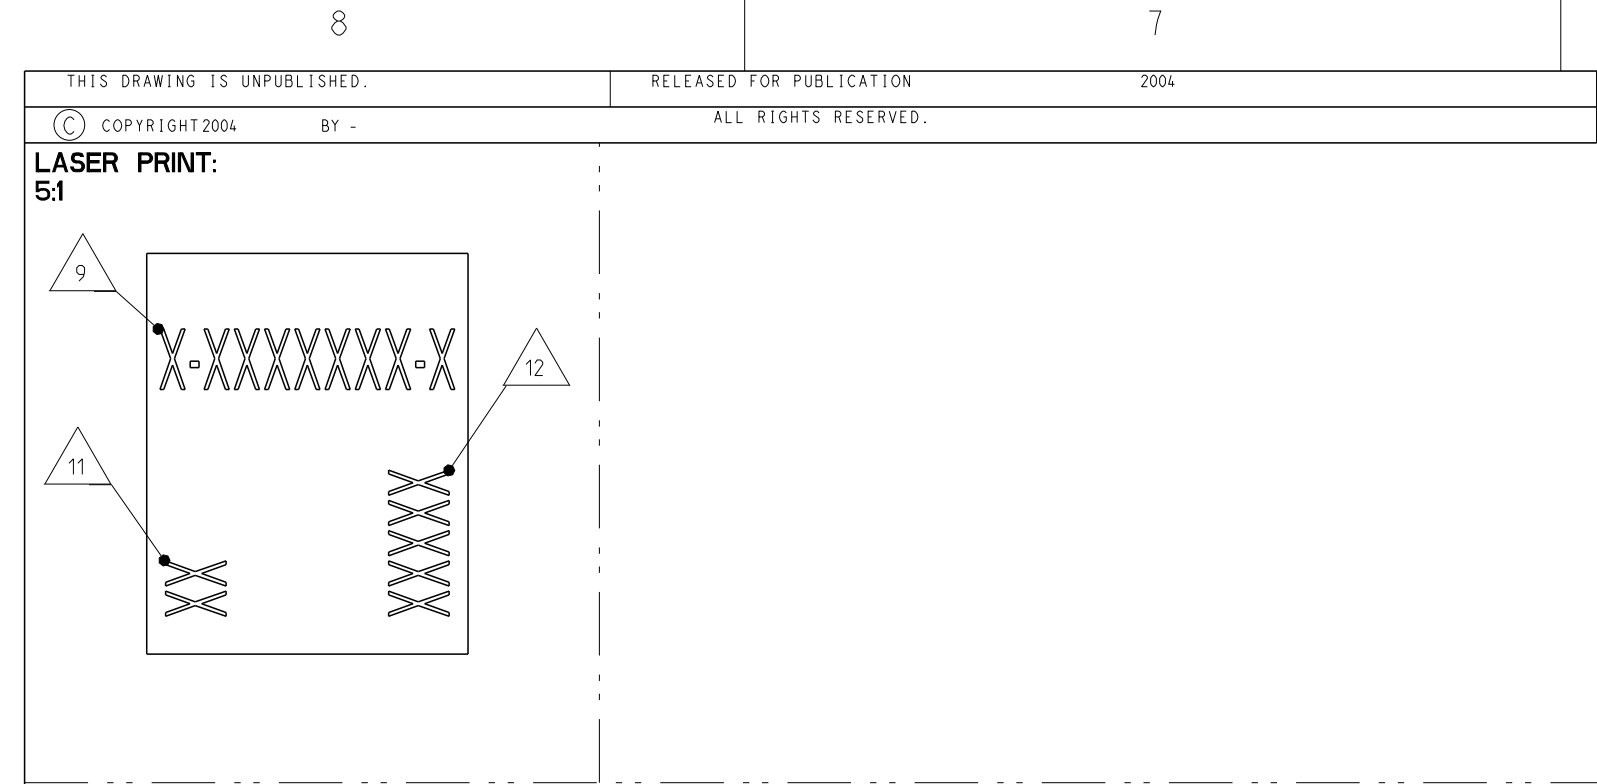

1

REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN
A		NEW DRAWING	28JAN2016	SzN
A1		YELLOW OUT HSG + RED CPA	19APR2016	SzN
A2		REVISION CORRECTED IN FAMILY TABLE	22MAR2017	LSz

CODING:
2:1

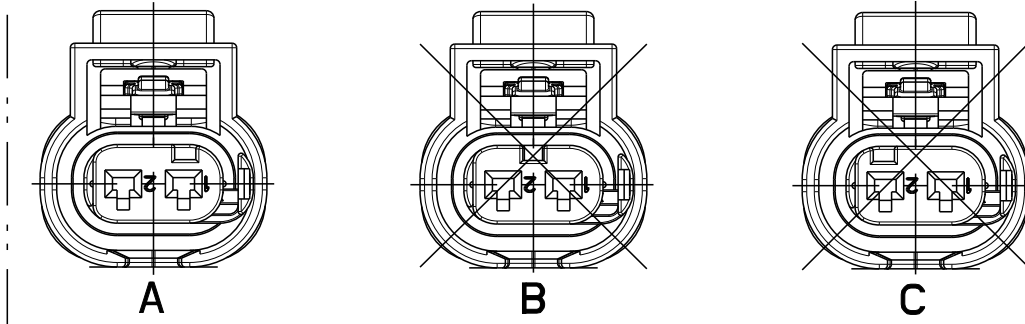


NOTES:




- USABLE CONTACTS MCON 1.2
SEE TE Connectivity -NO. 1452674, VERSION SINGLE WIRE SEAL
- AREA FOR PRINT
- MAX. WIRE SIZE RANGE 1.0 mm² FLR PERMITTED
FOR CAVITY-Ø 3.55MM
QUANTITY SEE WIRE HARNESS DRAWING
FOR PERMISSIBLE CURRENT CARRYING CAPACITY OF THE SINGLE CONTACT
SEE PRODUCT SPECIFICATION NO.108-18782
- SUPPLIER-MARK
- SPACE OF ACTIVITY
- SUPPLY CONDITION: CPA IN PRELOCKED POSITION
- SUPPLY CONDITION: RETAINER IN PRELOCKED POSITION
- WARPAGE PERMITTED TO MAX. -0.5mm
- TE Connectivity ORDER-NO.
- ACCORDING TO INTERFACE DRAWING
SEE TE-NO. 114-18679-3
- ASSEMBLY LINE SEGMENT IDENTIFICATION
- DATE CODE (DDYY)

CODING A AS SHOWN

A-A

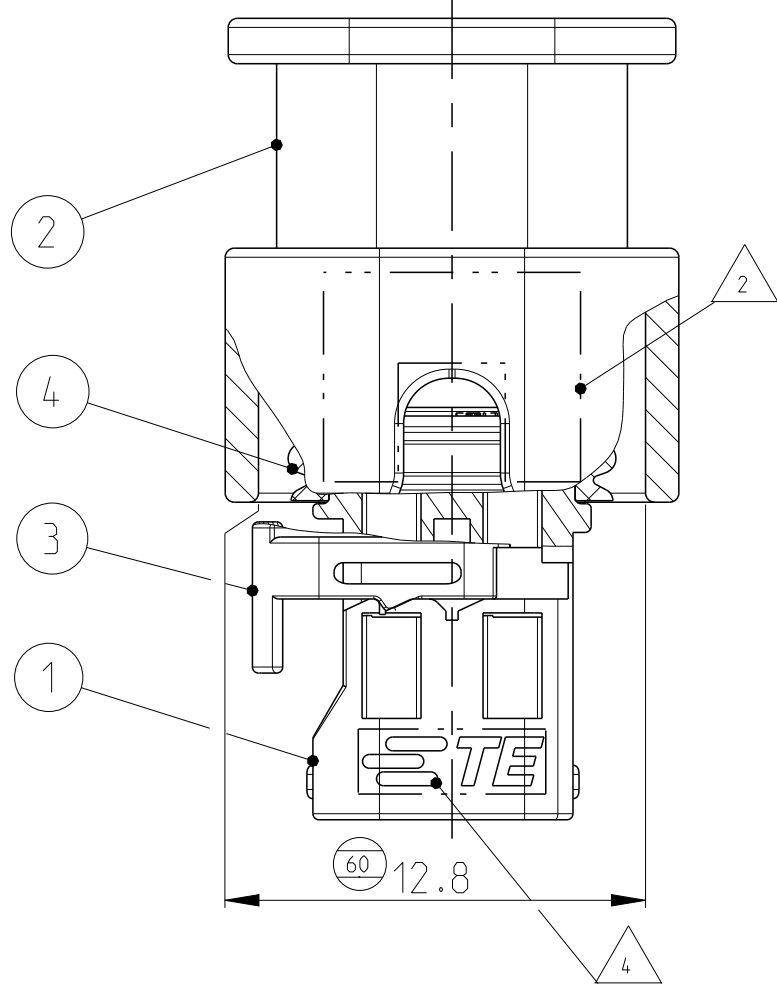


B-B

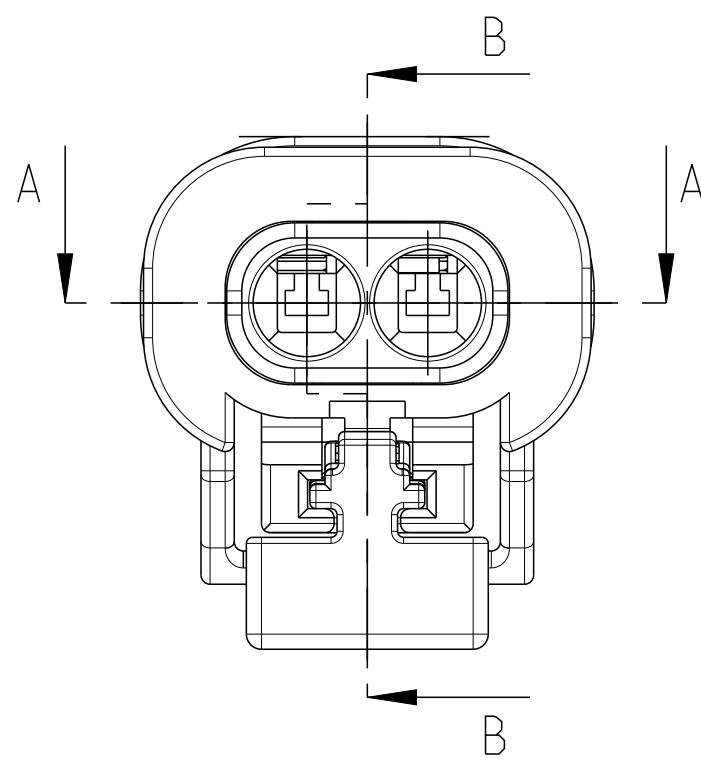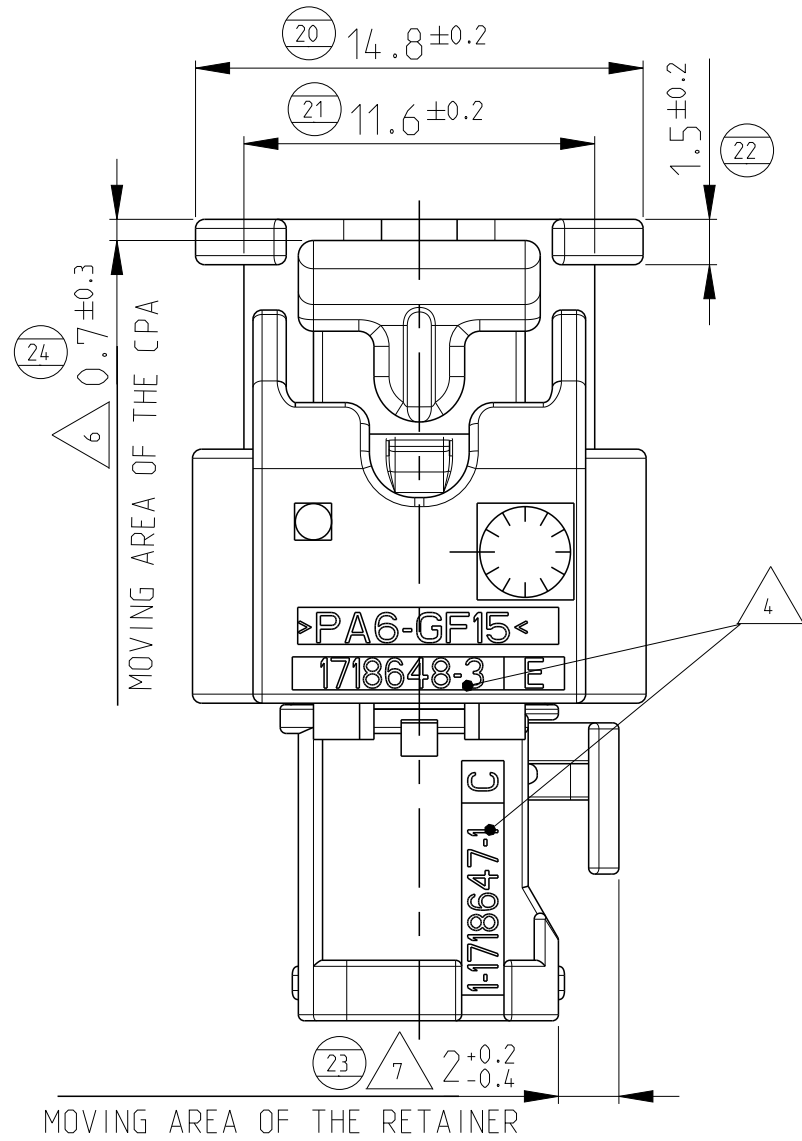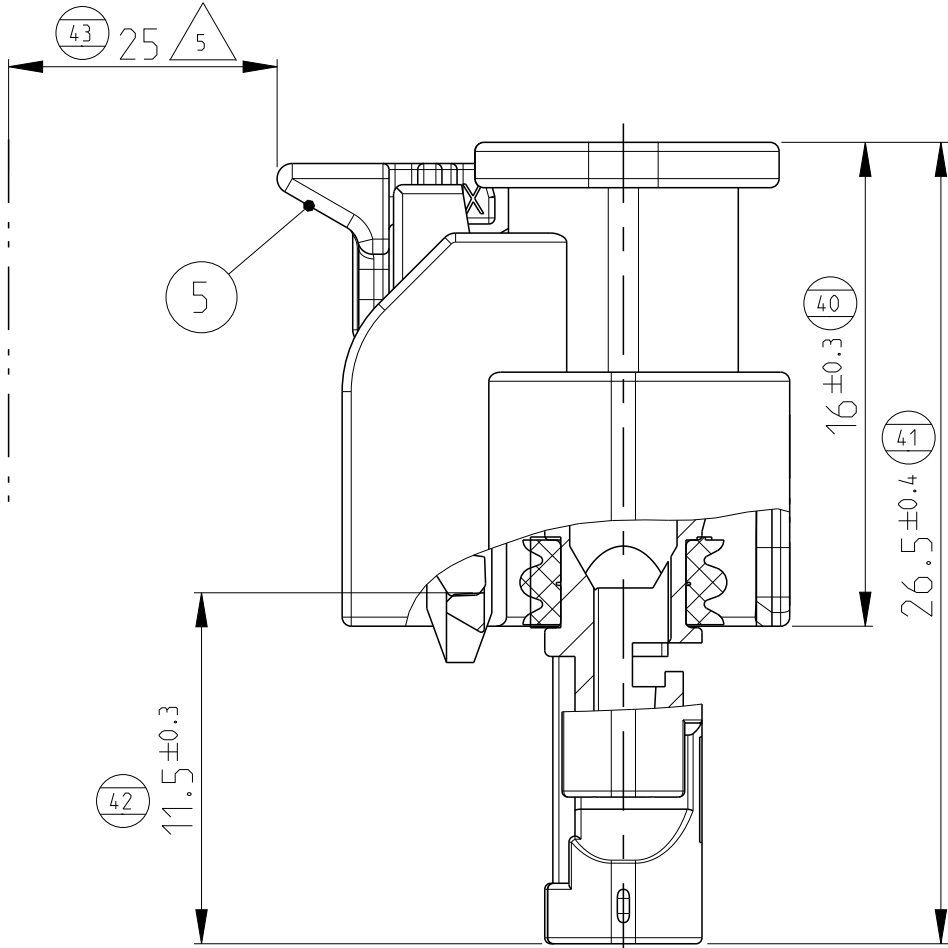


A2

3-2299071-1	C	2pos. MCON 1.2 - LL Connector, Sealed	A	1 CPA, MCON 1.2	PBT-GF33	RED	5
				1 2pos. MCON 1.2 - Seal	SILICONE	NATURE	4
				1 2pos. MCON 1.2 - Retainer	PA66-GF15	VIOLETT	3
				1 2pos. MCON 1.2 - Protec. Cover	PA66-GF30	BLACK	2
				1 2pos. MCON 1.2 - Rec. Housing	PA66-GF30	BLUE	1
2-2299071-1	B	2pos. MCON 1.2 - LL Connector, Sealed	A	1 CPA, MCON 1.2	PBT-GF33	RED	5
				1 2pos. MCON 1.2 - Seal	SILICONE	NATURE	4
				1 2pos. MCON 1.2 - Retainer	PA66-GF15	VIOLETT	3
				1 2pos. MCON 1.2 - Protec. Cover	PA66-GF30	BLACK	2
				1 2pos. MCON 1.2 - Rec. Housing	PA66-GF30	NATURE	1
1-2299071-1	A	2pos. MCON 1.2 - LL Connector, Sealed	A	1 CPA, MCON 1.2	PBT-GF33	RED	5
				1 2pos. MCON 1.2 - Seal	SILICONE	NATURE	4
				1 2pos. MCON 1.2 - Retainer	PA66-GF15	VIOLETT	3
				1 2pos. MCON 1.2 - Protec. Cover	PA66-GF30	YELLOW	2
				1 2pos. MCON 1.2 - Rec. Housing	PA66-GF30	BLACK	1

CPA IN END-LOCK POSITION
21

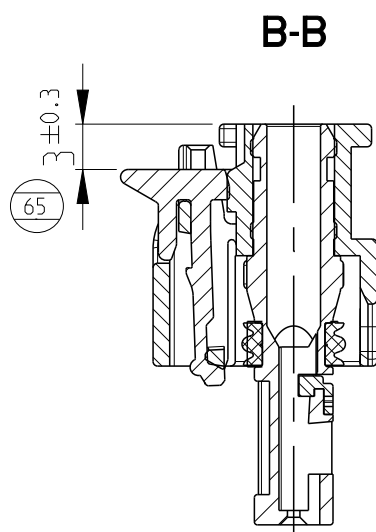

RETAINER IN LOCK POSITION
21

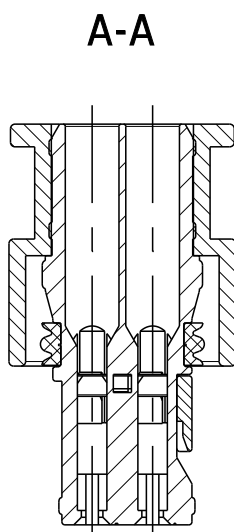

TOLERANCES UNLESS OTHERWISE SPECIFIED ACC. TO DIN 16901-140@CENTRIC TO NOMINAL DIMENSION, EDITION 1982-11 SHALL APPLY. Freimaßtoleranzen nach DIN 16901-140@. Es gilt die Ausgabe 1982-11.		DWN SzNemes 28JAN2016		CNC R.Turocz 01JAN2016	
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SzNemes 28JAN2016		CNC R.Turocz 01JAN2016	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED		PRODUCT SPEC 108-18969	
MATERIAL -		APVD		APPLICATION SPEC 114-18861	
-		0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES FINISH		WEIGHT -	
-		-		CUSTOMER DRAWING	
-		-		SCALE 4:1	
-		-		SHEET 1 OF 1	
-		-		REV A2	