

VS-PNRJ45-PNRJ45-93K-10 - Patch cable



1403874

<https://www.phoenixcontact.com/us/products/1403874>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sercos III patch cable, shielded, star-quad, 22 AWG stranded (7-wire), RAL 3020 (traffic red), RJ45 plug/IP20, straight, to RJ45 plug/IP20, straight, length: 10 m

Commercial data

Item number	1403874
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	NULL
Product key	ABNABA
GTIN	4046356671286
Weight per piece (including packing)	689.3 g
Weight per piece (excluding packing)	667.986 g
Customs tariff number	85444210
Country of origin	PL

VS-PNRJ45-PNRJ45-93K-10 - Patch cable



1403874

<https://www.phoenixcontact.com/us/products/1403874>

Technical data

Product properties

Product type	Data cable preassembled
Application	Standard
Sensor type	Sercos
Number of positions	4
Shielded	yes

Insulation characteristics

Overvoltage category	I
Degree of pollution	1

Signaling

Status display	No
----------------	----

Electrical properties

Rated voltage (III/3)	72 V (DC)
Transmission medium	Copper
Transmission characteristics (category)	CAT5
Transmission speed	100 Mbps

Mechanical properties

Mechanical data

Insertion force per signal contact	30.00 N
Extraction force per signal contact	50 N

Material specifications

Flammability rating according to UL 94	V0
----------------------------------------	----

Connector

Connection 1

Type	Plug straight RJ45
Shielded	yes
Degree of protection	IP20

Connection 2

Type	Plug straight RJ45
Shielded	yes
Insertion/withdrawal cycles	≥ 750
Degree of protection	IP20

Cable/line

Cable length	10.00 m
--------------	---------


VS-PNRJ45-PNRJ45-93K-10 - Patch cable



1403874

<https://www.phoenixcontact.com/us/products/1403874>

Sercos III [93K]

Dimensional drawing	
Shielded	yes
UL AWM Style	21694 (60 °C / 600 V)
Cable weight	68 kg/km
Cable type	Sercos III
Cable type (abbreviation)	93K
Signal type/category	Sercos CAT5 (IEC 11801), 100 Mbps
Cable structure	1x4xAWG22/7, SF/TQ
External cable diameter	6.50 mm ±0.2 mm
Outer sheath, material	PVC
External sheath, color	signal red RAL 3020
Thickness, outer sheath	approx. 0.90 mm
Material, inner sheath	PVC
Conductor material	Tin-plated Cu litz wires
Conductor structure signal line	7x 0.25 mm
AWG signal line	22
Conductor cross section	4x 0.34 mm ²
Material wire insulation	PE
Wire diameter incl. insulation	approx. 1.55 mm
Single wire, color	white, yellow, blue, orange
Type of pair shielding	Aluminum-lined polyester foil
Overall twist	Star quad
Shielding	Tinned copper braided shield
Nominal voltage, cable	600 V
Test voltage Core/Core	2000 V (50 Hz, 1 min.)
Test voltage Core/Shield	2000.00 V (50 Hz, 1 min.)
Cable resistance	≤ 120 Ω/km
Cable insulation resistance	≥ 0.5 GΩ*km
Coupling resistance	≤ 20.00 mΩ/m (at 10 Hz)
Wave impedance	100 Ω ±15 Ω (at 100 MHz)
Signal runtime	5.3 ns/m
Minimum bending radius, fixed installation	3 x D
Minimum bending radius, flexible installation	7 x D
Resistance to oil	Resistant to oil to a limited extent
Flame resistance	according to UL 1685 (CSA FT 4)

VS-PNRJ45-PNRJ45-93K-10 - Patch cable



1403874

<https://www.phoenixcontact.com/us/products/1403874>

Other resistance	UV resistant (According to UL 1581, Section 1200)
Ambient temperature (operation)	-40 °C ... 70 °C (Cable, flexible installation)
	-40 °C ... 70 °C (cable, fixed installation)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
	IP20
Ambient temperature (operation)	-20 °C ... 70 °C (Cable, flexible installation)


VS-PNRJ45-PNRJ45-93K-10 - Patch cable

1403874


<https://www.phoenixcontact.com/us/products/1403874>

Drawings

Circuit diagram

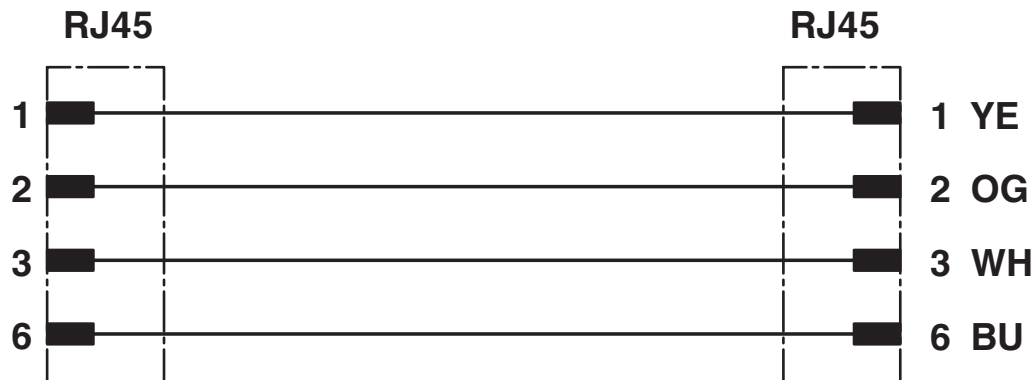

Dimensional drawing

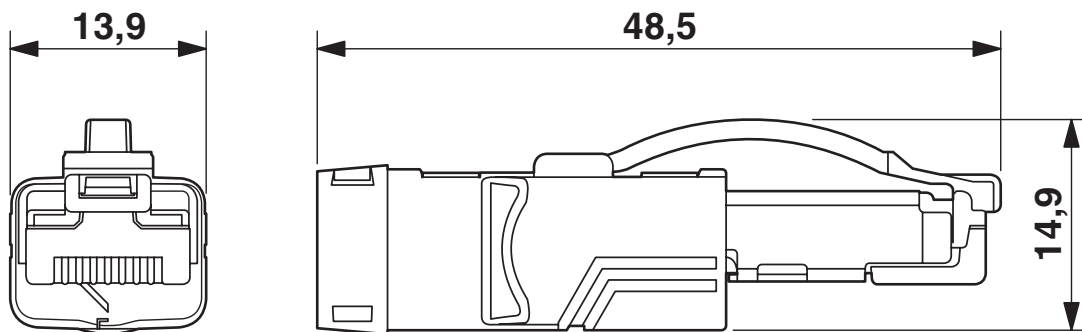

RJ45 connector, IP20

VS-PNRJ45-PNRJ45-93K-10 - Patch cable



1403874

<https://www.phoenixcontact.com/us/products/1403874>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1403874>



EAC

Approval ID: 19060508

VS-PNRJ45-PNRJ45-93K-10 - Patch cable



1403874

<https://www.phoenixcontact.com/us/products/1403874>

Classifications

ECLASS

ECLASS-11.0	27060308
ECLASS-12.0	27060308
ECLASS-13.0	27060307

ETIM

ETIM 9.0	EC002599
----------	----------

UNSPSC

UNSPSC 21.0	26121600
-------------	----------

VS-PNRJ45-PNRJ45-93K-10 - Patch cable



1403874
<https://www.phoenixcontact.com/us/products/1403874>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com