


4

3

2

1

REVISIONS		
LTR	DESCRIPTION	DATE
D	REVISED PER ECO-11-002238	01/31/2011

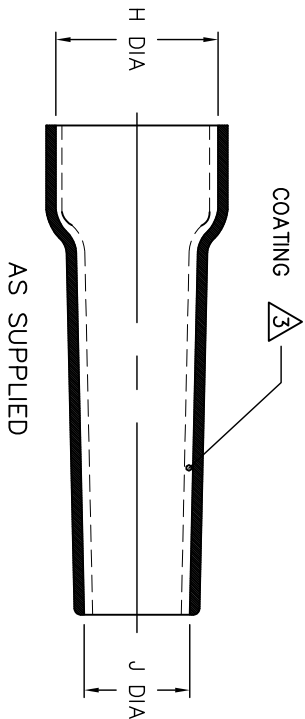

### NOTES

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. DIMENSIONS APPEARING IN TABLE ARE AS FOLLOWS:
  - a - AS SUPPLIED
  - b - AFTER UNRESTRICTED RECOVERY

△ COATING (ADHESIVE): IS INCLUDED. AS SUPPLIED DIMENSIONS APPEARING IN TABLE ARE FOR UNCOATED PARTS. WHEN COATING IS ADDED, ENTRY DIAMETER WILL BE REDUCED BY 1.5 [.06] MAX.

### 4. ORDERING INFORMATION:

202A115 -XX -XX /XXX -0

BASE PART NUMBER \_\_\_\_\_  
MATERIAL DASH NUMBER \_\_\_\_\_

- 3 POLYOLEFIN, SEMI RIGID (RT-301)
- 4 POLYOLEFIN, FLEXIBLE (RT-1304)
- 25 ELASTOMER, FLUID RESISTANT (RW-2070)

MODIFICATION NUMBER \_\_\_\_\_

ADHESIVE SLASH NUMBER \_\_\_\_\_  
SEE COMPATIBILITY CHART BELOW

COLOR DESIGNATOR \_\_\_\_\_

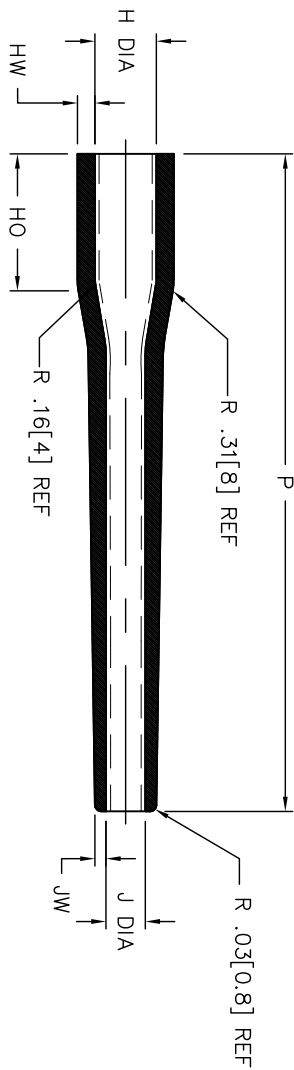




TABLE OF DIMENSIONS

PART DESCRIPTION	H		J		P	HO	HW	JW
	MIN	MAX	MIN	MAX				
202A115	.39 [10]	.28 [7]	.35 [9]	.18 [4.5]	±10% b	±10% b	±25% b	±25% b
					2.95 [75]	.56 [14.3]	.10 [2.5]	.05 [1.3]

### CUSTOMER DRAWING

COMPATIBILITY CHART		
MATERIAL DASH NO.	ADHESIVE (COATING) SLASH NUMBER	ADHESIVE (COATING) S NUMBER
-3	/42; /86	S-1017; S-1048
-4	/42; /86	S-1017; S-1048
-25	/86	S-1048

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE IN BRACKETS.		DRAWN YUNGU YEN		<div><div><div>Roychem Molded Parts</div><div>305 Constitution Dr</div><div>Menlo Park, CA 94025</div></div></div>
DECIMAL TOLERANCES		APPROVED DHURRELL		
.xxx ± 0.005	[0.13 mm]	<div></div> THIRD ANGLE PROJECTION		
.xx ± 0.01	[0.25 mm]			
.x ± 0.1	[0.50 mm]			
ANGLE TOLERANCE		TITLE <div>BOOT, STRAIGHT</div>		
x ± 1 DEG.				
TYCO ELECTRONICS RESERVES THE RIGHT TO AMEND THIS DRAWING AT ANY TIME. USERS ARE RESPONSIBLE FOR THE CURRENT EDITION OF THIS PRODUCT FOR THEIR APPLICATION.				
© 2008-2011 Tyco Electronics Corporation. All rights reserved.				
SIZE CODE IDENT. NO. 06090		DWG. NO. 202A115		SHEET 1 OF 1
DO NOT SCALE THIS DRAWING.				