

DATA SHEET

THICK FILM CHIP RESISTORS

Automotive grade

AC series

5%, 1%

sizes 0402/0603/0805/1206/
1210/1218/2010/2512

RoHS compliant & Halogen free



SCOPE

This specification describes AC0402 to AC2512 chip resistors with lead-free terminations made by thick film process.

APPLICATIONS

- All general purpose applications
- Car electronics, industrial application

FEATURES

- Comply with AEC-Q200 standard
- Superior resistance against sulfur containing atmosphere
- MSL class: MSL 1
- AC series soldering is compliant with J-STD-020D
- Halogen free epoxy
- RoHS compliant
 - Products with lead-free terminations meet RoHS requirements
 - Pb-glass contained in electrodes, resistor element and glass are exempted by RoHS
- Reduce environmentally hazardous waste
- High component and equipment reliability
- Save PCB space
- The resistors are 100% performed by automatic optical inspection prior to taping.

ORDERING INFORMATION - GLOBAL PART NUMBER

Part number is identified by the series name, size, tolerance, packaging type, temperature coefficient, taping reel and resistance value.

GLOBAL PART NUMBER

AC **XXXX** **X** **X** **X** **XX** **XXXX** **L**
 (1) (2) (3) (4) (5) (6) (7)

(1) SIZE

0402 / 0603 / 0805 / 1206 / 1210 / 1218 / 2010 / 2512

(2) TOLERANCE

F = $\pm 1\%$

J = $\pm 5\%$ (for Jumper ordering, use code of J)

(3) PACKAGING TYPE

R = Paper/PE taping reel

K = Embossed taping reel

(4) TEMPERATURE COEFFICIENT OF RESISTANCE

– = Base on spec

(5) TAPING REEL

07 = 7 inch dia. Reel

10 = 10 inch dia. Reel

13 = 13 inch dia. Reel

7D = 7 inch dia. Reel with double quantity

(6) RESISTANCE VALUE

1 Ω to 10 M Ω

There are 2~4 digits indicated the resistance value. Letter R/K/M is decimal point, no need to mention the last zero after R/K/M, e.g. 1K2, not 1K20.

Detailed coding rules of resistance are shown in the table of "Resistance rule of global part number".

(7) DEFAULT CODE

Letter L is the system default code for ordering only. (Note)

Resistance rule of global part number	
Resistance coding rule	Example
XXXX (1 to 9.76 Ω)	1R = 1 Ω 1R5 = 1.5 Ω 9R76 = 9.76 Ω
XXRX (10 to 97.6 Ω)	10R = 10 Ω 97R6 = 97.6 Ω
XXXR (100 to 976 Ω)	100R = 100 Ω 976R = 976 Ω
XKXX (1 to 9.76 K Ω)	1K = 1,000 Ω 9K76 = 9760 Ω
XMXX (1 to 9.76 M Ω)	1M = 1,000,000 Ω 9M76 = 9,760,000 Ω
XXMX (10 M Ω)	10M = 10,000,000 Ω

ORDERING EXAMPLE

The ordering code for an AC0402 chip resistor, value 100 K Ω with $\pm 1\%$ tolerance, supplied in 7-inch tape reel is: AC0402FR-07100KL.

NOTE

1. All our RSMD products are RoHS compliant and Halogen free. "LFP" of the internal 2D reel label states "Lead-Free Process".
2. On customized label, "LFP" or specific symbol can be printed.
3. AC series with $\pm 0.5\%$ tolerance is also available. For further information, please contact sales.

MARKING**AC0402**

No marking

Fig. 1

AC0603 / AC0805 / AC1206 / AC1210 / AC2010 / AC2512

E-24 series: 3 digits, $\pm 5\%$
First two digits for significant figure and 3rd digit for number of zeros

Fig. 2

AC0603


E-24 series: 3 digits, $\pm 1\%$
One short bar under marking letter

Fig. 3




E-96 series: 3 digits, $\pm 1\%$
First two digits for E-96 marking rule and 3rd letter for number of zeros

Fig. 4

AC0805 / AC1206 / AC1210 / AC2010 / AC2512


Both E-24 and E-96 series: 4 digits, $\pm 1\%$
First three digits for significant figure and 4th digit for number of zeros

Fig. 5

AC1218

E-24 series: 3 digits, $\pm 5\%$
First two digits for significant figure and 3rd digit for number of zeros

Fig. 6



Both E-24 and E-96 series: 4 digits, $\pm 1\%$
First three digits for significant figure and 4th digit for number of zeros

Fig. 7


NOTE

For further marking information, please refer to data sheet "Chip resistors marking". Marking of AC series is the same as RC series.

CONSTRUCTION

The resistors are constructed on top of an automotive grade ceramic body. Internal metal electrodes are added at each end and connected by a resistive glaze. The resistive glaze is covered by a lead-free glass. The composition of the glaze is adjusted to give the approximately required resistance value and laser trimming of this resistive glaze achieves the value within tolerance. The whole element is covered by a protective overcoat. Size 0603 and bigger is marked with the resistance value on top. Finally, the two external terminations (Ni / matte tin) are added, as shown in Fig.8.

OUTLINES

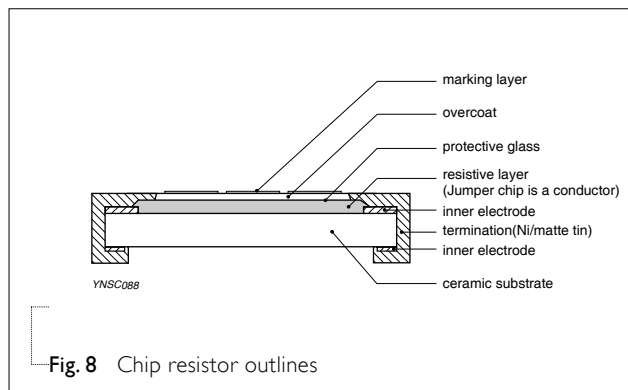

DIMENSIONS



Table I For outlines, please refer to Fig. 9

TYPE	L (mm)	W (mm)	H (mm)	l ₁ (mm)	l ₂ (mm)
AC0402	1.00 ±0.05	0.50 ±0.05	0.32 ±0.05	0.20 ±0.10	0.25 ±0.10
AC0603	1.60 ±0.10	0.80 ±0.10	0.45 ±0.10	0.25 ±0.15	0.25 ±0.15
AC0805	2.00 ±0.10	1.25 ±0.10	0.50 ±0.10	0.35 ±0.20	0.35 ±0.20
AC1206	3.10 ±0.10	1.60 ±0.10	0.55 ±0.10	0.45 ±0.20	0.40 ±0.20
AC1210	3.10 ±0.10	2.60 ±0.15	0.50 ±0.10	0.45 ±0.15	0.50 ±0.20
AC1218	3.10 ±0.10	4.60 ±0.10	0.55 ±0.10	0.45 ±0.20	0.40 ±0.20
AC2010	5.00 ±0.10	2.50 ±0.15	0.55 ±0.10	0.55 ±0.15	0.50 ±0.20
AC2512	6.35 ±0.10	3.10 ±0.15	0.55 ±0.10	0.60 ±0.20	0.50 ±0.20


For dimension, please refer to Table I

AC0402/0603/0805/1206/
1210/2010/2512

AC1218



Side view for all type



YNSC096

Fig. 9 Chip resistor dimensions

ELECTRICAL CHARACTERISTICS

Table 2

TYPE	RESISTANCE RANGE	CHARACTERISTICS					Jumper Criteria
		Operating Temperature Range	Max. Working Voltage	Max. Overload Voltage	Dielectric Withstanding Voltage	Temperature Coefficient of Resistance	
AC0402	5% (E24), 1% (E24/E96) 1 Ω to 10 M Ω Jumper < 0.05 Ω	-55 °C to +155 °C	50 V	100 V	100 V	1 $\Omega \leq R \leq 10 \Omega$, ± 200 ppm/°C 10 $\Omega < R \leq 10 \text{ M}\Omega$, ± 100 ppm/°C	Rated Current 1A Max. Current 2A
AC0603			50 V	100 V	100 V		Rated Current 1A Max. Current 2A
AC0805			150 V	300 V	300 V		Rated Current 2A Max. Current 5A
AC1206			200 V	400 V	500 V		Rated Current 2A Max. Current 10A
AC1210			200 V	500 V	500 V		Rated Current 2A Max. Current 10A
AC1218			200 V	500 V	500 V		Rated Current 6A Max. Current 10A
AC2010			200 V	500 V	500 V		Rated Current 2A Max. Current 10A
AC2512			200 V	500 V	500 V		Rated Current 2A Max. Current 10A

FOOTPRINT AND SOLDERING PROFILES

Recommended footprint and soldering profiles of AC-series is the same as RC-series. Please refer to data sheet "Chip resistors mounting".

PACKING STYLE AND PACKAGING QUANTITY

Table 3 Packing style and packaging quantity

PACKING STYLE	REEL DIMENSION	AC0402	AC0603	AC0805	AC1206	AC1210	AC1218	AC2010	AC2512
Paper/PE taping reel (R)	7" (178 mm)	10,000 20,000	5,000	5,000	5,000	5,000	---	---	---
	10" (254 mm)	20,000	10,000	10,000	10,000	---	---	---	---
	13" (330 mm)	50,000	20,000	20,000	20,000	20,000	---	---	---
Embossed taping reel (K)	7" (178 mm)	---	---	---	---	---	4,000	4,000	4,000

NOTE

I. For paper/PE/embossed tape and reel specifications/dimensions, please refer to data sheet "Chip resistors packing".

FUNCTIONAL DESCRIPTION

OPERATING TEMPERATURE RANGE

Range: -55 °C to +155 °C

POWER RATING

Each type rated power at 70 °C:

AC0402=1/16 W (0.0625W)

AC0603=1/10 W (0.1W)

AC0805=1/8 W (0.125W)

AC1206=1/4 W (0.25W)

AC1210=1/2 W (0.5W)

AC1218=1 W

AC2010=3/4 W (0.75W)

AC2512=1 W

RATED VOLTAGE

The DC or AC (rms) continuous working voltage corresponding to the rated power is determined by the following formula:

$$V = \sqrt{P \times R}$$

Or Maximum working voltage whichever is less

Where

V = Continuous rated DC or AC (rms) working voltage (V)

P = Rated power (W)

R = Resistance value (Ω)

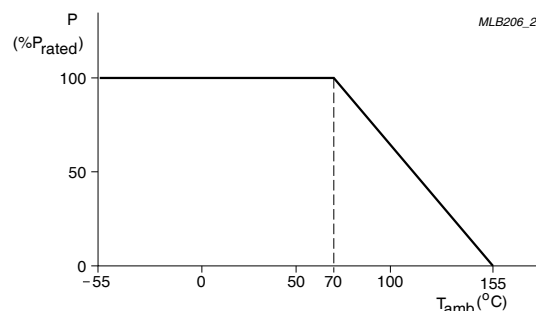


Fig. 10 Maximum dissipation (P_{max}) in percentage of rated power as a function of the operating ambient temperature (T_{amb})

TESTS AND REQUIREMENTS**Table 4** Test condition, procedure and requirements

TEST	TEST METHOD	PROCEDURE	REQUIREMENTS
High Temperature Exposure	AEC-Q200 Test 3 MIL-STD-202 Method 108	1,000 hours at $T_A = 125\text{ }^{\circ}\text{C}$, unpowered	$\pm(1.0\%+0.05\ \Omega)$ $<50\text{ m}\Omega$ for Jumper
Moisture Resistance	AEC-Q200 Test 6 MIL-STD-202 Method 106	Each temperature / humidity cycle is defined at 8 hours (method 106F), 3 cycles / 24 hours for 10d. with $25\text{ }^{\circ}\text{C}$ / $65\text{ }^{\circ}\text{C}$ 95% R.H, without steps 7a & 7b, unpowered Parts mounted on test-boards, without condensation on parts	$\pm(0.5\%+0.05\ \Omega)$ for 1% tol. $\pm(2.0\%+0.05\ \Omega)$ for 5% tol. $<100\text{ m}\Omega$ for Jumper
Biased Humidity	AEC-Q200 Test 7 MIL-STD-202 Method 103	1,000 hours; $85\text{ }^{\circ}\text{C}$ / 85% RH 10% of operating power Measurement at 24 ± 4 hours after test conclusion.	$\pm(1.0\%+0.05\ \Omega)$ $<100\text{ m}\Omega$ for Jumper
Operational Life	AEC-Q200 Test 8 MIL-STD-202 Method 108	1,000 hours at $125\text{ }^{\circ}\text{C}$, derated voltage applied for 1.5 hours on, 0.5 hour off, still-air required	$\pm(1.0\%+0.05\ \Omega)$ $<100\text{ m}\Omega$ for Jumper
Resistance to Soldering Heat	AEC-Q200 Test 15 MIL-STD-202 Method 210	Condition B, no pre-heat of samples Lead-free solder, $260\pm 5\text{ }^{\circ}\text{C}$, 10 ± 1 seconds immersion time Procedure 2 for SMD: devices fluxed and cleaned with isopropanol	$\pm(0.5\%+0.05\ \Omega)$ for 1% tol. $\pm(1.0\%+0.05\ \Omega)$ for 5% tol. $<50\text{ m}\Omega$ for Jumper No visible damage
Thermal Shock	AEC-Q200 Test 16 MIL-STD-202 Method 107	$-55/+125\text{ }^{\circ}\text{C}$ Number of cycles is 300. Devices mounted Maximum transfer time is 20 seconds. Dwell time is 15 minutes. Air – Air	$\pm(1.0\%+0.05\ \Omega)$ $<50\text{ m}\Omega$ for Jumper
ESD	AEC-Q200 Test 17 AEC-Q200-002	Human Body Model, 1 pos. + 1 neg. discharges 0402/0603: 1 KV, 0805 and above: 2 KV	$\pm(3.0\%+0.05\ \Omega)$ $<50\text{ m}\Omega$ for Jumper

TEST	TEST METHOD	PROCEDURE	REQUIREMENTS
Solderability - Wetting	AEC-Q200 Test 18 J-STD-002	Electrical Test not required Magnification 50X SMD conditions: (a) Method B, aging 4 hours at 155 °C dry heat, dipping at 235±3 °C for 5±0.5 seconds. (b) Method B, steam aging 8 hours, dipping at 215±3 °C for 5±0.5 seconds. (c) Method D, steam aging 8 hours, dipping at 260±3 °C for 7±0.5 seconds.	Well tinned (≥95% covered) No visible damage
Board Flex	AEC-Q200 Test 21 AEC-Q200-005	Chips mounted on a 90mm glass epoxy resin PCB (FR4) Bending for 0402: 5 mm 0603/0805: 3 mm 1206 and above: 2 mm Holding time: minimum 60 seconds	±(1.0%+0.05 Ω) <50 mΩ for Jumper
Temperature Coefficient of Resistance (T.C.R.)	IEC 60115-1 4.8	At +25/-55 °C and +25/+125 °C Formula: $T.C.R = \frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^6 \text{ (ppm/°C)}$ Where t ₁ =+25 °C or specified room temperature t ₂ =-55 °C or +125 °C test temperature R ₁ =resistance at reference temperature in ohms R ₂ =resistance at test temperature in ohms	Refer to table 2
Short Time Overload	IEC60115-1 4.13	2.5 times of rated voltage or maximum overload voltage whichever is less for 5 sec at room temperature	±(1.0%+0.05 Ω) <50 mΩ for Jumper

REVISION HISTORY

REVISION	DATE	CHANGE NOTIFICATION	DESCRIPTION
Version 2	Feb. 10, 2012		- Jumper criteria added - AC1218 marking and outline figure updated
Version 1	Feb. 01, 2011	-	- Case size 1210, 1218, 2010, 2512 extended - Test method and procedure updated - Packing style of 7D added
Version 0	Nov. 10, 2010	-	- First issue of this specification

LEGAL DISCLAIMER

Yageo, its distributors and agents (collectively, “Yageo”), hereby disclaims any and all liabilities for any errors, inaccuracies or incompleteness contained in any product related information, including but not limited to product specifications, datasheets, pictures and/or graphics. Yageo may make changes, modifications and/or improvements to product related information at any time and without notice.

Yageo makes no representation, warranty, and/or guarantee about the fitness of its products for any particular purpose or the continuing production of any of its products. To the maximum extent permitted by law, Yageo disclaims (i) any and all liability arising out of the application or use of any Yageo product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for a particular purpose, non-infringement and merchantability.

Yageo statements regarding the suitability of products for certain types of applications are based on Yageo’s knowledge of typical operating conditions for such types of applications in a generic nature. Such statements are neither binding statements of Yageo nor intended to constitute any warranty concerning the suitability for a specific customer application or use. They are intended for use only by customers with requisite knowledge and experience for determining whether Yageo products are the correct products for their application or use. In addition, unpredictable and isolated cases of product failure may still occur, therefore, customer application or use of Yageo products which requires higher degree of reliability or safety, shall employ additional protective safeguard measures to ensure that product failure would not result in personal injury or property damage.

Yageo products are not designed for application or use in medical, life-saving, or life-sustaining devices or for any other application or use in which the failure of Yageo products could result in personal injury or death. Customers using or selling Yageo products not expressly indicated for above-mentioned purposes shall do so at their own risk and agree to fully indemnify Yageo and hold Yageo harmless.

Information provided here is intended to indicate product specifications only. Yageo reserves all the rights for revising this content without further notification, as long as products are unchanged. Any product change will be announced by PCN.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Yageo:

AC0402FR-7D2K74L	AC0402FR-7D301RL	AC0402FR-7D23R7L	AC0402FR-7D3K65L	AC0402FR-7D887RL
AC0402FR-7D787RL	AC0402FR-7D18R2L	AC0402FR-7D28K7L	AC0402FR-7D66K5L	AC0402FR-7D12R4L
AC0402FR-7D249RL	AC0402FR-7D8K87L	AC0402FR-7D475KL	AC0402FR-7D22K6L	AC0402FR-7D56K2L
AC0402FR-7D121KL	AC0402FR-7D309KL	AC0402FR-7D562RL	AC0402FR-7D174KL	AC0402FR-7D2K21L
AC0402FR-7D10K7L	AC0402FR-7D475RL	AC0402FR-7D255RL	AC0402FR-7D25K5L	AC0402FR-7D178RL
AC0402FR-7D41K2L	AC0402FR-7D665RL	AC0402FR-7D4K99L	AC0402FR-7D178KL	AC0402FR-7D2K26L
AC0402FR-7D14K3L	AC0402FR-7D3K24L	AC0402FR-7D154KL	AC0402FR-7D22R1L	AC0402FR-7D60K4L
AC0402FR-7D17K4L	AC0402FR-7D442KL	AC0402FR-7D3K83L	AC0402FR-7D215KL	AC0402FR-7D357KL
AC0402FR-7D10K5L	AC0402FR-7D681RL	AC0402FR-7D243KL	AC0402FR-7D3K32L	AC0402FR-7D619KL
AC0402FR-7D3K09L	AC0402FR-7D124RL	AC0402FR-7D1K21L	AC0402FR-7D23K7L	AC0402FR-7D196KL
AC0402FR-7D44R2L	AC0402FR-7D19K6L	AC0402FR-7D54K9L	AC0402FR-7D169KL	AC0402FR-7D49R9L
AC0402FR-7D9K09L	AC0402FR-7D232KL	AC0402FR-7D26K1L	AC0402FR-7D27R4L	AC0402FR-7D51R1L
AC0402FR-7D61R9L	AC0402FR-7D12K4L	AC0402FR-7D3R01L	AC0402FR-7D162KL	AC0402FR-7D316KL
AC0402FR-7D24K3L	AC0402FR-7D43K2L	AC0402FR-7D301KL	AC0402FR-7D7K87L	AC0402FR-7D1K96L
AC0402FR-7D1K05L	AC0402FR-7D383KL	AC0402FR-7D64K9L	AC0402FR-7D8K25L	AC0402FR-7D16K5L
AC0402FR-7D90K9L	AC0402FR-7D1K47L	AC0402FR-7D4K22L	AC0402FR-7D12K1L	AC0402FR-7D590RL
AC0402FR-7D140RL	AC0402FR-7D4K42L	AC0402FR-7D8K66L	AC0402FR-7D34KL	AC0402JR-7D0RL
AC0402FR-7D9K76L	AC0402FR-7D23K2L	AC0402FR-7D909RL	AC0402FR-7D523RL	AC0402FR-7D47K5L
AC0402FR-7D205RL	AC0402FR-7D2K32L	AC0402FR-7D453RL	AC0402FR-7D31K6L	AC0402FR-7D28KL
AC0402FR-7D464RL	AC0402FR-7D1K33L	AC0402FR-7D46R4L	AC0402FR-7D2K05L	AC0402FR-7D6K98L