SAMZO | REAC/ROHS

REV	ECN NO	DESRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2018.06.14



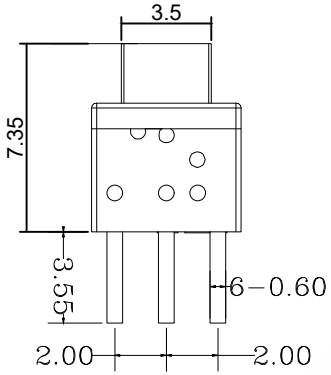



技术参数
1.额定电流：DC30V 0.1A
2.耐高压：交流250V(50-60赫兹）持续1分钟.
3.接触阻抗：500毫欧max.
4.绝缘阻抗：100兆欧min .500V DC.
5.操作力：180±50gf
6.全行程：2.0mm±0.2mm
7.LOCK行程：1.8mm±0.3mm
8.运行类型：自锁/无锁
9.操作寿命：10.000次.







A.系列:20:5.8-6P系列
B.贴装方式:1-180° DIP
C.主体高度:075:7.5mm
D.性能特性:0:自锁/1：无锁
E:使用寿命:1:10,000万次
F:模具编码:0-常规
G:主体材质:1-LCP/2-NYLON

20 1 075 1 1 0 *
Ⓐ Ⓑ Ⓒ Ⓓ Ⓔ Ⓕ Ⓖ



电路图



印刷电路板焊接处尺寸图

ITEM	DESCRIPTION	MATERIAL	QTY	FINSH/COLOR					
6	导芯	LCP	1	黑色					
5	盖子	NYLON	1	黑色				GENERAL TOLERANCE	
4	弹片	铜合金	1	素材				≥0~2<	±0.15
3	触点	银合金	1	素材	DESIGN	WANGGUIFA	2018.06.12	≥2~5<	±0.25
2	底座	LCP	1	灰色	CHECKED	ZHENGUILAN	2018.06.12	≥0~2<	±0.15
1	端子	黄铜	2	镀银	APPROVED	LILIANJIANG	2018.06.14	≥5	±0.35

FIRST VIEW



SCALE 1:1 UNIT mm

The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts.
WWW.KKK-JP.COM

SAMZO COMPONENTS
Electronic switch and connector manufacturer

TITLE:：5.8*5.8-6PIN无锁平头按键
DWG NO：201075-P003
PART NO：201075150102
MODEL NO：201075110-*
NAME：PUSH SWITCH