
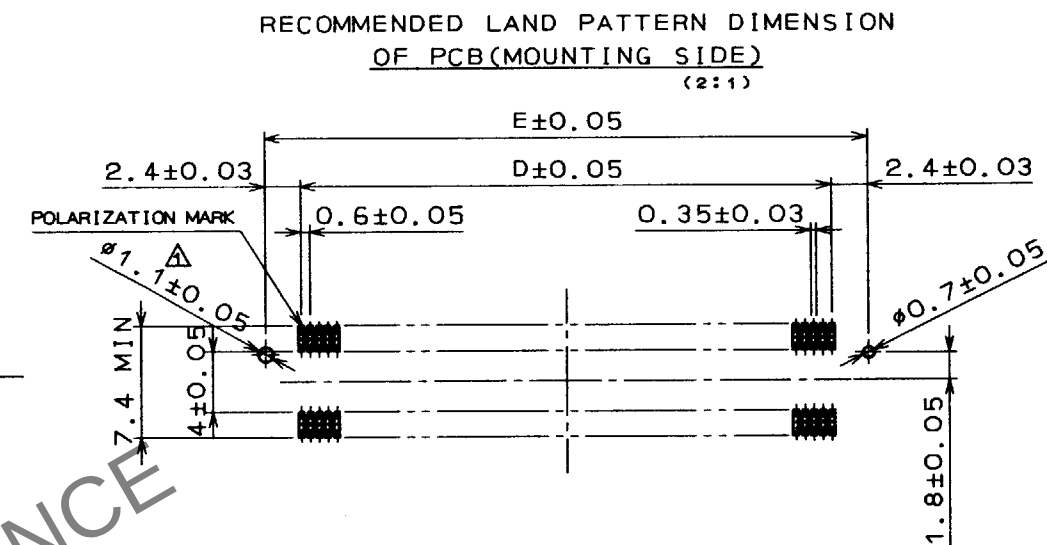


TO
PCM

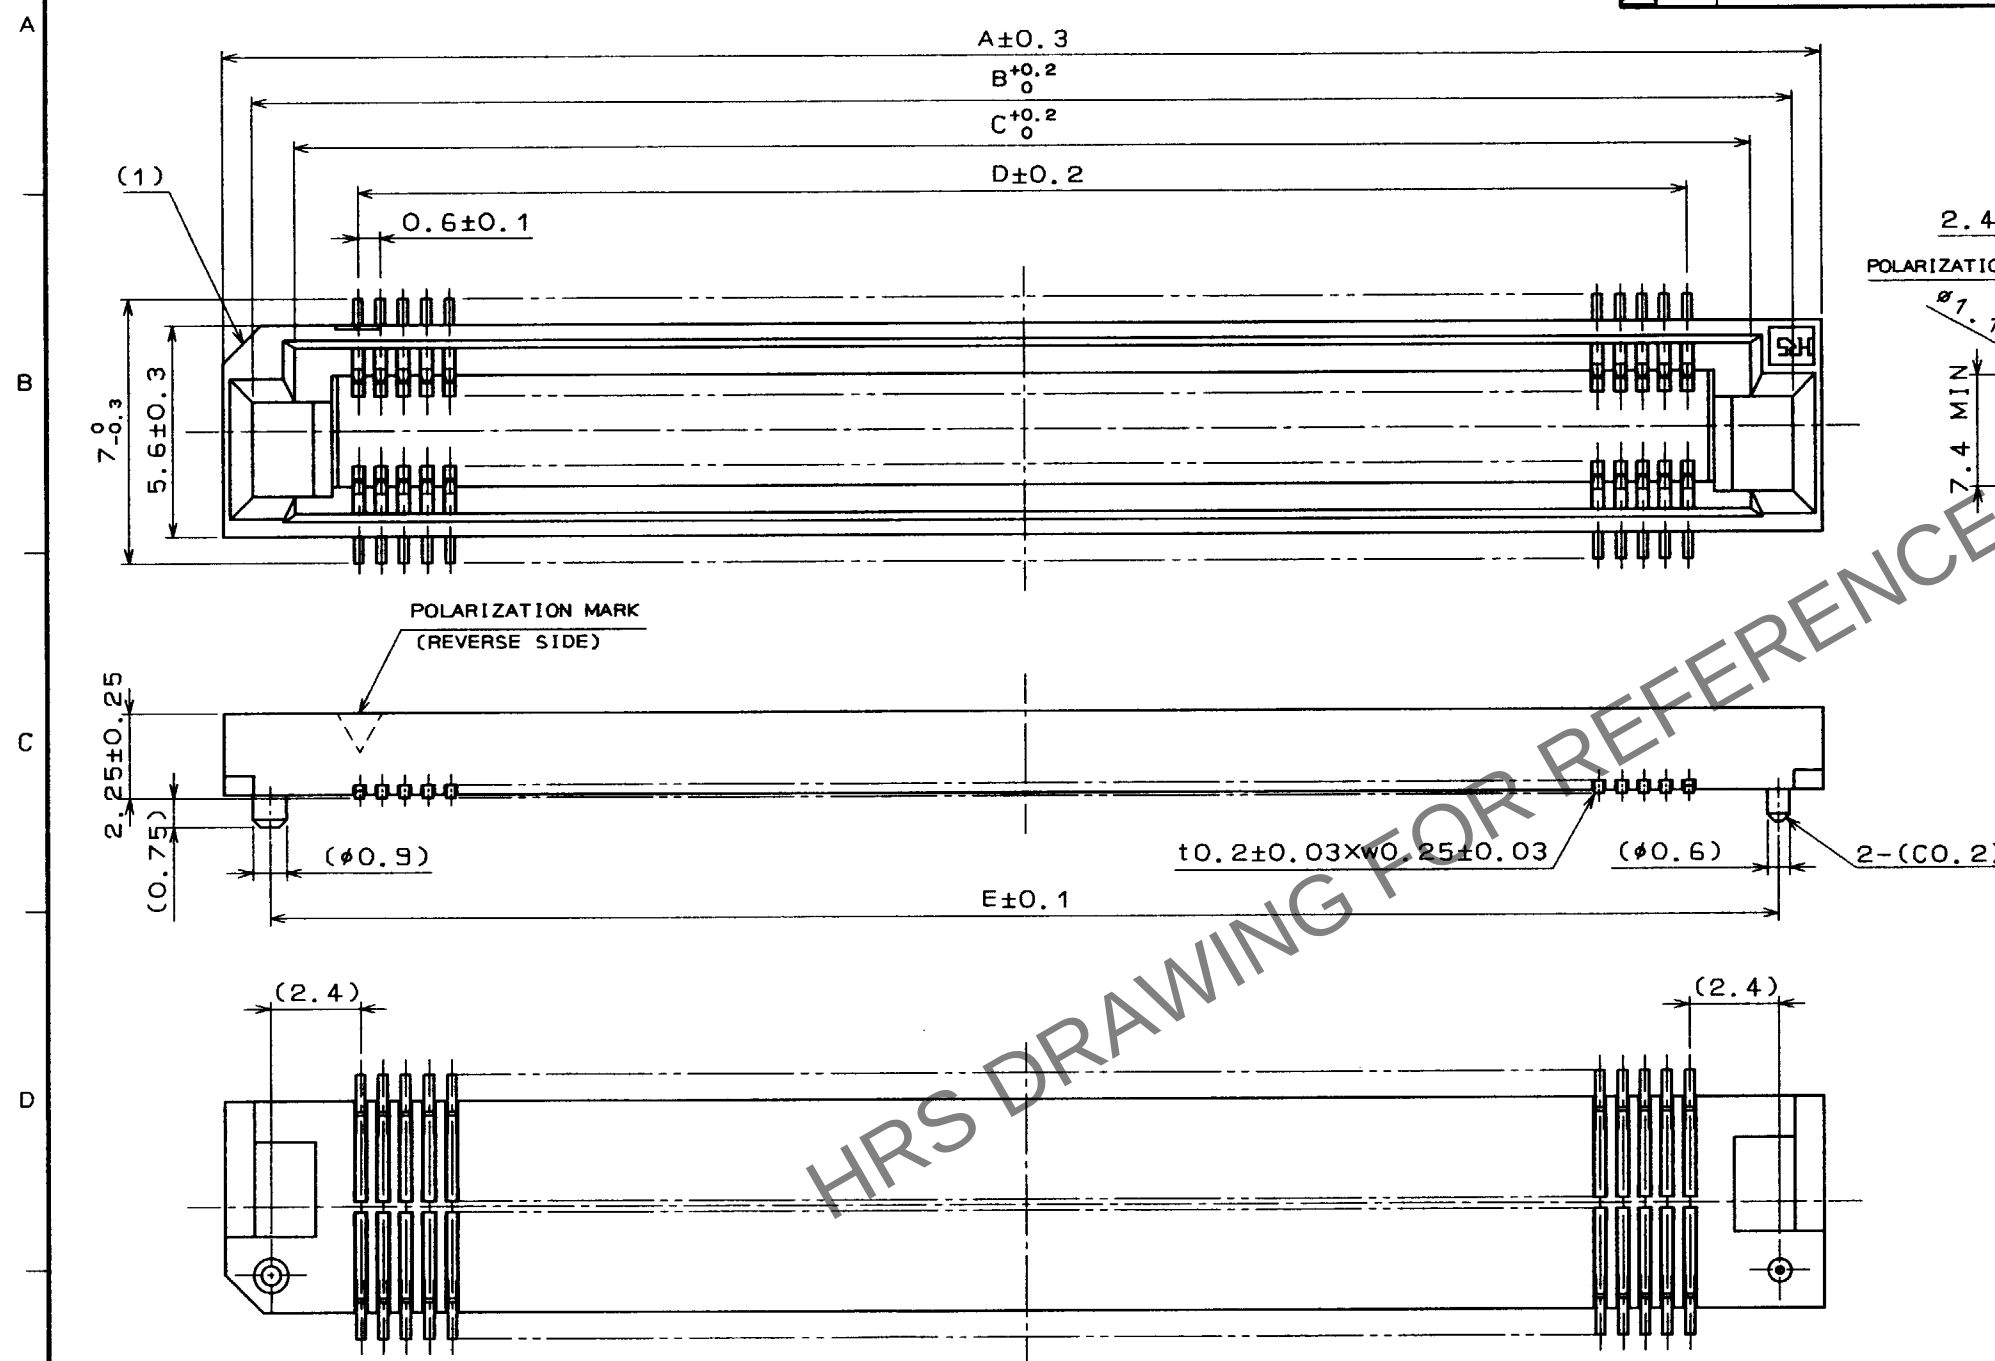

NUMBER OF CONTACT	PART NO.	CODE NO.	DRAWING NO.	A	B	C	D	E
60	FX8- 60S-SV(22)	CL578-0201-5-22	ADC3-150674-02	24.6	23.05	20.8	17.4	22.2
80	FX8- 80S-SV(22)	CL578-0203-0-22	ADC3-150740-02	30.6	29.05	26.8	23.4	28.2
90	FX8- 90S-SV(22)	CL578-0204-3-22	ADC3-150675-02	33.6	32.05	29.8	26.4	31.2

- NOTE 1 READ CO-PLANARITY SHALL BE 0.1mm.
2 FOR DETAILS,SEE THE SECTION CONCERNING THE DELIVERY FORM ON NEXT PAGE.
3 FOR MODIFICATION,ETC.,PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED DEPENDS ON CIRCUMSTANCES.

2	PHOSPHOR BRONZE	CONTACT AREA:GOLD(0.1μm) OVER NICKEL OTHERS:GOLD(FLASH) OVER NICKEL	1	PPS	LIGHT BROWN (UL94V-0)
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED
		S.Morita	J.Matsukawa	M.Tomita	Y.Yoshimura
		950420	950420	950420	950420
DRAWING NO. EDC3-150730-02		PART NO. FX8-***S-SV(22)			
SCALE 5 : 1		CODE NO. CL578			
UNITS mm		1/2			

Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


TO
PCM

A
B
C
D
E
F

1 2 3 4 5 6 7 8

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE


DIRECTION OF REMOVAL

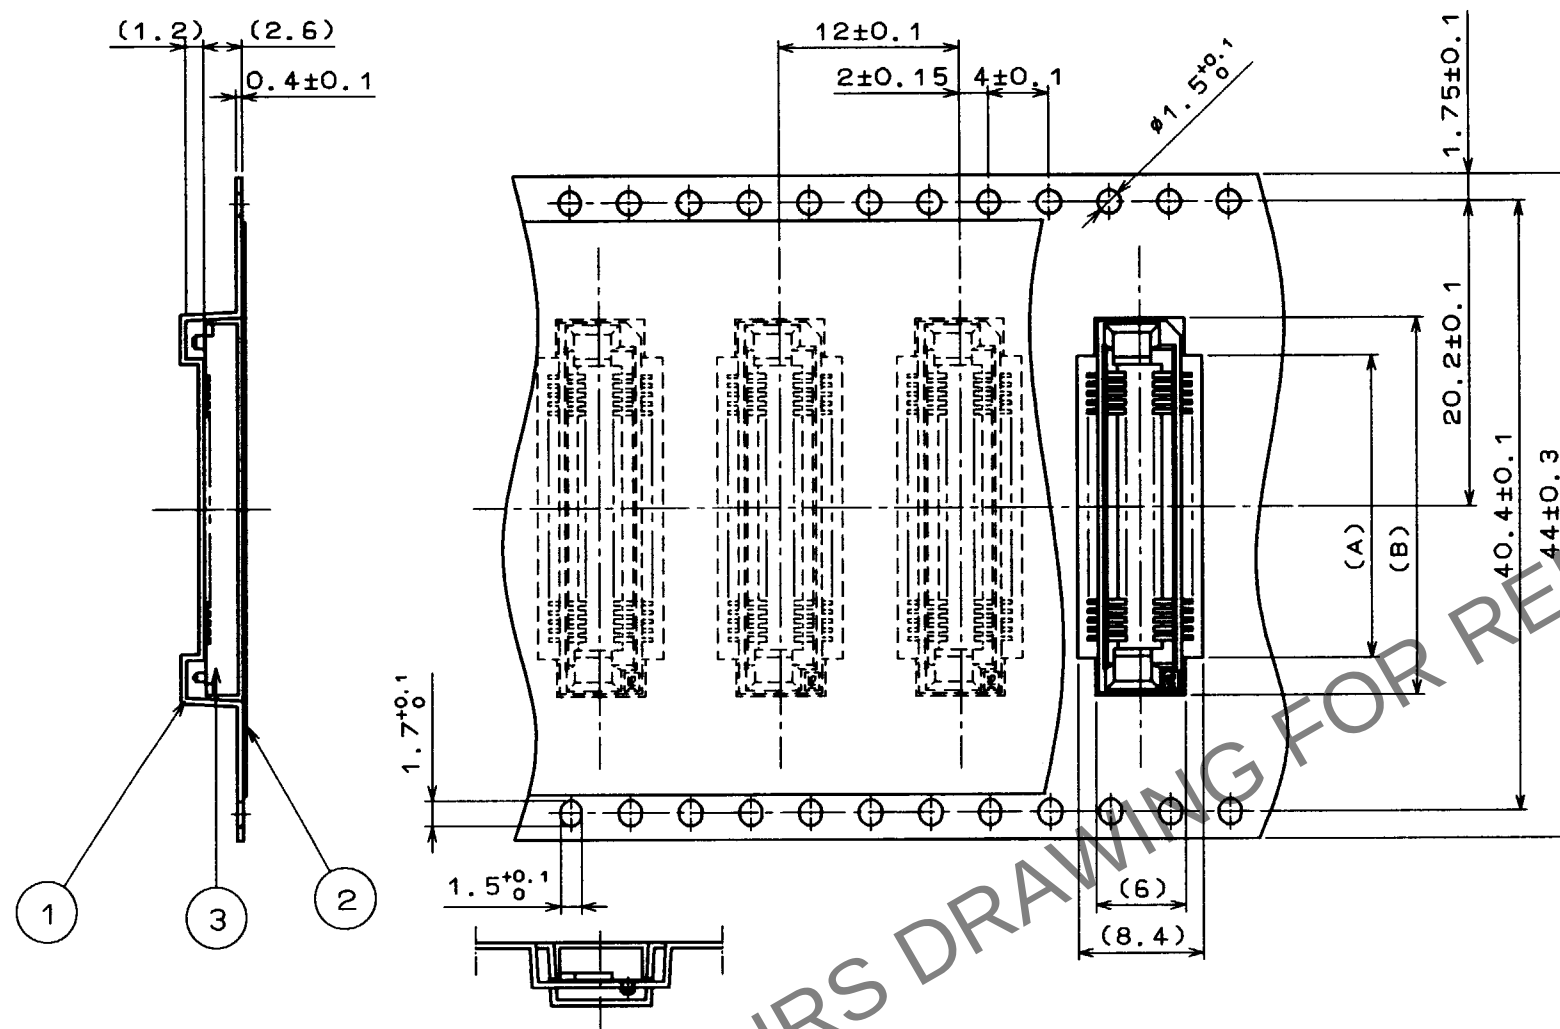

REEL CONDITION DIMENSIONS DIAGRAM(FREE)

NUMBER OF CONTACT	A	B
60	20	25
80	26	31
90	29	34

NOTE 1 1 REEL CONSISTS OF 1,000 PIECES.

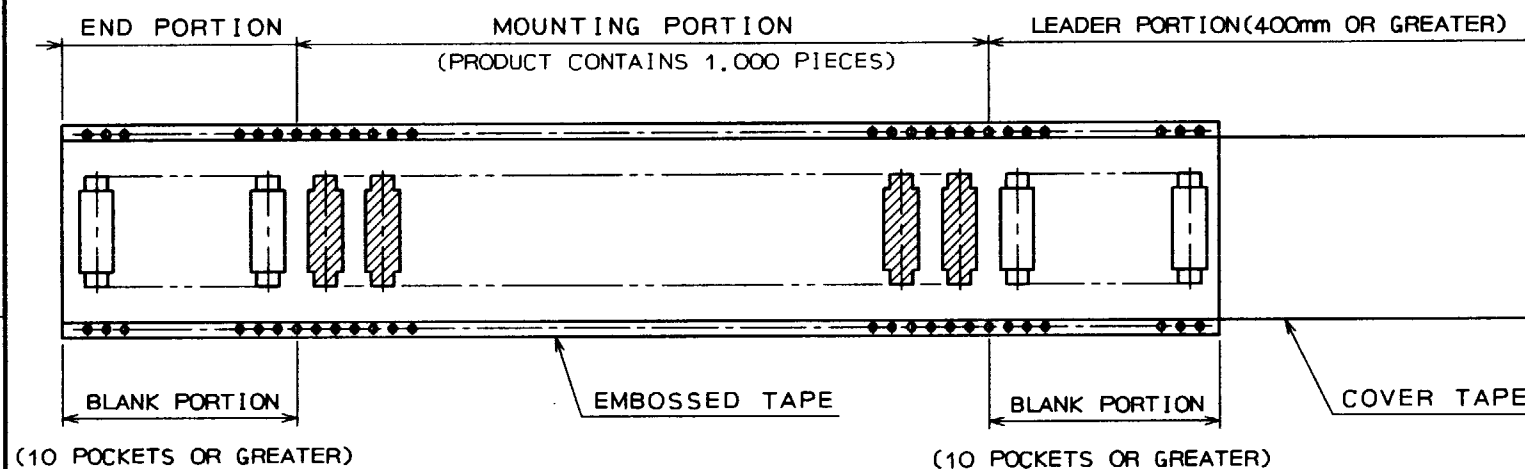

2	POLYETHYLENE	COVER TAPE			
1	POLYSTYRENE	EMBOSSSED TAPE	3	(CONNECTOR)	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED
SCALE 2 : 1		DRAWING NO. EDC3-150730-02		PART NO. FX8-***S-SV(22)	
UNITS mm		HRS HIROSE ELECTRIC CO., LTD.		CODE NO. CL578	