

HD10-9-1939P-P080

✓ ACTIVE

DEUTSCH | DEUTSCH HD, DEUTSCH HD10

TE Internal #: HD10-9-1939P-P080

Housing for Male Terminals, Wire-to-Panel, 9 Position, Sealable, Green, Wire & Cable, Power, Panel Mount, -55 – 125 °C [-67 – 257 °F], Hybrid

[View on TE.com >](#)



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH HD10 Housings



Connector System: **Wire-to-Panel**

Number of Positions: **9**

Connector & Housing Type: **Housing for Male Terminals**

Sealable: **Yes**

Mating Pin Diameter: **1.6 mm [.063 in]**

[All DEUTSCH HD10 Housings \(53\)](#)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Circular
Connector System	Wire-to-Panel
Connector & Housing Type	Housing for Male Terminals
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	Integrated in Housing

Configuration Features

Blank Cavity Position	0
Connector Modification	J1939 Type II
Number of Positions	9

Electrical Characteristics

--	--



Operating Voltage	250 VAC
-------------------	---------

Nominal Voltage Architecture	250 V
------------------------------	-------

Body Features

Cable Exit Angle	180°
------------------	------

Primary Product Color	Green
-----------------------	-------

Contact Features

Contact Size	Size 16
--------------	---------

Contact Type	Pin
--------------	-----

Mating Pin Diameter	1.6 mm[.063 in]
---------------------	-----------------

Contact Current Rating (Max)	13 A
------------------------------	------

Mechanical Attachment

Terminal Position Assurance	No
-----------------------------	----

Strain Relief	Without
---------------	---------

Mating Alignment Type	Polarizing Rib
-----------------------	----------------

Mating Alignment	With
------------------	------

Connector Mounting Type	Panel Mount
-------------------------	-------------

Housing Features

Housing Material	PA GF
------------------	-------

Dimensions

Connector Height	42.2 mm[1.66 in]
------------------	------------------

Product Width	36.5 mm[1.44 in]
---------------	------------------

Product Length	36.5 mm[1.44 in]
----------------	------------------

Compatible Insulation Diameter Range	2.5 – 3.8 mm[.1 – .15 in]
--------------------------------------	---------------------------

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
-----------------------------	----------------

Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Degree of Protection	IP68, IP6K9K
----------------------	--------------

UL Flammability Rating	20mm Flame Test per Standard UL-94
------------------------	------------------------------------

Packaging Features



Packaging Quantity	1
Packaging Method	Package
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5% in Component Part) Decamethylcyclopentasiloxane (D5) (.5% in Component Part) Article Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-H3910-RC1748
Receptacle Dust Caps — DEUTSCH HD10



TE Part # HDC14-3
DUST CAP



TE Part # CAT-H3910-CH8172
DEUTSCH HD10 Housings



TE Part # CAT-D48-SP729
DEUTSCH Sealing Plugs




TE Part # CAT-D48-ST273
DEUTSCH Solid Contacts



TE Part # CAT-J67-DSCC16
DEUTSCH Size 16 Crimp Contacts



TE Part # HD10-9-GKT
GASKET, 9SZ, BLK, HD10

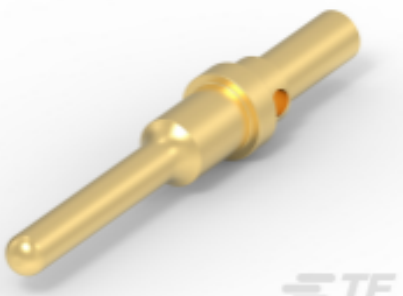

TE Part # 2300908-1
0460-003-16329, PIN, SOLID, 20-24AWG, AU



TE Part # HD10-9BT
BOOT, 9P, PLG/REC, ST, GRY



TE Part # HD10-9BT-BK
BOOT, 9P, PLG/REC, ST, BLK

TE Part # CAT-D48-SFT273
DEUTSCH Stamped and Formed Contacts

TE Part # HD10-9BT-BK-430
BOOT, 9P, PLG/REC, ST, BLK

Also in the Series | **DEUTSCH HD**



Automotive Connector Caps & Covers (32)



Automotive Housings(768)



Connector Backshells(29)



Connector Seals & Cavity Plugs(10)




Connector Strain Relief(5)



Insertion & Extraction Tools(11)



Other Automotive Connector Accessories(11)

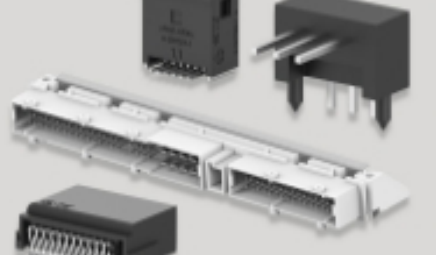

PCB Headers & Receptacles(1)

Also in the Series | **DEUTSCH HD10**



Automotive Connector Caps & Covers (17)



Automotive Housings(53)



Connector Backshells(17)



PCB Headers & Receptacles(1)


Customers Also Bought



TE Part #HD17-9-1939S-P080
PLG, 9P, GRN, N, THREAD, J1939, TYPE 2



TE Part #DT04-12PC-BL04
REC, 12P, GRN, N, ENH KEY, FLANGE, C

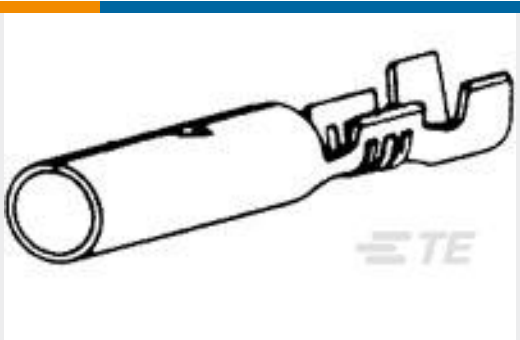


TE Part #61412-2
SHUR PLUG 180 RECEPTACLE 18-14 AWG TPBR



TE Part #1443997-1
BASE ASSEMBLY, 60 POSITION, BB



TE Part #DT06-12SC-CE05
PLG, 12P, GRN, E, SEAL RET, ENH KEY, CAP, C

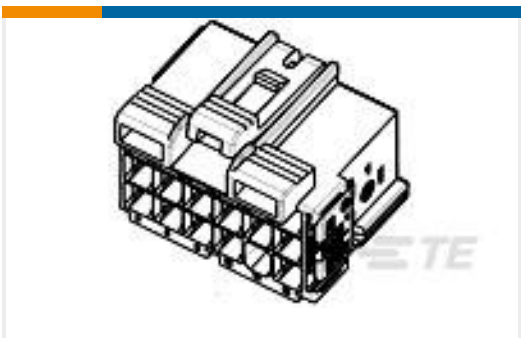

TE Part #1241581-1
JUN-POW-TIM HOUSING 17POS



TE Part #927771-9
JPT REC 2.8 Contact SRC Au



TE Part #2098164-4
Cover, 60 Pos, No Fuse Graphic or Holder



TE Part #2-34126-2
TERMINAL, SOLIS R 16-14 3/8



TE Part #3-2112780-1
18POS, MIXED, REC HSG, ASSY, SEALED

Documents

Product Drawings

REC, 9P, GRN, N, FLANGE, J1939, TYPE 2

English

REC, 9P, GRN, N, FLANGE, J1939, TYPE 2

English

CAD Files

Customer View Model

ENG_CVM_CVM_HD10-9-1939P-P080_99.2d_dxf.zip



English

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_HD10-9-1939P-P080_99.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_HD10-9-1939P-P080_99.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[DEUTSCH HD10 CONNECTOR SERIES](#)

English

[ICT Terminals and Connectors Catalogue](#)

English

[CONNECTOR SELECTOR](#)

English

Product Specifications

[Application Specification](#)

English

Agency Approvals

[UL Report](#)

English