




Part Number : [2128252502](#)
Product Description : DDR4 DIMM Socket, Vertical Surface Mount, 0.76µm Gold Plating, 288 Circuits, with 2.00mm Solder Tab, Black Housing, Black Latch, with Pick-and-Place Tape
Series Number : 212825
Status : Active
Product Category : Memory Module Connectors

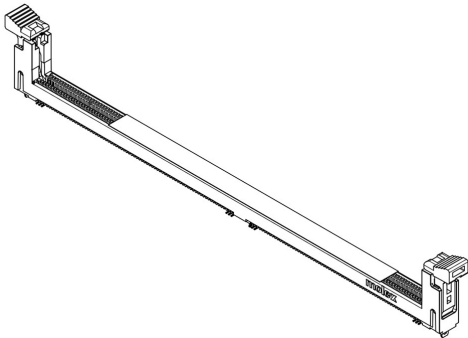

Documents & Resources

Drawings
[Drawing 2128252502_sd.pdf](#)

3D Models and Design Files
[3D Model 2128252502_stp.zip](#)

Specifications
[Application Specification AS-78730-001-001.pdf](#)
[Application Specification AS-78730-002-001.pdf](#)
[Product Specification PS-78730-001-001.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)4144-DC (27 June 2024)
EU RoHS	Compliant per EU 2015/863

Multiple Part Product Compliance Statements
- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	Active
Category	Memory Module Connectors
Series	212825
Description	DDR4 DIMM Socket, Vertical Surface Mount, 0.76µm Gold Plating, 288 Circuits, with 2.00mm Solder Tab, Black Housing, Black Latch, with Pick-and-Place Tape
Component Type	Socket
JEDEC Outline	MO-309
Product Family	DDR4 DIMM Sockets
Product Name	DDR4 DIMM
UPC	193264120963

Electrical

Current - Maximum per Contact	0.75A
Voltage - Maximum	29V AC (RMS)/DC

Physical

Circuits (Loaded)	288
Circuits (maximum)	288
Durability (mating cycles max)	25
Entry Angle	Vertical (Top Entry)
Housing Color	Black
Keying to Mating Part	None
Latch Color	Black
Material - Metal	Copper Alloy

Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Polyamide
Net Weight	6.520/g
Packaging Type	Tray
PCB Locator	Yes
PCB Retention	Yes
Pitch - Mating Interface	0.85mm
Pitch - Termination Interface	0.85mm
Plating min - Mating	0.762μm
Plating min - Termination	2.540μm
Temperature Range - Operating	-55° to +85°C
Termination Interface Style	Surface Mount