



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DRC Housings



Connector System: **Wire-to-Wire**
Number of Positions: **40**
Connector & Housing Type: **Housing for Male Terminals**
Centerline (Pitch): **5.49 mm [.216 in]**
Sealable: **Yes**

[All DEUTSCH DRC Housings \(117\)](#)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Male Terminals
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	Integrated in Housing

Configuration Features

Blank Cavity Position	0
Number of Positions	40
Number of Rows	4

Electrical Characteristics

--	--



Operating Voltage	250 VAC
-------------------	---------

Nominal Voltage Architecture	250 V
------------------------------	-------

Body Features

Cable Exit Angle	180°
------------------	------

Primary Product Color	Black
-----------------------	-------

Connector & Keying Code	D
-------------------------	---

Contact Features

Contact Size	Size 16
--------------	---------

Contact Type	Pin
--------------	-----

Mating Pin Diameter	1.59 mm[.063 in]
---------------------	------------------

Contact Current Rating (Max)	13 A
------------------------------	------

Mechanical Attachment

Terminal Position Assurance	No
-----------------------------	----

Strain Relief	Add By Accessory
---------------	------------------

Mating Alignment Type	Keyed
-----------------------	-------

Mating Alignment	With
------------------	------

Connector Mounting Type	Panel Mount
-------------------------	-------------

Housing Features

Housing Material	PPS GF
------------------	--------

Centerline (Pitch)	5.49 mm[.216 in]
--------------------	------------------

Dimensions

Connector Height	53.29 mm[2.098 in]
------------------	--------------------

Product Width	97.54 mm[3.84 in]
---------------	-------------------

Product Length	43.15 mm[1.699 in]
----------------	--------------------

Row-to-Row Spacing	5.49 mm[.216 in]
--------------------	------------------

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
-----------------------------	----------------

Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Degree of Protection	IP68, IP6K9K
----------------------	--------------



Compatible With Agency/Standards Products	SAE J2030
UL Flammability Rating	20mm Flame Test per Standard UL-94

Packaging Features

Packaging Quantity	60
Packaging Method	Box

Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

DRC12-40PD

Housing for Male Terminals, Wire-to-Wire, 40 Position, 5.49 mm [.216 in] Centerline, Sealable, Black, Wire & Cable, Power, Panel Mount




TE Part # CAT-D48-ST273
DEUTSCH Solid Contacts




TE Part # CAT-J67-DSCC16
DEUTSCH Size 16 Crimp Contacts




TE Part # DRC40-GKT
GASKET, 40P, BLK, DRC16



TE Part # DRC40-BT
BOOT, 40P, 16SZ, PLG/REC, ST, BLK

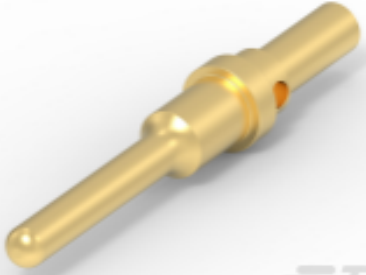

TE Part # 2300908-1
0460-003-16329, PIN, SOLID, 20-24AWG, AU

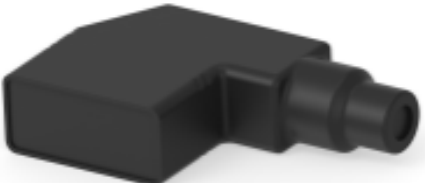

TE Part # DRC40-BT-90DEG
BOOT, 40P, 16SZ, PLG/REC, RA, BLK



TE Part # CAT-D48-SP729
DEUTSCH Sealing Plugs



TE Part # CAT-D799-CH8172
DEUTSCH DRC Housings




TE Part # 0411-291-1405
EXT TOOL, SIZE 16, 14-16 AWG, N, GRN




TE Part # 0411-204-1605
EXT TOOL, SIZE 16, 16-18 AWG, N, DRK BLU




TE Part # 0504-001-4001
DUST CAP, 40P, REC, BLK, DRC16

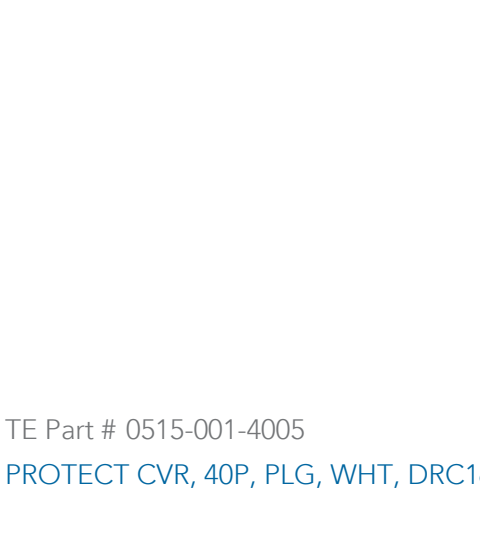

TE Part # 0515-001-4005
PROTECT CVR, 40P, PLG, WHT, DRC16

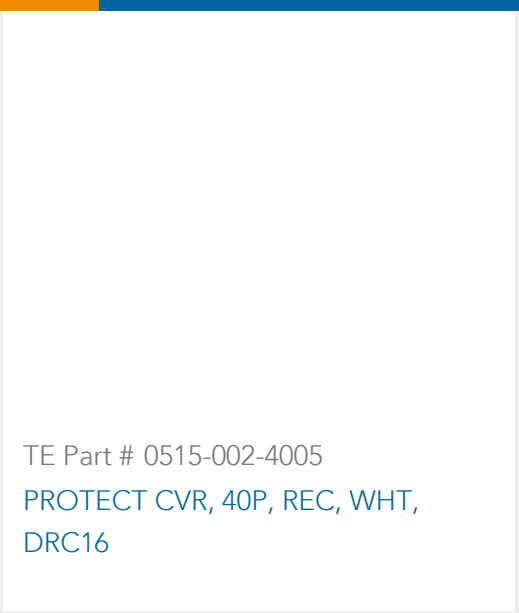

TE Part # 0515-002-4005
PROTECT CVR, 40P, REC, WHT, DRC16

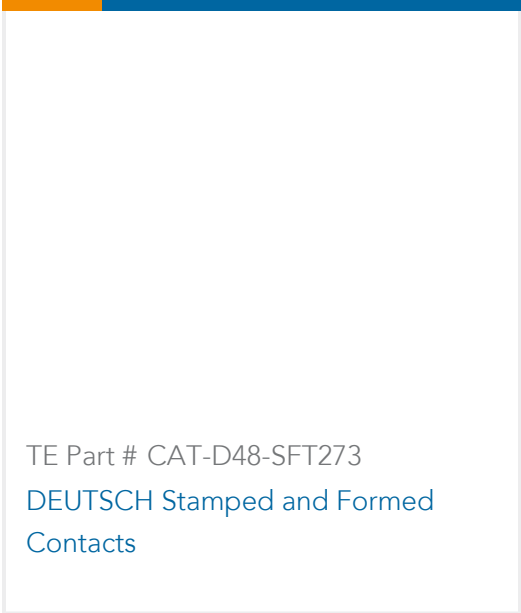

TE Part # CAT-D48-SFT273
DEUTSCH Stamped and Formed Contacts

Also in the Series | **DEUTSCH DRC**



Automotive Housings(117)



Connector Backshells(6)



Connector Strain Relief(3)



Insertion & Extraction Tools(7)

DRC12-40PD

Housing for Male Terminals, Wire-to-Wire, 40 Position, 5.49 mm [.216 in] Centerline, Sealable, Black, Wire & Cable, Power, Panel Mount



PCB Headers & Receptacles(44)

Customers Also Bought



TE Part #DRC12-40PB
DEUTSCH DRC Housings




TE Part #2273107-4
M12 Y conn Male to 2xM12 Female A



TE Part #DT6P-DC
PROTECT CVR, 6P, REC, GRY, DT



TE Part #1452324-3
TAB HOUSING 2.8MM, 4+6POS
SEALED

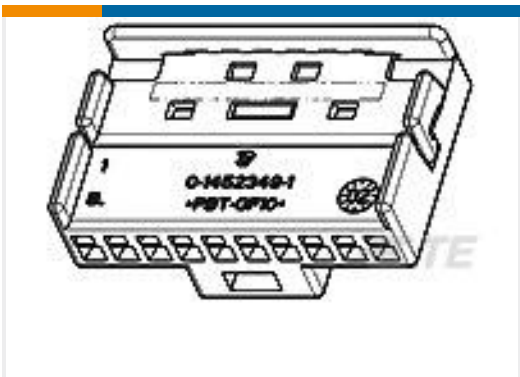

TE Part #1452349-1
10POS MQS REC



TE Part #YHV280-2PM-P-4MM-E
HVA280-2phm,pass,4sqmm,Key E



TE Part #HD44-24-16PN
KT RC HD30 24 SHL 16 WY N SEAL

Documents

Product Drawings

REC, 40P, BLK, N, FLANGE, D

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_DRC12-40PD_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_DRC12-40PD_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_DRC12-40PD_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.



Datasheets & Catalog Pages

CONNECTOR SELECTOR

English

Product Specifications

Application Specification

English

Agency Approvals

UL Report

English