

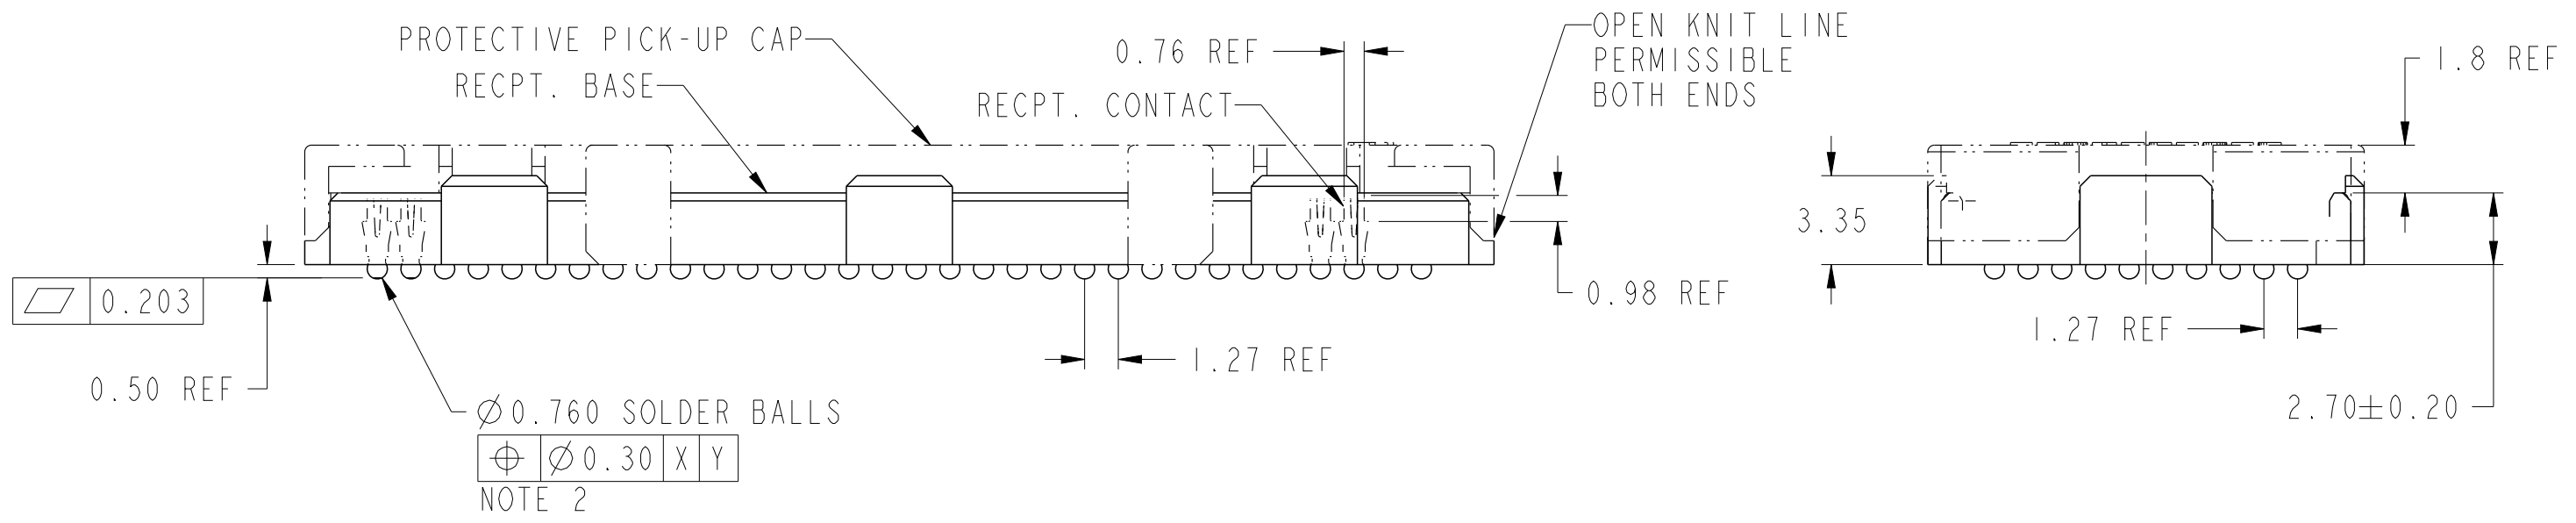


PRODUCT NUMBER
SEE SHEET 3

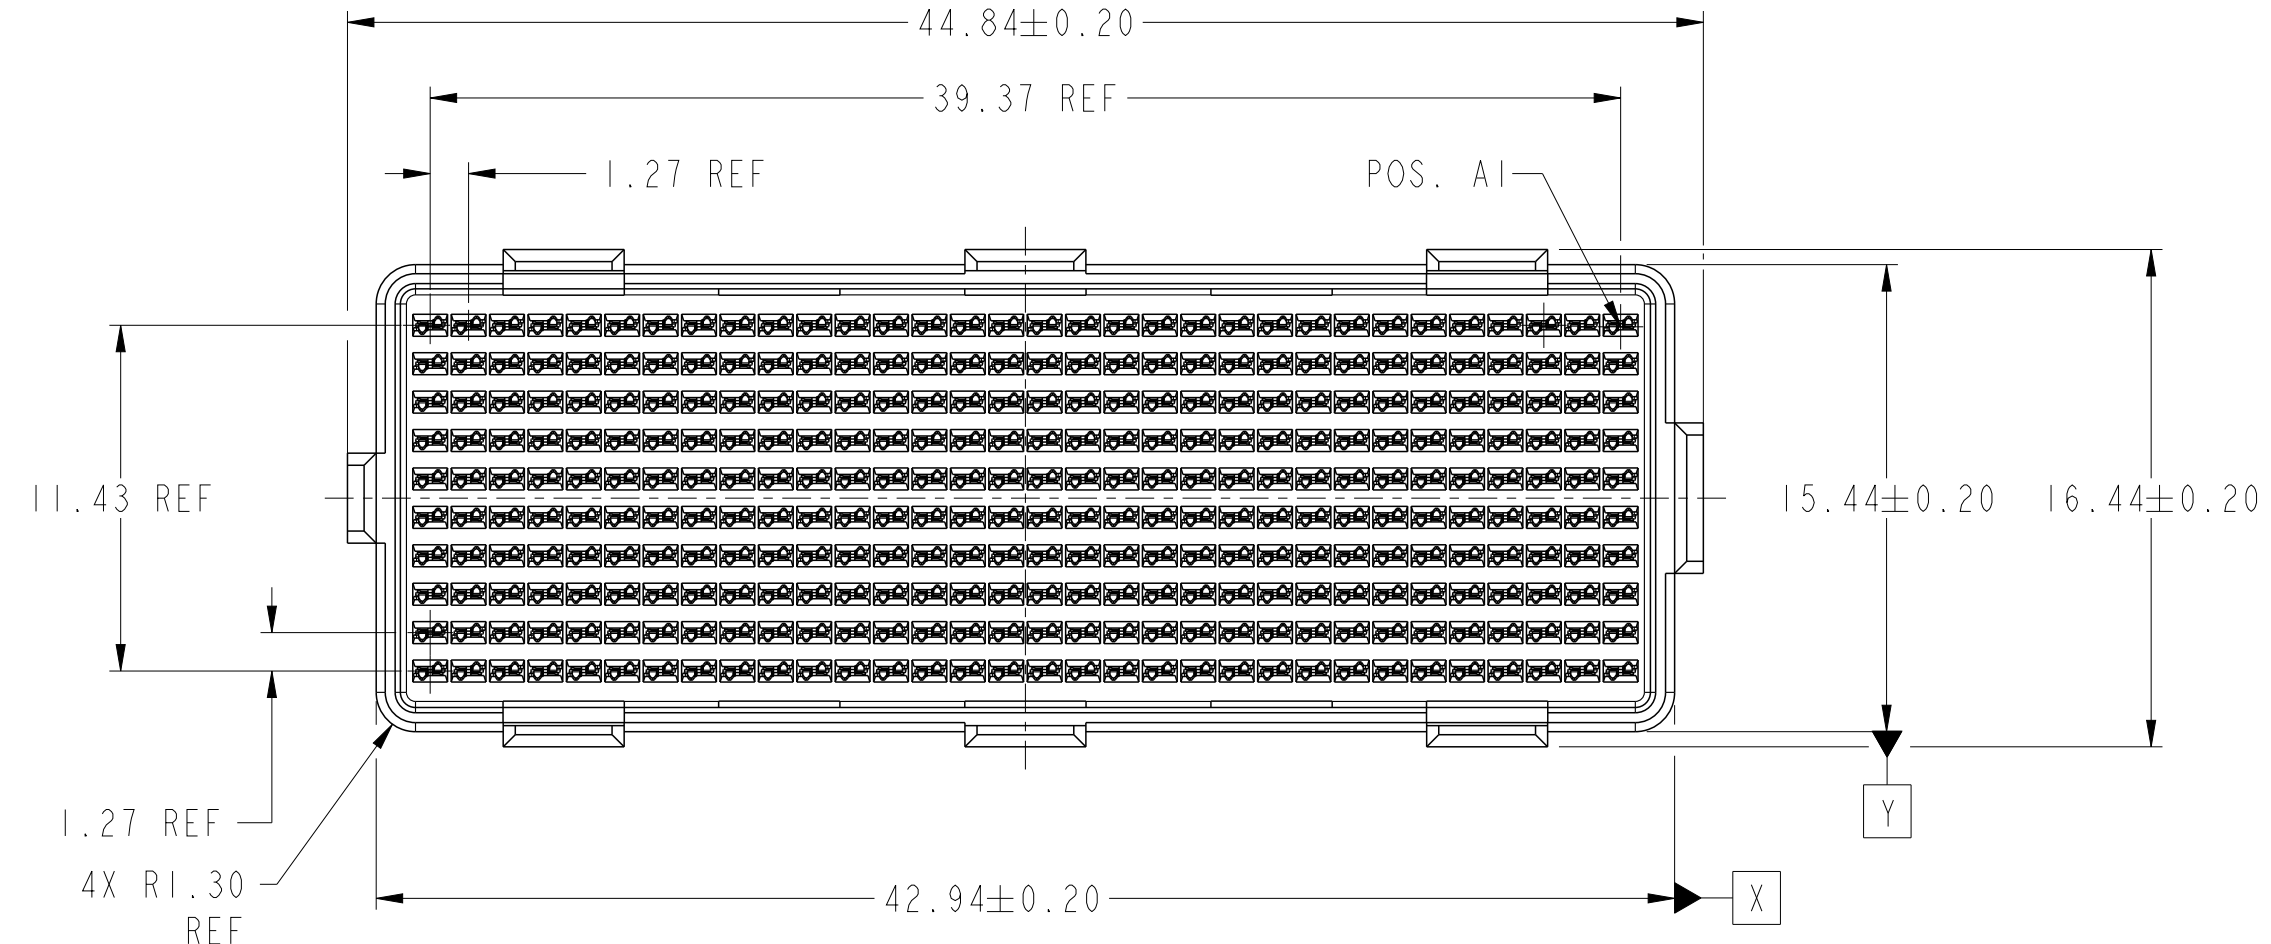


spec ref	-	dr	Dave Horchler	2013/01/22	projection	mm	size	A3	scale	1:1
tolerance std	ASME Y14.5	eng	Chris Schroll	2021/03/26	chr	-	ecn no	ELX-V-40495-1	rel level	Released
surface	3.2	appr	Matthew Emenhe	2021/04/13	product family	MEG-ARRAY	rel level	Released	rev	B
TOLERANCES UNLESS OTHERWISE SPECIFIED		Amphenol FCI	4mm RECEPTACLE ASSEMBLY -NATURAL	10 X 32 = 320 POS.	cat. no.	-	Product - Customer Drw	sheet 1 of 4		

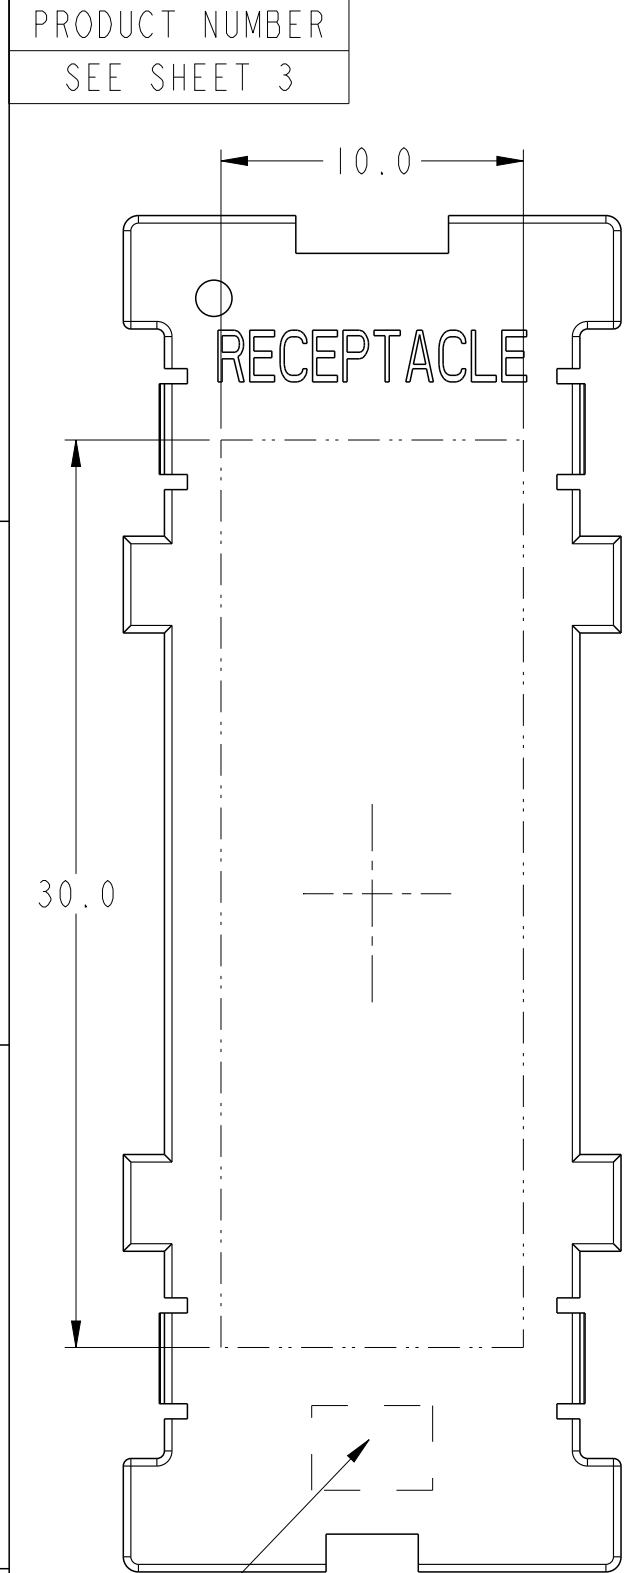


NOTE 6

FLAT AREA FOR
PICK-UP CAP

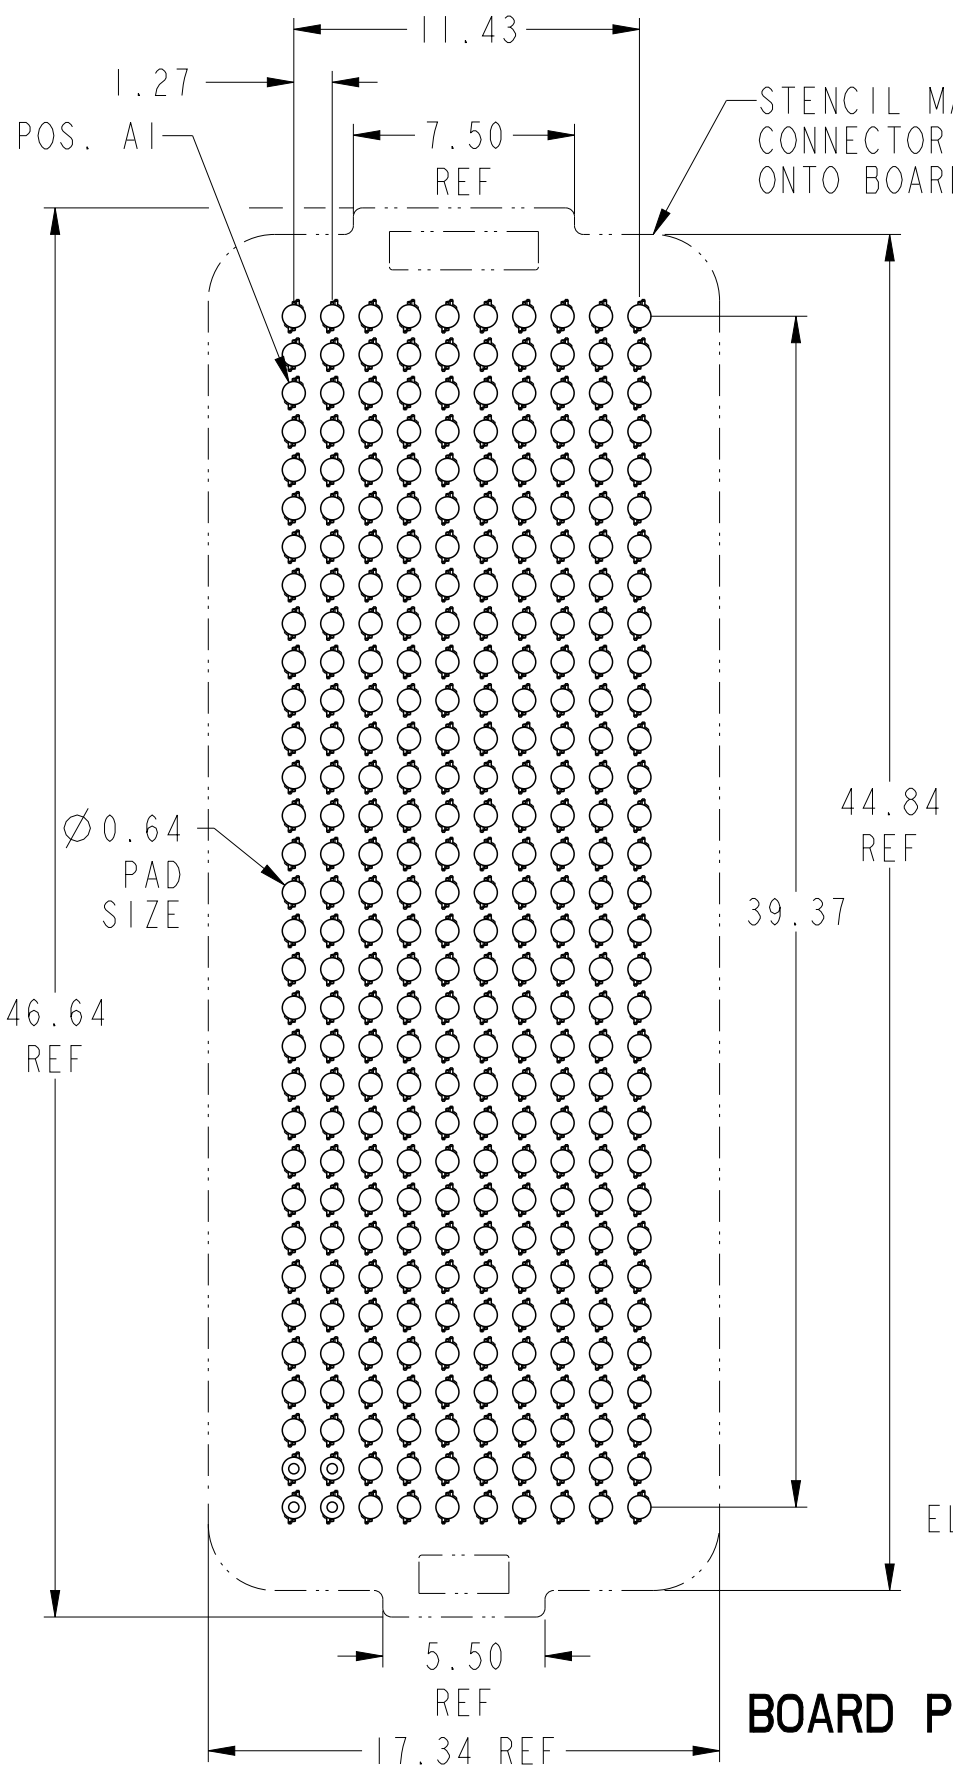


BOARD PATTERN

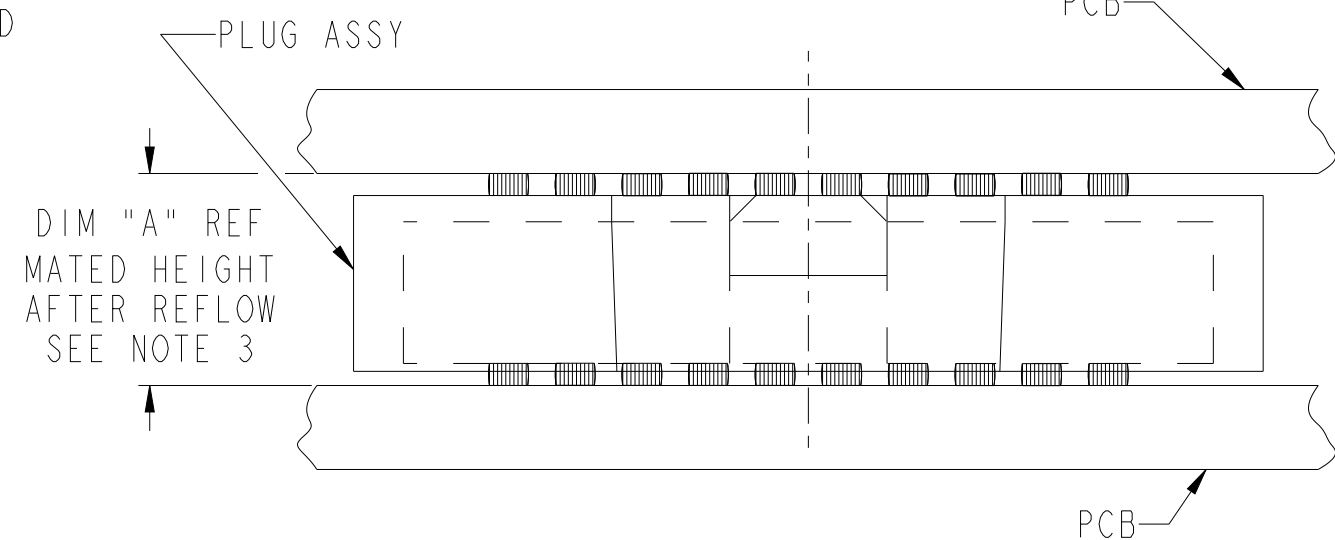

MATED HEIGHT AFTER REFLOW IS BASED ON \varnothing 0.64mm PAD (METAL-DEFINED) AND 0.13mm SOLDER PASTE STENCIL THICKNESS. SEE NOTE 3




END VIEW - MATED CONNECTORS
SCALE NONE

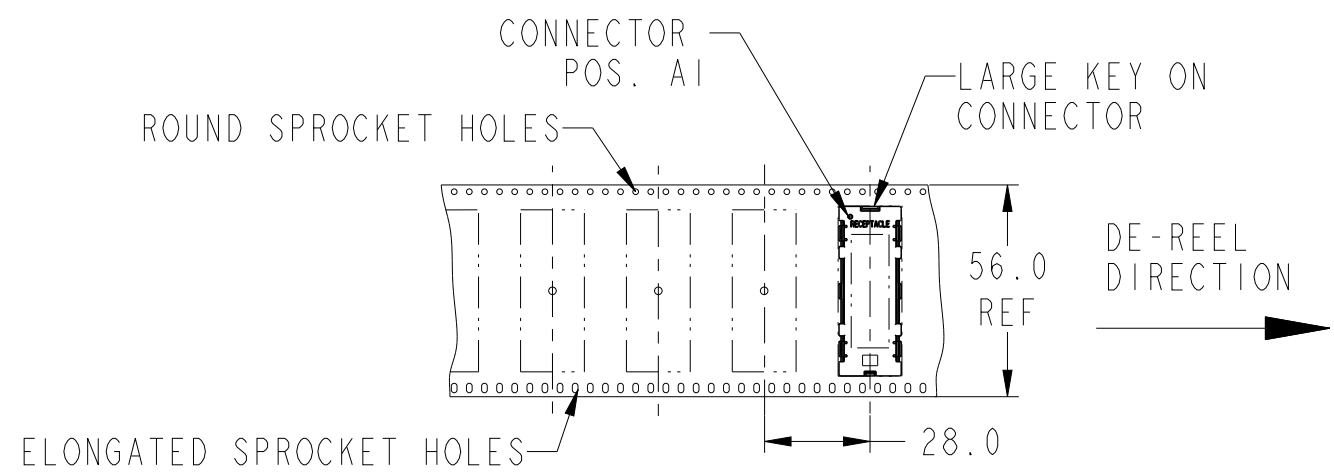

TAPE & REEL PACKAGING
PER EIA 481-3
SCALE NONE

spec ref	-	dr	Dave Horchler	2013/01/22	projection	mm	size	A3	scale	1:1
tolerance std	ASME Y14.5	eng	Chris Schroll	2021/03/26	chr	-	ecn no	ELX-V-40495-1	rel level	Released
surface	3.2	appr	Matthew Emenhe	2021/04/13	product family	MEG-ARRAY	rel level	Released	rev	B
linear	0.X	±0.3	Amphenol FCI	4mm RECEPTACLE ASSEMBLY -NATURAL	dwg no	10123982	cat. no.	-	Product - Customer Drw	sheet 2 of 4
angular	0°	±2°	amphenol-icc.com	10 X 32 = 320 POS.						

1		2		3		4		
PRODUCT NUMBER	PICK-UP CAP (NATURAL OR BLACK IN COLOR)	CONTACT PLATING AND THICKNESS	SOLDER BALL	NOTES	<div></div>			
10123982-001	YES	15u" (0.38um) Au	SnPb					
10123982-001BF	YES	15u" (0.38um) Au	SnPb	8				<div></div>
10123982-001LF	YES	15u" (0.38um) Au	LEAD FREE	5				<div></div>
10123982-001BLF	YES	15u" (0.38um) Au	LEAD FREE	5 AND 8				
10123982-091	YES	15u" (0.38um) GXT	SnPb					<div></div>
10123982-091BF	YES	15u" (0.38um) GXT	SnPb	8				
10123982-091LF	YES	15u" (0.38um) GXT	LEAD FREE	5				<div></div>
10123982-091BLF	YES	15u" (0.38um) GXT	LEAD FREE	5 AND 8				
10123982-101	YES	30u" (0.76um) Au	SnPb					<div></div>
10123982-101BF	YES	30u" (0.76um) Au	SnPb	8				
10123982-101LF	YES	30u" (0.76um) Au	LEAD FREE	5				<div></div>
10123982-101BLF	YES	30u" (0.76um) Au	LEAD FREE	5 AND 8				
10123982-191	YES	30u" (0.76um) GXT	SnPb					<div></div>
10123982-191BF	YES	30u" (0.76um) GXT	SnPb	8				
10123982-191LF	YES	30u" (0.76um) GXT	LEAD FREE	5				<div></div>
10123982-191BLF	YES	30u" (0.76um) GXT	LEAD FREE	5 AND 8				
10123982-201	YES	50u" (1.27um) Au SPECIAL	SnPb	7				<div></div>
10123982-201BF	YES	50u" (1.27um) Au SPECIAL	SnPb	7 AND 8				
10123982-201LF	YES	50u" (1.27um) Au SPECIAL	LEAD FREE	5 AND 7				<div></div>
10123982-201BLF	YES	50u" (1.27um) Au SPECIAL	LEAD FREE	5, 7 AND 8				
10123982-291	YES	50u" (1.27um) GXT SPECIAL	SnPb	7	<div></div>			
10123982-291BF	YES	50u" (1.27um) GXT SPECIAL	SnPb	7 AND 8				
10123982-291LF	YES	50u" (1.27um) GXT SPECIAL	LEAD FREE	5 AND 7	<div></div>			
10123982-291BLF	YES	50u" (1.27um) GXT SPECIAL	LEAD FREE	5, 7 AND 8				

spec ref -		dr	Dave Horchler	2013/01/22	<div>projection</div> <div></div>	<div>mm</div> <div></div>	size	A3	scale	1:1
tolerance std ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Chris Schroll	2021/03/26			ecn no	ELX-V-40495-1		
		chr	-	-			rel level	Released		
		appr	Matthew Emenhe	2021/04/13	product family		MEG-ARRAY			
surface 3.2 <div></div>	linear	0.X	±0.3	<div>Amphenol FCi</div>	<div>4mm RECEPTACLE ASSEMBLY -NATURAL</div> <div>10 X 32 = 320 POS.</div>	<div>dwg no</div> <div>10123982</div>	rev	B		
		0.XX	±0.10							
		0.XXX	±0.050							
ASME Y14.5	angular	0°	±2°	amphenol-icc.com	cat. no.	-	Product - Customer Drw		sheet 3 of 4	

NOTES:

1. MATERIAL:
HOUSING: LCP-NATURAL COLOR
CONTACT: COPPER ALLOY

PLATING:
CONTACT: SEE TABLE FOR PLATING AND THICKNESS OPTIONS (OVER Ni UNDERPLATE)
SOLDER BALL: SnPb OR LEAD FREE (95.5Sn/4Ag/0.5Cu) OPTIONS, SEE TABLE.

2. SOLDER BALLS WILL NOT HAVE PERFECT SPHERICAL SHAPES DUE TO REFLOW ATTACHMENT.

3. MATED HEIGHT WHEN MATED WITH 10123981-XXX WILL BE APPROXIMATELY 4mm.
MATED HEIGHT WILL BE EFFECTED BY CUSTOMER'S PCB DESIGN AND REFLOW PROCESS.

4. FOR PROPER APPLICATION FOLLOW FCI APPLICATION SPECIFICATION GS-20-033.
LEAD FREE SOLDER BALLS WILL NOT SOLDER PROPERLY IN A LEADED SOLDER PROCESS
DUE TO A HIGHER REFLOW TEMPERATURE. LEAD FREE PRODUCT IS THEREFORE NOT BACKWARDS
COMPATIBLE WITH LEADED OR SOME SOLDERING APPLICATIONS. REFERENCE FCI APPLICATION SPEC.





5. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004.
PRODUCT MEETING THIS DIRECTIVE IS IDENTIFIED IN THE LOT CODE NUMBER MARKED ON EACH PART BY HAVING AN "X"
IN THE SEVENTH CHARACTER POSITION.

6. CURRENT COMPANY LOGO TO BE VISIBLE IN APPROXIMATE AREA SHOWN.

7. PLATING FOR THE -2XX SERIES OF PRODUCT NUMBERS MEET THE REQUIREMENTS OF
GR-1217-CORE, CENTRAL OFFICE ENVIRONMENT, (25 YEAR LIFE EXPECTANCY).
THE CONTACTS IN THESE PRODUCT NUMBERS ALSO HAVE SPECIAL CONTACT GEOMETRY.

8. FOR THESE DASH NUMBERS, PRODUCT IS BERYLLIUM FREE.

9. A  SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW OR NOTE THAT
HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

spec ref -				dr	Dave Horchler	2013/01/22			size	A3	scale	1:1
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Chris Schroll	2021/03/26			ecn no ELX-V-40495-1			
ASME Y14.5				chr	-	-			rel level Released			
-				appr	Matthew Emenhe	2021/04/13	product family MEG-ARRAY					
 surface 3.2 ASME Y14.5	linear	0.X	±0.3		title	4mm RECEPTACLE ASSEMBLY -NATURAL 10 X 32 = 320 POS.			dwg no	10123982		rev B
		0.XX	±0.10									
	0.XXX	±0.050										
angular	0°	±2°	amphenol-icc.com	cat. no.	-	Product - Customer Drw				sheet 4 of 4		