


SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed:
250 °C/10 seconds at terminals

Mechanical Data

Case : JEDEC DO-214AA/SMB molded plastic body
 Terminals : Solderable per MIL-STD-750, Method 2026
 Polarity : Color band denotes cathode end Mounting
 Position : Any
 Weight : 0.0034 ounce, 0.1grams

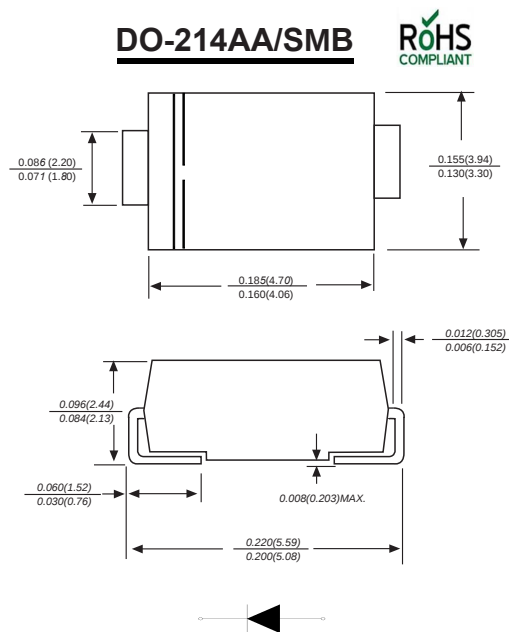

Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	MDD SK82B	MDD SK84B	MDD SK86B	MDD SK810B	MDD SK812B	MDD SK815B	MDD SK820B	UNITS
Marking Code									
Maximum repetitive peak reverse voltage	V _{RRM}	20	40	60	100	120	150	200	V
Maximum RMS voltage	V _{RMS}	14	28	42	70	84	105	140	V
Maximum DC blocking voltage	V _{DC}	20	40	60	100	120	150	200	V
Maximum average forward rectified current	I _(AV)	8.0							A
Peak forward surge current 8.3ms single half sine-wave superimposed onrated load (JEDEC Method)	I _{FSM}	150							A
Maximum instantaneous forward voltage at 8.0A	V _F	0.45	0.55	0.70	0.85				V
Maximum DCreverse current at rated DCblocking voltage T _A =25℃ T _A =100℃	I _R	1.0 50							mA
Typical junction capacitance ⁽¹⁾	C _J	400		700					pF
Typical thermal resistance ⁽²⁾	R _{θJA}	50							℃/W
Operating junction temperature range	T _J	-55 to +125							℃
Storage temperature range	T _{STG}	-55 to +150							℃

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. P.C.B. mounted with 2.0x2.0" (5.0x5.0cm) copper pad areas

Typical Characteristics

Fig.1 Forward Current Derating Curve

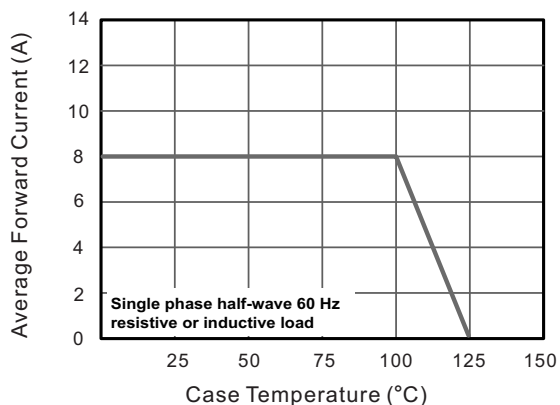


Fig.2 Typical Reverse Characteristics

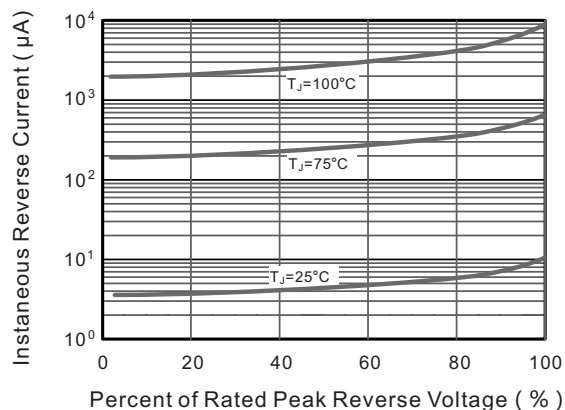


Fig.3 Typical Forward Characteristic

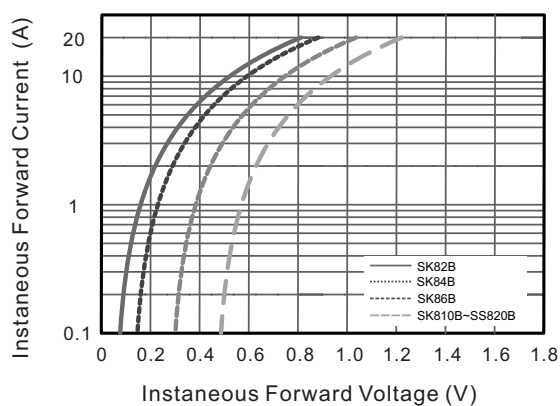


Fig.4 Typical Junction Capacitance

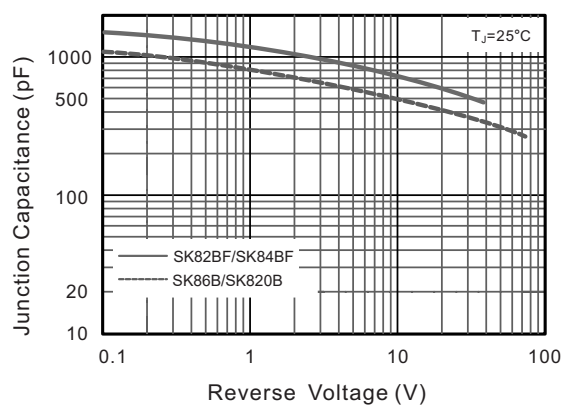


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current



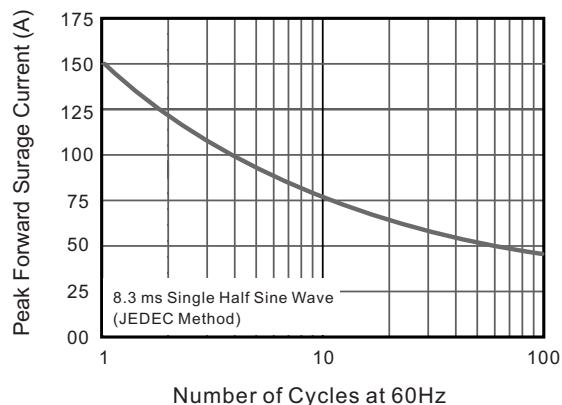


Fig.6- Typical Transient Thermal Impedance

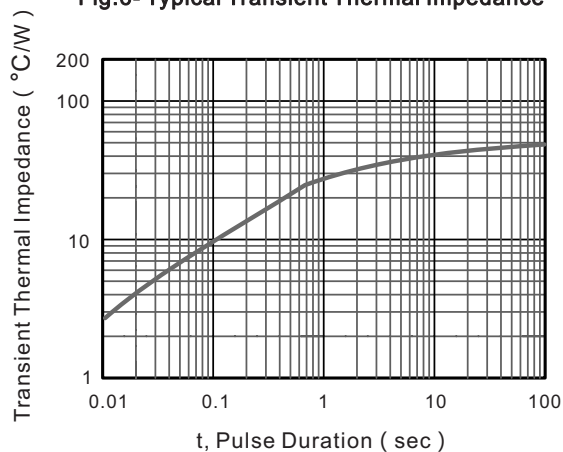

The curve above is for reference only.

Packing information

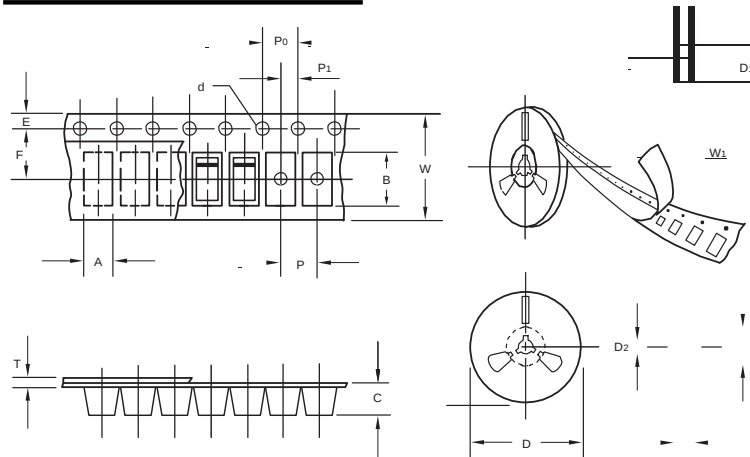

unit:mm


Item	Symbol	Tolerance	SMA
Carrier width	A	0.1	2.80
Carrier length	B	0.1	5.33
Carrier depth	C	0.1	2.36
Sprocket hole	d	0.05	1.50
13" Reel outside diameter	D	2.0	330.00
13" Reel inner diameter	D1	min	50.00
7" Reel outside diameter	D	2.0	178.00
7" Reel inner diameter	D1	min	62.00
Feed hole diameter	D2	0.5	13.00
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	5.50
Punch hole pitch	P	0.1	4.00
Sprocket hole pitch	P0	0.1	4.00
Embossment center	P1	0.1	2.00
Overall tape thickness	T	0.1	0.28
Tape width	W	0.3	12.00
Reel width	W1	1.0	18.00

Note: Devices are packed in accordance with EIA standard RS-481-A and specifications listed above.

Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (mm)	BOX (pcs)	INNER BOX (mm)	REEL DIA, (mm)	CARTON SIZE (mm)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
SMB	13"	3,000	4.0	6,000	190*190*41	330	365*365*360	48,000	14.0

Suggested Pad Layout

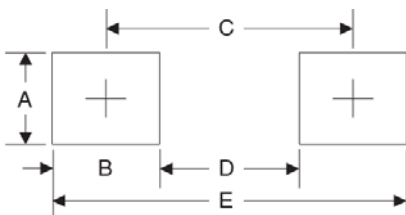

Symbol	Unit (mm)	Unit (inch)
A	1.68	0.066
B	1.52	0.060
C	3.93	0.154
D	2.41	0.095
E	5.45	0.215