

MDF13N65B / MDFS13N65B

N-Channel MOSFET 650V, 14A, 0.46Ω

General Description

These N-channel MOSFET are produced using advanced MagnaChip's MOSFET Technology, which provides low on-state resistance, high switching performance and excellent quality.


These devices are suitable device for SMPS, high Speed switching and general purpose applications.

Features

- $V_{DS} = 650V$
- $I_D = 14A$ @ $V_{GS} = 10V$
- $R_{DS(ON)} \leq 0.46\Omega$ @ $V_{GS} = 10V$

Applications


- Power Supply
- PFC
- High Current, High Speed Switching



TO-220F



TO-220FT

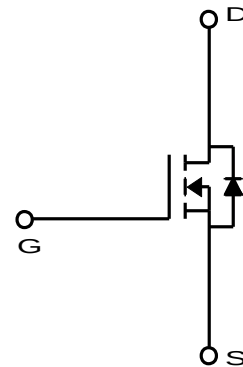

Absolute Maximum Ratings ($T_a = 25^\circ C$)

Characteristics		Symbol	Rating	Unit
Drain-Source Voltage		V_{DSS}	650	V
Gate-Source Voltage		V_{GSS}	± 30	V
Continuous Drain Current	$T_C = 25^\circ C$	I_D	14*	A
	$T_C = 100^\circ C$		8.8*	A
Pulsed Drain Current ⁽¹⁾		I_{DM}	56*	A
Power Dissipation	$T_C = 25^\circ C$	P_D	36.7	W
	Derate above $25^\circ C$		0.29	W/ $^\circ C$
Repetitive Avalanche Energy ⁽¹⁾		E_{AR}	23.1	mJ
Peak Diode Recovery dv/dt ⁽³⁾		dv/dt	4.5	V/ns
Single Pulse Avalanche Energy ⁽⁴⁾		E_{AS}	800	mJ
Junction and Storage Temperature Range		T_J, T_{stg}	-55~150	$^\circ C$

* I_D limited by maximum junction temperature

Thermal Characteristics

Characteristics	Symbol	Rating	Unit
Thermal Resistance, Junction-to-Ambient ⁽¹⁾	$R_{\theta JA}$	62.5	$^\circ C/W$
Thermal Resistance, Junction-to-Case ⁽¹⁾	$R_{\theta JC}$	3.4	

Ordering Information

Part Number	Marking	Temp. Range	Package	Packing	RoHS Status
MDF13N65BTH	MDF13N65B	-55~150°C	TO-220F	Tube	Halogen Free
MDFS13N65BTH	MDFS13N65B	-55~150°C	TO-220FT	Tube	Halogen Free

Electrical Characteristics (Ta =25°C)

Characteristics	Symbol	Test Condition	Min	Typ	Max	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	BV _{DSS}	I _D = 250μA, V _{GS} = 0V	650	-	-	V
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250μA	2.0	-	4.0	
Drain Cut-Off Current	I _{DSS}	V _{DS} = 600V, V _{GS} = 0V	-	-	1	μA
Gate Leakage Current	I _{GSS}	V _{GS} = ±30V, V _{DS} = 0V	-	-	100	nA
Drain-Source ON Resistance	R _{DS(ON)}	V _{GS} = 10V, I _D = 7A		0.40	0.46	Ω
Forward Transconductance	g _{fs}	V _{DS} = 30V, I _D = 7A	-	3.7	-	S
Dynamic Characteristics						
Total Gate Charge	Q _g	V _{DS} = 520V, I _D = 14.0A, V _{GS} = 10V ⁽³⁾	-	54	-	nC
Gate-Source Charge	Q _{gs}		-	13	-	
Gate-Drain Charge	Q _{gd}		-	21	-	
Input Capacitance	C _{iss}	V _{DS} = 25V, V _{GS} = 0V, f = 1.0MHz	-	2400	-	pF
Reverse Transfer Capacitance	C _{rss}		-	12.8	-	
Output Capacitance	C _{oss}		-	243	-	
Turn-On Delay Time	t _{d(on)}	V _{GS} = 10V, V _{DS} = 325V, I _D = 14.0A, R _G = 25Ω ⁽³⁾	-	32	-	nS
Rise Time	t _r		-	81	-	
Turn-Off Delay Time	t _{d(off)}		-	204	-	
Fall Time	t _f		-	76	-	
Drain-Source Body Diode Characteristics						
Maximum Continuous Drain to Source Diode Forward Current	I _S		-	14	-	A
Source-Drain Diode Forward Voltage	V _{SD}	I _S = 14.0A, V _{GS} = 0V	-		1.4	V
Body Diode Reverse Recovery Time	t _{rr}	I _F = 14.A, dI/dt = 100A/μs ⁽³⁾	-	377	-	nS
Body Diode Reverse Recovery Charge	Q _{rr}		-	8.2	-	μC

Note :

1. Pulse width is based on $R_{\theta JC}$ & $R_{\theta JA}$ and the maximum allowed junction temperature of 150°C.
2. Pulse test: pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$, pulse width limited by junction temperature $T_{J(MAX)}=150^\circ C$.
3. $I_{SD} \leq 7.0A$, $di/dt \leq 200A/\mu s$, $V_{DD} \leq BV_{DSS}$, $R_G = 25\Omega$, Starting $T_J = 25^\circ C$
4. $L = 7.6mH$, $I_{AS} = 14.0A$, $V_{DD} = 50V$, $R_G = 25\Omega$, Starting $T_J = 25^\circ C$,

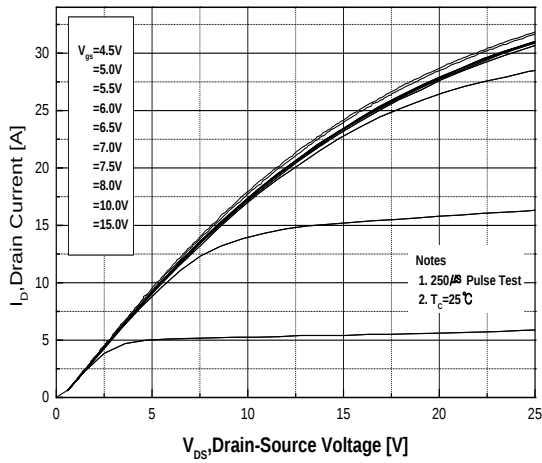


Fig.1 On-Region Characteristics

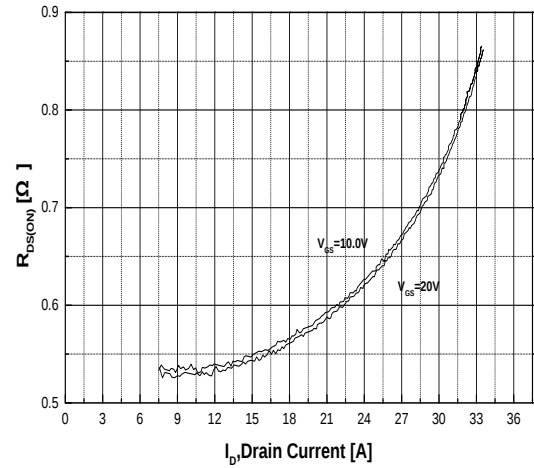


Fig.2 On-Resistance Variation with Drain Current and Gate Voltage

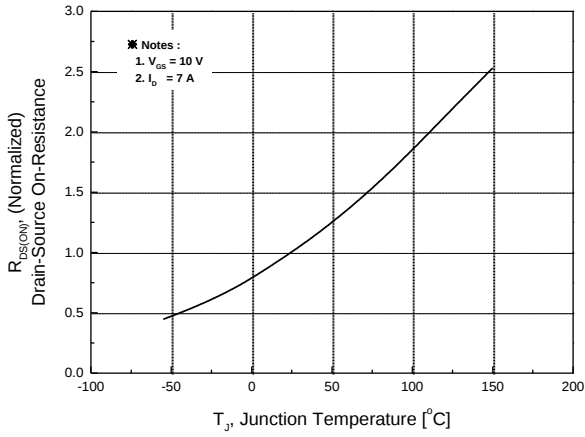


Fig.3 On-Resistance Variation with Temperature

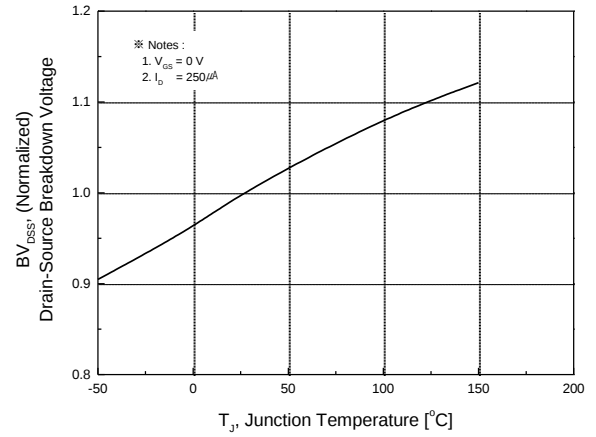


Fig.4 Breakdown Voltage Variation vs. Temperature

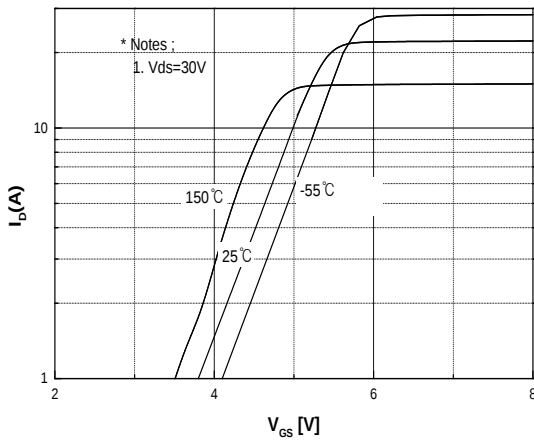


Fig.5 Transfer Characteristics

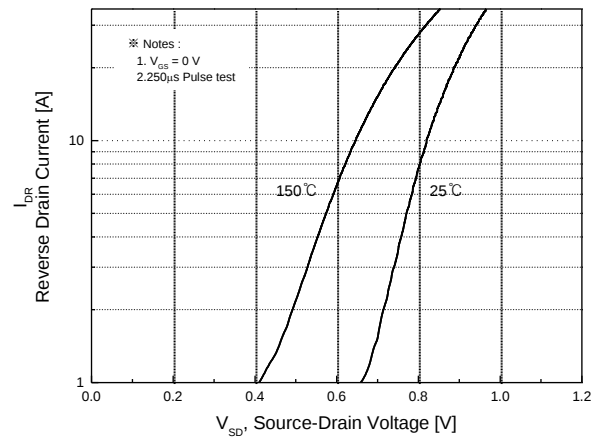


Fig.6 Body Diode Forward Voltage Variation with Source Current and Temperature

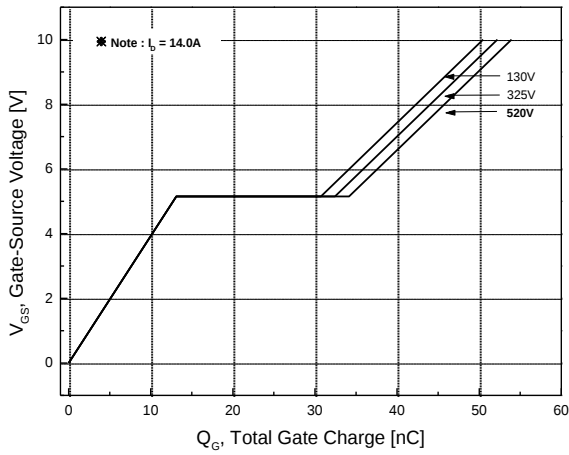


Fig.7 Gate Charge Characteristics

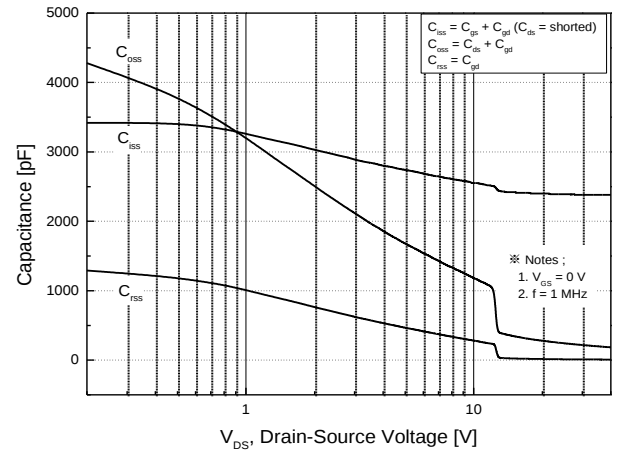


Fig.8 Capacitance Characteristics

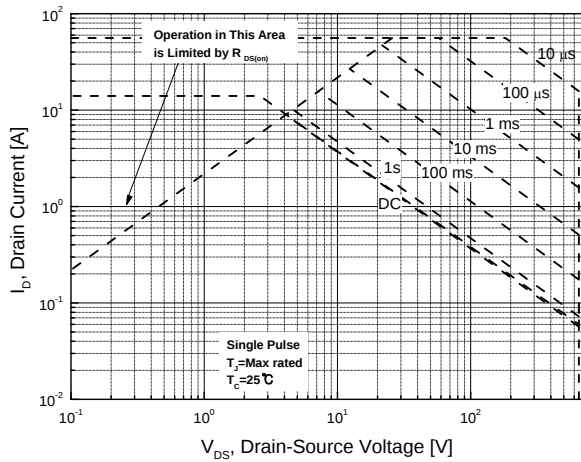


Fig.9 Maximum Safe Operating Area

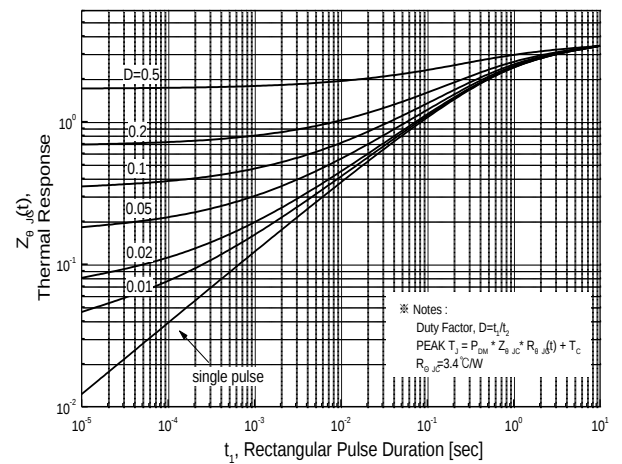


Fig.10 Transient Thermal Response Curve

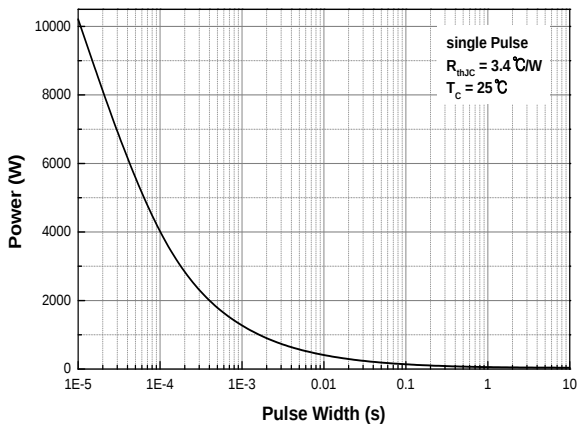


Fig.11 Single Pulse Maximum Power Dissipation


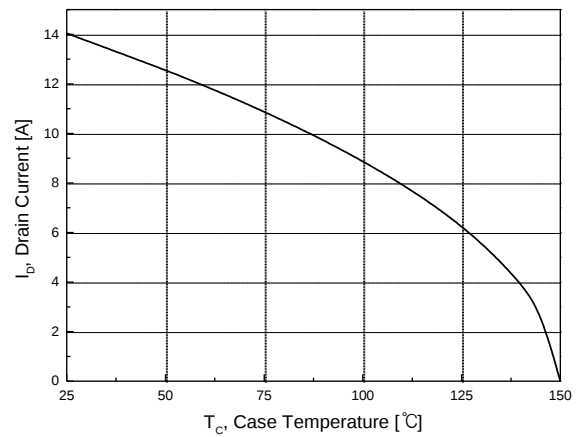


Fig.12 Maximum Drain Current vs. Case Temperature

Physical Dimensions

3 Leads, TO-220F

Dimensions are in millimeters unless otherwise specified

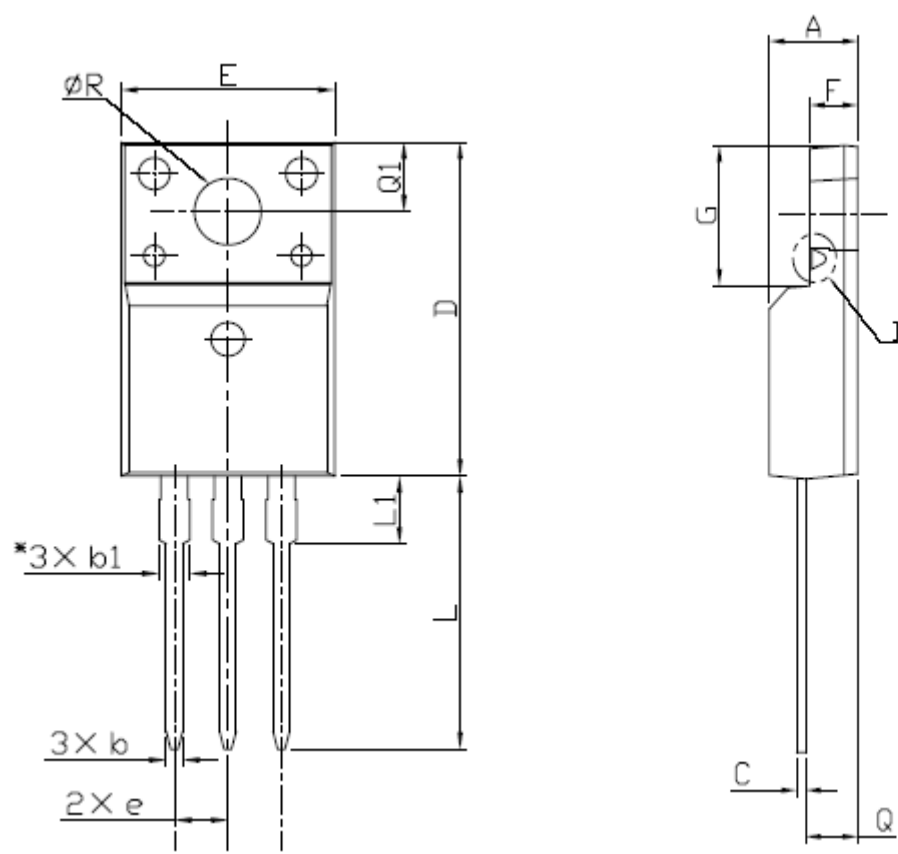


Symbol	Min	Nom	Max
A	4.50		4.93
b	0.63		0.91
b1	1.15		1.47
C	0.33		0.63
D	15.47		16.13
E	9.60		10.71
e		2.54	
F	2.34		2.84
G	6.48		6.90
L	12.24		13.72
L1	2.79		3.67
Q	2.52		2.96
Q1	3.10		3.50
$\varnothing R$	3.00		3.55

Physical Dimensions

3 Leads, TO-220FT (G)

Dimensions are in millimeters unless otherwise specified

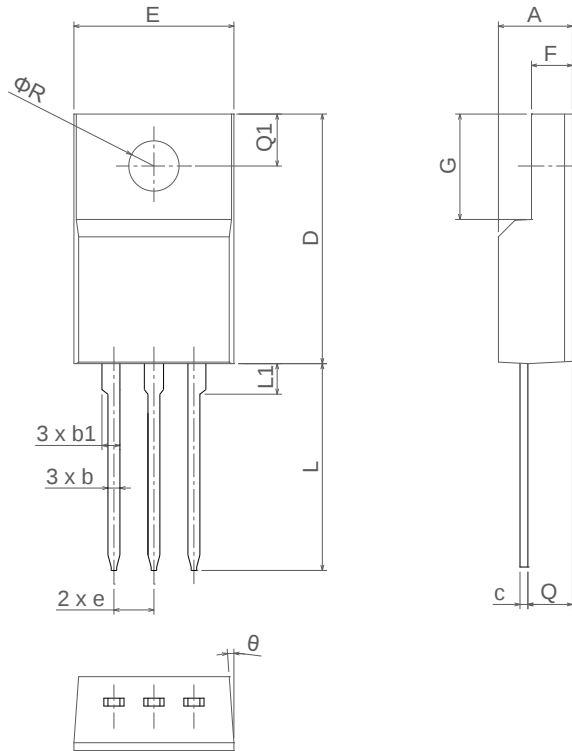

Symbol	Dimension [mm]		
	Min	Nom	Max
A	4.55	-	4.85
b	0.59	-	0.79
b1	1.14	-	1.22
c	0.45	-	0.60
D	15.72	-	16.02
E	10.01	-	10.31
e	2.54 BSC		
F	2.42	-	2.74
G	6.55	-	6.85
L	12.80	-	13.20
L1	1.85	-	2.15
Q	2.66	-	2.86
Q1	3.20	-	3.40
ΦR	3.08	-	3.28
θ	5°	-	9°

DISCLAIMER:

The Products are not designed for use in hostile environments, including, without limitation, aircraft, nuclear power generation, medical appliances, and devices or systems in which malfunction of any Product can reasonably be expected to result in a personal injury. Seller's customers using or selling Seller's products for use in such applications do so at their own risk and agree to fully defend and indemnify Seller.

MagnaChip reserves the right to change the specifications and circuitry without notice at any time. MagnaChip does not consider responsibility for use of any circuitry other than circuitry entirely included in a MagnaChip product.  is a registered trademark of MagnaChip Semiconductor Ltd.