


RECOMMENDED PCB LAYOUT



N = Number of poles

Dim A=Nx5.08

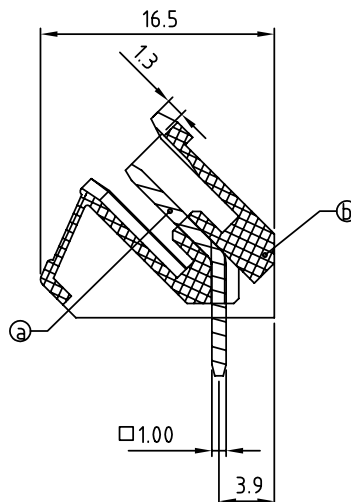


Dim B=(N-1)x5.08

	Dim A	Dim B
2-6p	±0.15	±0.10
7-12p	±0.20	±0.20
13-18p	±0.30	±0.25
19-24p	±0.40	±0.30

SIGN	DATE	DESCRIPTION	APPROVER
△	8/07'06	Added VDE and TUV standard	梁仁松
△	1/27'07	Soldering temperature changed from 245° to 250°	Tony
△	2009.10.27	The operating temperature is changed	Jacke
△	2009.10.27	The material is changed from Brass to Copper	Jacke
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material:

- Item ③ Male contact pin:Copper Tin plated
- Item ④ Terminal (housing): Thermoplastic (UL94V-0)

- △ Electrical: cULus /VDE/TUV
 - Voltage rating: 300V/300V/300V
 - Current rating: 15A/17A/20A
 - Withstanding Voltage: 1.6 KV/2.5KV/2.5KV
 - Operating temperature: -40°C to +115°C
 - △ Soldering temperature: 250°C±10°C/5 Sec
 - Safety Approval:   

VK xx 5 0 x 0 xxxx G

No. OF POLES
02: 2 POLES
:
24: 24 POLES

COLOR

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)


G: Pb<40000ppm

0000: "@" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		VK-5.08 Series Open type			
PART NO.	VKxx50x0xxxxG			DWG NO.	8VK0302
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Jacke 2010.01.26	Tony 2007.01.27		Tolerance
				UNIT: mm	X. ±0.50
				SCALE: NONE	X.X ±0.30
				SHEET: 01/01	X.XX ±0.10
				REV.: F	X° ±1°

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

<u>VK0950500000G</u>	<u>VK1450500000G</u>	<u>VK0650500000G</u>	<u>VK0250500000G</u>	<u>VK0350500000G</u>	<u>VK0450500000G</u>
<u>VK0550500000G</u>	<u>VK0750500000G</u>	<u>VK0850500000G</u>	<u>VK1050500000G</u>	<u>VK1150500000G</u>	<u>VK1250500000G</u>
<u>VK1350500000G</u>	<u>VK1550500000G</u>	<u>VK1650500000G</u>	<u>VK1750500000G</u>	<u>VK1850500000G</u>	<u>VK1950500000G</u>
<u>VK2050500000G</u>	<u>VK2150500000G</u>	<u>VK2250500000G</u>	<u>VK2350500000G</u>	<u>VK2450500000G</u>	