

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	1	PRELIMINARY RELEASE	130830	AT	JFP


D

C



B

A

MAIN POLARIZING
KEYWAY

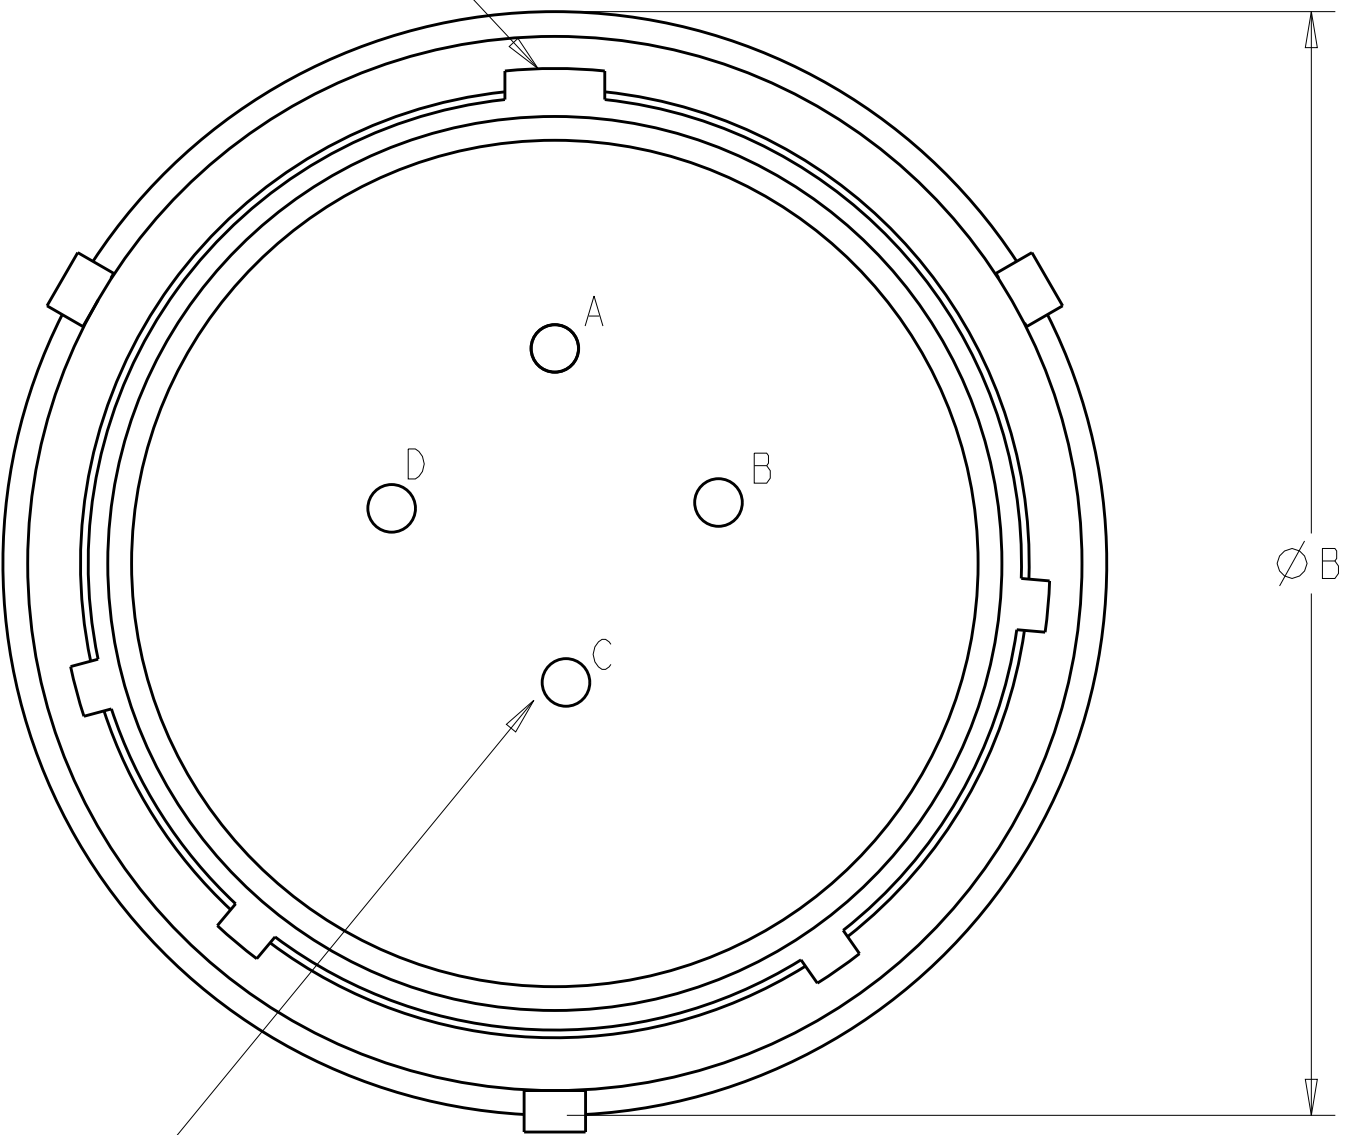

PIN ARR. &
CAV. ID SHOWN
FOR REF. ONLY

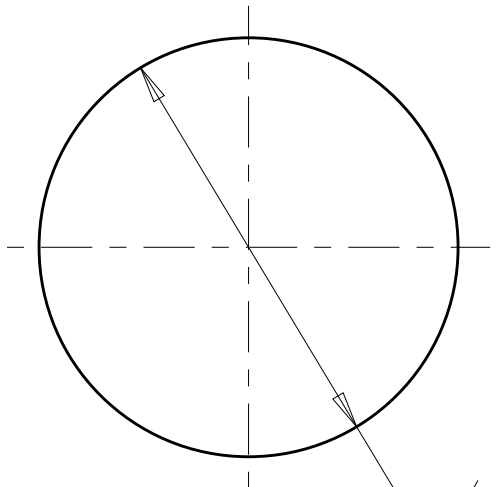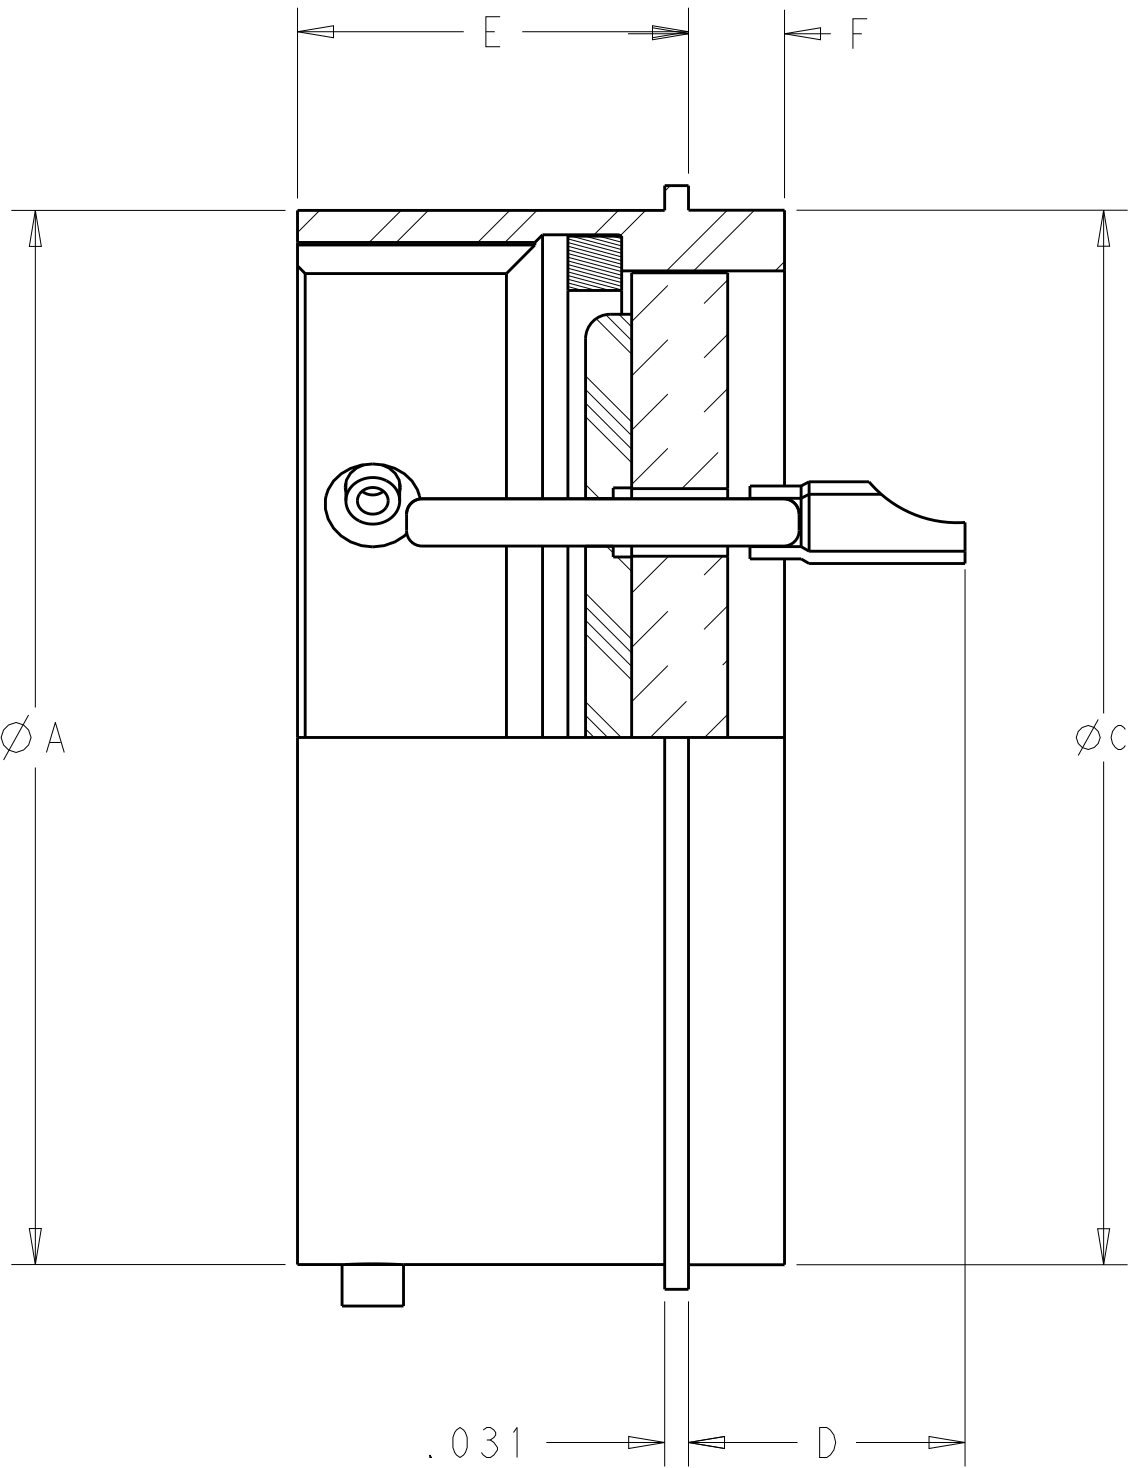

Ø G
PANEL CUTOUT

D

C

B

A

4. MATERIAL: GLASS - COMPRESSION;
SHELL - MILD STEEL;
CONTACTS - NICKEL ALLOY;
INSERT/O-RING - ELASTOMER;

3. FINISH: SHELL - BRIGHT TIN OVER NICKEL;
CONTACTS - GOLD OVER NICKEL;

2. CONTACT IDENTIFICATION: CONTRASTING COLOR TO INSERT MATERIAL.

1. INSERTS ARE CONTINUOUS DIELECTRIC.

NOTE(S):

SHELL SIZE	PART NUMBER	A _{+0.001 -0.005}	B MAX	C _{+0.001 -0.005}	D MAX	E _{+0.020 -0.010}	F ±0.010	G _{+0.010 -0.000}	WT LBS
8	22628-8-xxPx-791	.473	.635	.562	.386	.447	.094	.572	.016
10	22628-10-xxPx-791	.590	.760	.672	.386	.447	.094	.682	.020
12	22628-12-xxPx-791	.750	.854	.781	.386	.447	.094	.791	.031
14	22628-14-xxPx-791	.875	.979	.906	.386	.447	.094	.916	.039
16	22628-16-xxPx-791	1.000	1.104	1.031	.386	.447	.094	1.041	.044
18	22628-18-xxPx-791	1.125	1.228	1.156	.386	.447	.094	1.166	.063
20	22628-20-xxPx-791	1.250	1.322	1.250	.386	.509	.094	1.260	.083
22	22628-22-xxPx-791	1.375	1.448	1.375	.418	.509	.125	1.385	.095
24	22628-24-xxPx-791	1.500	1.574	1.500	.418	.542	.125	1.510	.141

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. TEUNISSEN CHK J. PASCUAL APVD A. RENGIFO	130830 130830 130909	TE Connectivity	
DIMENSIONS: INCH	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC		NAME	
	0 PLC ±- 1 PLC ±.1 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0005 ANGLES ±- FINISH	APPLICATION SPEC		SIZE	
	MATERIAL SEE NOTE 4 -	MS3113		CAGE CODE	
SEE NOTE 3 -		WEIGHT SEE TABLE A2		DRAWING NO	
		Customer Drawing		RESTRICTED TO	
		SCALE 4:1		SHEET 1 OF 1	
				REV 1	